

535 3W Cabinet Light LED



Our new slim profile plug & play range of LED puck lights measure just over 1/2" in depth so they can be recessed flush into any standard 5/8" millwork. Engineered with the latest generation LED technology, these low voltage millwork pucks can be energized in any combination from 1 to 12 fixtures per driver. So if you're looking for a beautiful, affordable puck light that will practically disappear into your millwork, you've scored!

FEATURES

- Utilizes low watt LED
- Lumen output: 190
- Push fit installation for recessed mount
- 6.56 ft [2m] lead standard
- 3m extension with connector sold separately
- Powered by a dimmable remote 24V DC constant voltage power supply, sold separately
- L70 @ 50,000 hours

DETAILS


Trim Class: 2"
Category: Accent & Cabinets
Shape: Round
Adjustability: Fixed




535-3W-Cabinet-Light-LED-Specs • Subject to change without notice • Rev 2017.06.20 • 1/5

Features & Lighting



RECESSED MOUNT

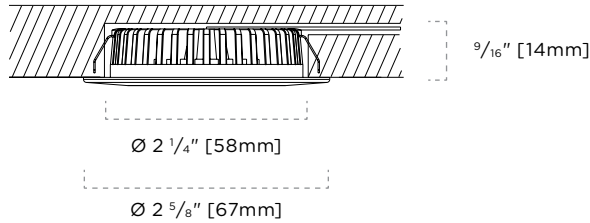



SURFACE MOUNT

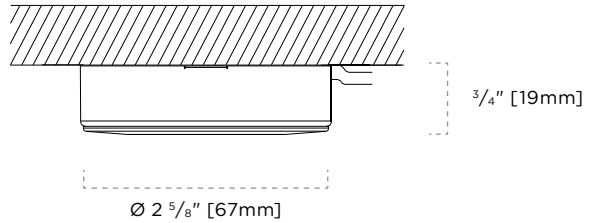


OPTIONAL INTEGRAL SNOOT



OPTIONAL INTEGRAL EYELID

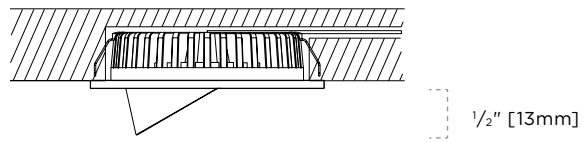

CEILING CUTOUT



BEAM SPREAD



FLANGE FINISHES

- White
- Black
- Nickel Plated

COLOR TEMPERATURES

- 2700
- 3000

CRI & LUMENS

CRI VALUE	90
LUMEN OUTPUT	190
LED WATTAGE	3



Photometric Data

52° BEAM, 2700K, 90 CRI

Report: L071603519
Trim Model: 535-058-01-2700K

OUTPUT

DISTANCE		BEAM DIAMETER		OUTPUT	
FT	M	FT	M	FC	LUX
1	0.30	2.6	0.79	74.7	804.2
2	0.60	5.1	1.55	18.7	201.1
3	0.91	7.7	2.35	8.3	89.4
4	1.21	10.2	3.11	4.7	50.3
5	1.52	12.8	3.90	3.0	32.2
6	1.82	15.4	4.69	2.1	22.3





52° BEAM, 3000K, 90 CRI

Report: L071603520
Trim Model: 535-058-01-3000K

OUTPUT

DISTANCE		BEAM DIAMETER		OUTPUT	
FT	M	FT	M	FC	LUX
1	0.30	2.6	0.79	76.6	825.1
2	0.60	5.1	1.55	19.2	206.3
3	0.91	7.7	2.35	8.5	91.7
4	1.21	10.2	3.11	4.8	51.6
5	1.52	12.8	3.90	3.1	33.0
6	1.82	15.4	4.69	2.2	22.9



Luminaires are tested to IESNA standards LM-79-08. Tested to Absolute Photometry.

535-3W-Cabinet-Light-LED-Specs • Subject to change without notice • Rev 2017.06.20 • 3/5


Compatible Drivers

PHASE DIMMING

Smooth, flicker-free dimming from 100% to 10%.


LED20W-24V-DIM120

Channels: 1
Voltage: 120
Min. Load Units: 1
Max. Load Units: 6




D20W-24V-DIM

Channels: 1
Voltage: 120
Min. Load Units: 1
Max. Load Units: 6



D40W-24V-DIM

Channels: 2
Voltage: 120
Min. Load Units: 1/Ch
Max. Load Units: 6/Ch



535

3W Cabinet Light LED

Project

Type

Notes

Product Code

1 2 3 4 5

1. Trim

535 3W Cabinet Light

2. Mounting

058 Recessed Mount

078 Surface Mount

3. Flange Finish

01 White

04 Black

11 Nickel Plated

4. Color Temperature

27 2700K

30 3000K

5. Options

3M 3M [9.84 ft] Extension

EYELID Optional Integral Eyelid ¹

SNOOT Optional Integral Snoot ¹

Notes

¹**EYELID** & **SNOOT** options are only available in **01** white & **04** Black flange finishes.

535-3W-Cabinet-Light-LED-Specs • Subject to change without notice • Rev 2017.06.20 • 5/5
