



## Drivers

DRX | Premium LED

### Downlight Remodel Driver

#### FEATURES

- Thermal feedback protection
- Compatible with R4P housings
- Rated for non insulated ceilings only
- 18 Ga. galvanized steel junction box
- Junction box allows for easy wire entry
- Approved for branch circuit wiring
- Design allows for installation of very shallow plenums as low as 4 1/2"

#### COMPATIBLE HOUSINGS

R4P-F-R

Round New Construction Plate  
3, 5, 7, 9 Series

L 6 1/2" [166mm]

W 6 3/8" [162mm]

H 1" [26mm]



R4P-F-S

Square New Construction Plate  
3, 5, 7, 9 Series


L 6 1/2" [166mm]

W 6 3/8" [162mm]



H 1" [26mm]

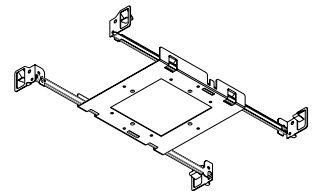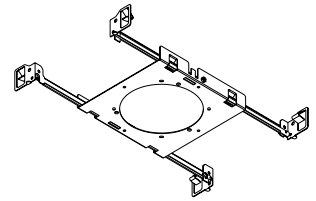

#### CEILING CUTOUT



#### DIMENSIONS

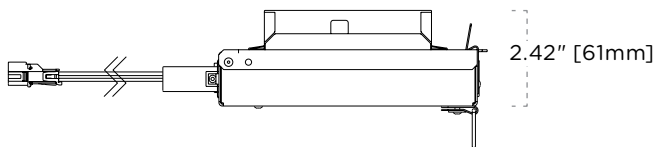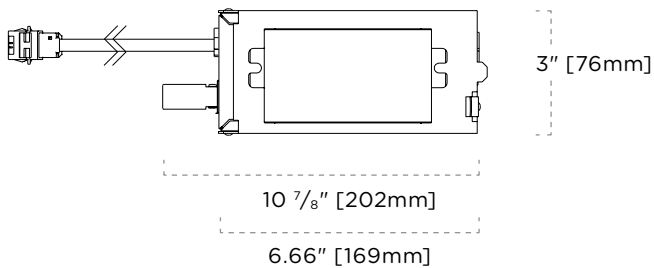

#### CERTIFICATIONS



# Drivers

DRX | Premium LED

## Downlight Remodel Driver



### TAG TYPE



### ORDER FORM

1	2	3	4

#### 1. DRIVER

**DRX**

#### 2. SERIES

- 3** XTM 1000 Lumens Max
- 5** XTM 1500 Lumens Max
- 7** XTM 2000 Lumens Max
- 9** XTM 2700 Lumens Max

#### 3. DIMMING

- D** DALI (1%)
- LE** Lutron Phase (1%)<sup>1</sup>
- LH** Lutron EcoSystem (1%)
- P** 0-10V Dimming (1%)
- P1** eldoLED Dimming (1%)
- S** Phase Dimming (5%)<sup>2</sup>

#### 4. VOLTAGE

**120**

**277**

#### NOTES

- 1** LE dimming is only available in 120 voltage.
- 2** S dimming with 277 voltage is non-dimming.