



Wall Lights

2-076 | Standard LED

5W Wall Light Enclosure

FEATURES

- Utilizes 2-400 series trim
- Concrete wall installation option available
- Designed for compatibility with a 350mA driver, optional remote driver sold separately.

COMPATIBLE DRIVERS

ELECTRONIC LOW VOLTAGE (ELV)

Smooth, flicker-free dimming from 100% to 20%.


D10W-DIM

Channels: 1

Min. Load Units: 1

Max. Load Units: 2

Voltage: 120




D15W-DIM

Channels: 1

Min. Load Units: 3

Max. Load Units: 3

Voltage: 120



0-10V DIMMING

Smooth, flicker-free dimming from 100% to 10%.


D1CH-DIM

Channels: 1

Min. Load Units: 1

Max. Load Units: 3

Voltage: 120/277




D2CH-DIM

Channels: 2

Min. Load Units: 1

Max. Load Units: 4/CH

Voltage: 120/277



0-10V DIMMING

SMOOTH, FLICKER-FREE DIMMING FROM 100% TO 1%.


D4CH-DIM

Channels: 2

Min. Load Units: 2

Max. Load Units: 4/CH



Voltage: 120/277





CERTIFICATIONS



NON-INSULATED & INSULATED

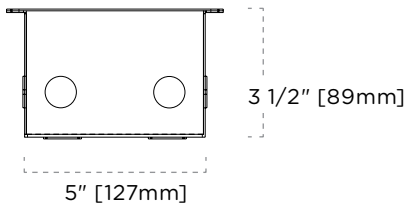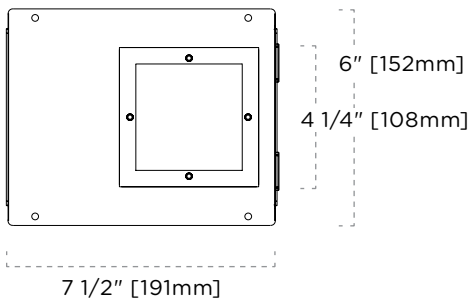

CONCRETE POUR

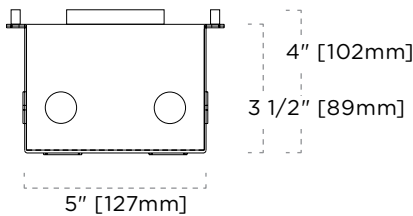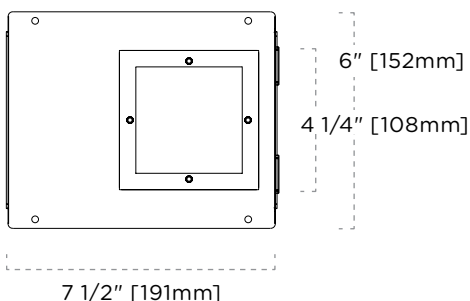

Wall Lights

2-076 | Standard LED

5W Wall Light Enclosure



TAG TYPE



ORDER FORM

1	2	3	4

1. HOUSING

2-076 Wall Light Enclosure

2. HOUSING TYPES

WL Non-Insulated & Insulated

WL-CH Concrete Housing

3. VOLTAGE

120¹

4. DIMMING

3S ELV Dimming (10%)

RT Remote Driver ²

NOTES

1 120 Voltage is supplied with an integral non-dimming driver.

2 RT remote driver requires selection from compatible driver listings.