

# Legacy Housings

2-105 | Incandescent

## Square Concrete Pour

### FEATURES

- Rated for concrete applications
- 14"-25" adjustable hanger bars
- 20 Ga. cold rolled steel baseplate
- 18 Ga. galvanized steel junction box
- 5 junction box knock outs
- Hinged lid
- Optional 2 1/2" extension collar for drop ceiling construction (i.e. "Z" rail or drywall)
- MR16 porcelain Bi Pin socket type GX5.3
- MR16 low voltage (12V) lamp sold separately
- GU10 line voltage (120V) lamp sold separately
- Approved for branch circuit wiring

### CEILING CUTOUT

Ø 4 1/2" [115mm]


### PERFORMANCE SUMMARY

Lamp	Series	Input Voltage		
		120V	277V	347V
		Maximum Wattage		
MR16	Magnetic Transformer	75W	75W	75W
MR16	Electronic Transformer	75W	75W	—
MR16	E15 Electronic Transformer	15W	15W	—
GU10	GU10 Halogen Lamp	50W	—	—
GU10	GU10 LED Lamp	15W	—	—

### CERTIFICATIONS



### DIMENSIONS—INSULATED & CONCRETE POUR

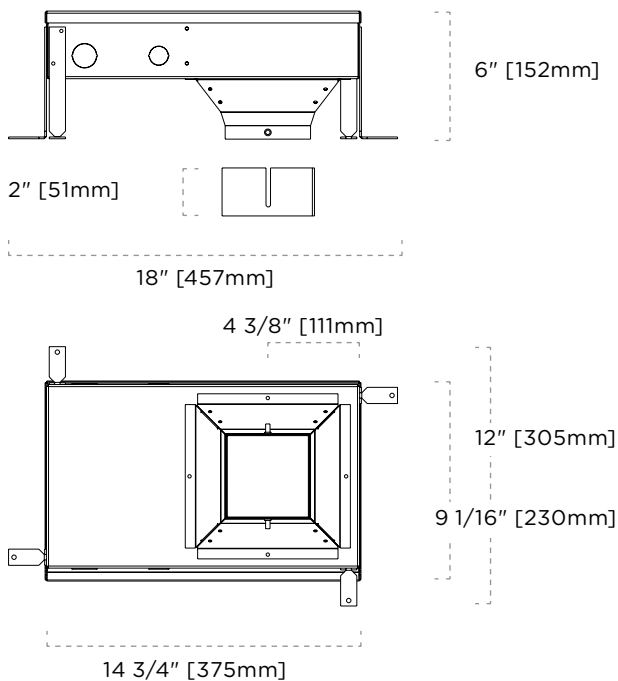

# Legacy Housings

2-105 | Incandescent

## Square Concrete Pour



### TAG TYPE

--

### ORDER FORM

1	2	3	4	5

#### 1. HOUSING

**2-105** Square

#### 2. HOUSING TYPE

**CH-Q** Concrete Pour

#### 3. TRANSFORMER

**E** MR16 Electronic Transformer  
(Halogen Lamp)

**E15** MR16 Electronic Transformer  
(Halogen Replacement Lamp)<sup>1</sup>

**M** MR16 Magnetic Transformer

**GU10-HAL** GU10 Halogen Lamp

**GU10-LED** GU10 LED<sup>2</sup>

#### 4. VOLTAGE

**120**

**277**

**347**<sup>3</sup>

#### 5. OPTIONS

**BP** Black Painted Interior

**EC2-Q** 2 1/2" Extension Collar

**WP** White Painted Interior

#### NOTES

**1** E15 transformer option is compatible with select Sora lamps. Check Sora compatibility charts for transformer voltage, lamp wattage, dimming and enclosed fixture restrictions.

**2** GU10-LED is compatible with GU10 LED lamp, rated for a maximum 15W, sold separately.

**3** 347 voltage is only available with M magnetic transformer.