




DIMENSIONS

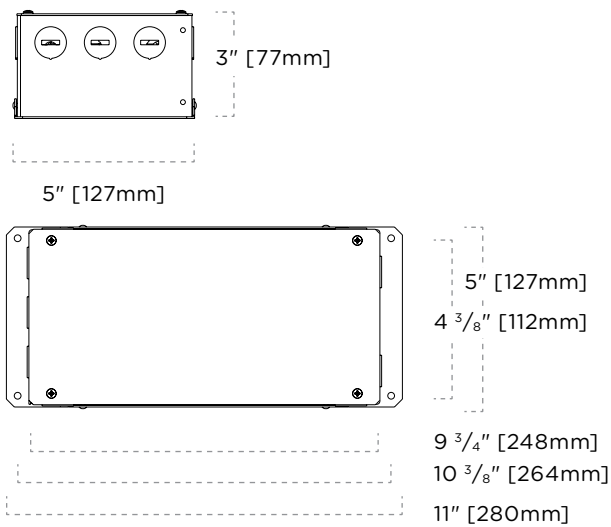

Drivers


D2CH-DIM | Standard LED

2 Channel Driver

FEATURES

- 0-10V
- Dimmable 100-1%
- 350mA constant current output per channel
- 120V @ 50/60Hz input, 0.40A maximum
- 277V @ 50/60Hz input, 0.18A maximum
- 1-57V DC output per channel
(see compatible trims for approved loading)
- 90% efficiency at full load
- Power factor of >0.94
- Driver and enclosure UL approved as Class 2
- FCC Class B, EN55015, EN55022
- 50°C maximum ambient temperature
- Overload, underload, short circuit, and over temperature protection
- Single 0-10V dimming channel controls all output channels

SERIES WIRING



WIRING SETUP


120-277 Volts
AC Input

SERIES WIRING NOTE

All LEDs must be wired in series. Failure to do so will cause immediate LED failure and void warranty.

WIRING NOTE

Ensure that power is switched off before connecting or hardwiring the LED product. Failure to do so will cause immediate LED failure

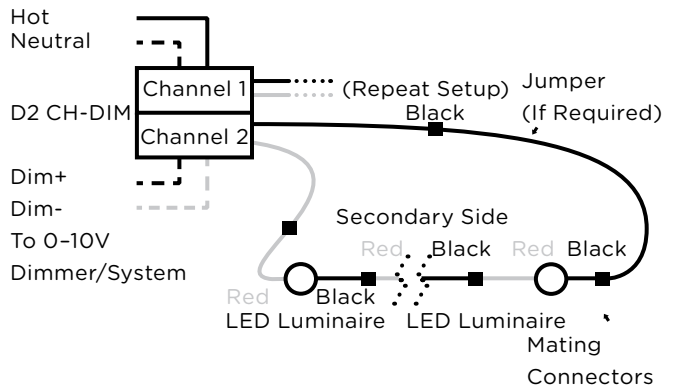

Drivers

D2CH-DIM | Standard LED

2 Channel Driver



TAG TYPE

| |
|--|
| |
|--|

ORDER FORM

| 1 | 2 |
|---|---|
| | |

1. DRIVER

D2CH-DIM 2 Channel LED Driver

2. VOLTAGE


120

277


COMPATIBLE TRIMS

1W TRIMS


511
1W Cabinet Light
Min. Load Units: 1
Max. Load Units: 16/Ch




2-220
Mini Turno
Min. Load Units: 1
Max. Load Units: 16/Ch



2-315
315 Wall Light
Min. Load Units: 1
Max. Load Units: 16/Ch




3-610
Compact Square
Min. Load Units: 1
Max. Load Units: 16/Ch




2W TRIM


2-230
Mini Aurora
Min. Load Units: 1
Max. Load Units: 16/Ch




2-305
305 Wall Light
Min. Load Units: 1
Max. Load Units: 16/Ch



3-600
Compact Round
Min. Load Units: 1
Max. Load Units: 16/Ch




3-620
Compact Eyelid
Min. Load Units: 1
Max. Load Units: 16/Ch




4W TRIM

515
4W Cabinet Light
Min. Load Units: 1
Max. Load Units: 5/Ch




5W TRIM


3-630
Draco
Min. Load Units: 1
Max. Load Units: 4/Ch




3-645
Square Vela
Min. Load Units: 1
Max. Load Units: 2



2-400
SS Wall Light
Min. Load Units: 1
Max. Load Units: 4/Ch



3-640
Vela
Min. Load Units: 1
Max. Load Units: 4/Ch



CERTIFICATIONS

