

# Guardian™

D4B-FVR-S | Standard LED


## Square Non-Insulated

Our tamper-resistant downlight, Guardian™, is ideal for hospitals, correctional facilities, schools or anywhere security is a concern. This sturdy yet beautiful fixture is available in a wide array of luminance choices and beam spreads. So, if you're looking for an affordable downlight that will help keep patients safe, we've got just the prescription.


### FEATURES

- Rated for non-insulated ceilings to a max ambient temperature of 45°C [113°F] with 3, 5 series
- Rated for non-insulated ceilings to a max ambient temperature of 40°C [104°F] with 7, 9 series
- Bi-directional mounting
- 14"-25" adjustable hanger bars
- 18 Ga. galvanized steel junction box with multiple KO
- 20 Ga. black powder coated steel baseplate


### CEILING CUTOUT




### CERTIFICATIONS

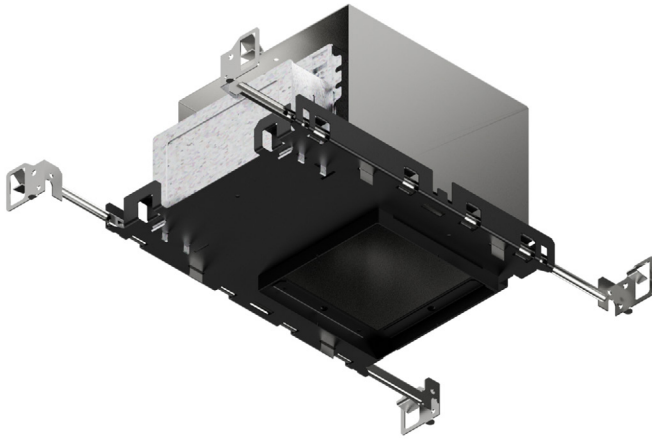

### DIMENSIONS—TRIMMED + APERTURE COLLAR (3, 5 SERIES)

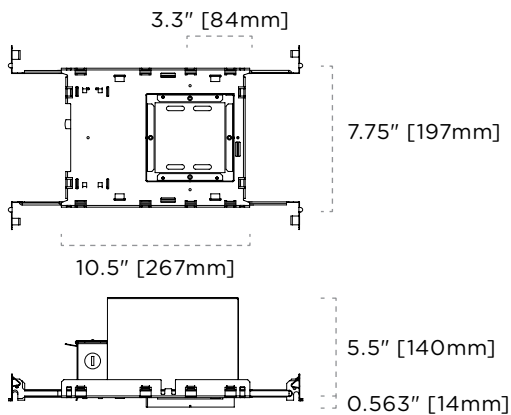

### DIMENSIONS—TRIMMED + APERTURE COLLAR (7, 9 SERIES)

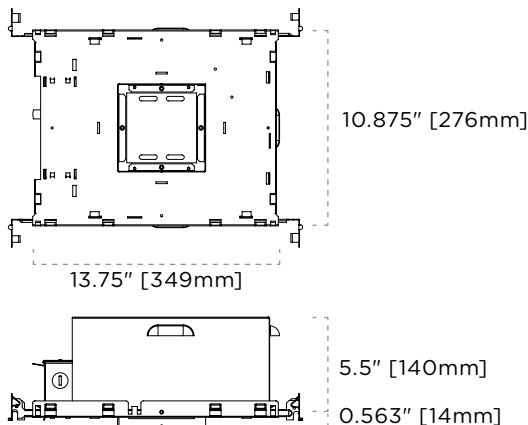



D4B-FVR-S | Standard LED

# Square Non-Insulated



## TAG TYPE

Blank area for tag type information.

## ORDER FORM

1	2	3	4	5	6

### 1. HOUSING

**D4B-FVR-S**

### 2. FLANGE TYPE<sup>1</sup>

**T** Trimmed

### 3. SERIES<sup>1</sup>

- 3** BRO 1400 Lumens Max.
- 5** BRO 1800 Lumens Max.
- 7** BRO 2300 Lumens Max.
- 9** BRO 3000 Lumens Max.

### 4. DIMMING

- D** DALI (1%)
- LE** Lutron Phase (1%)<sup>2</sup>
- LH** Lutron EcoSystem (1%)
- P** 0-10V Dimming (1%)
- P1** eldoLED Dimming (1%)
- S** Phase Dimming (5%)

### 5. VOLTAGE

- 120**
- 277**
- 347**<sup>3</sup>

### 6. OPTIONS

- BP** Black Painted Interior
- WP** White Painted Interior

### NOTES

- 1** Ensure trim compatibility prior to housing order. Conditions may apply.
- 2** LE and S dimming is only available in 120V.
- 3** 347V is only available in P dimming.