



Legacy Housings


D4B-IC1VR-S | Standard LED

Square Insulated Airtight Type 1 Vandal Resistant

FEATURES


- Rated for insulation contact
- Airtight in accordance with ASTM E283
- Maximum ambient temperature of 40°C (104°F)
- 5 junction box knock outs
- Bi-directional mounting
- 14"-25" adjustable hanger bars
- 18 Ga. galvanized steel junction box with multiple KO
- 20 Ga. black powder coated steel baseplate

CEILING CUTOUT—TRIMMED




DIMENSIONS—TRIMMED + APERTURE COLLAR

10.5" [267mm]

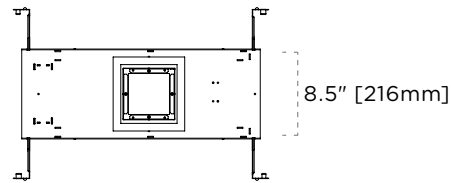

22 1/2" [572mm]




CERTIFICATIONS



Legacy Housings

D4B-IC1VR-S | Standard LED



Square Insulated Airtight Type 1 Vandal Resistant

TAG TYPE

--	--	--	--	--	--

ORDER FORM

1	2	3	4	5	6

1. HOUSING

D4B-IC1VR-S

2. FLANGE TYPE¹

T Trimmed

3. SERIES¹

3 BRO, 1000 Lumens Max

5 BRO, 1800 Lumens Max

4. DIMMING

D DALI (1%)

LE Lutron Phase (1%)⁴

LH Lutron EcoSystem (1%)

P 0-10V Dimming (1%)

P1 eldoLED Dimming (1%)

S Phase Dimming (5%)⁴

5. VOLTAGE

120

277

347⁵

6. OPTIONS

BP Black Painted Interior

WP White Painted Interior

NOTES

1 Ensure trim compatibility prior to housing order. Conditions may apply.

2 S and LE dimming is only available in 120V.

3 347V is only available in P dimming.