

# Legacy Housings


D4X-CP-R | Premium LED

## Round Chicago Plenum


### FEATURES

- Rated for non insulated ceilings to a max ambient temperature of 45°C (113°F)
- In accordance with CCEA (City of Chicago Environmental Air), Chicago electrical code section 18-27-300.22©
- 5 junction box knock outs
- Bi-directional mounting
- 14"-25" adjustable hanger bars
- 18 Ga. galvanized steel junction box with multiple KO
- 20 Ga. black powder coated steel baseplate

### CEILING CUTOUT—TRIMMED & TRIMLESS



### CEILING CUTOUT—WOOD TRIMLESS




### LISTINGS




CCEA  
Approved

### DIMENSIONS—TRIM

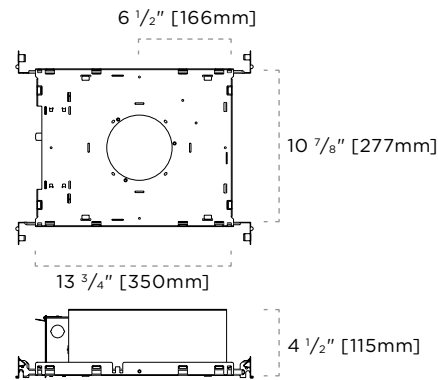

### DIMENSIONS—TRIMMED + APERTURE COLLAR

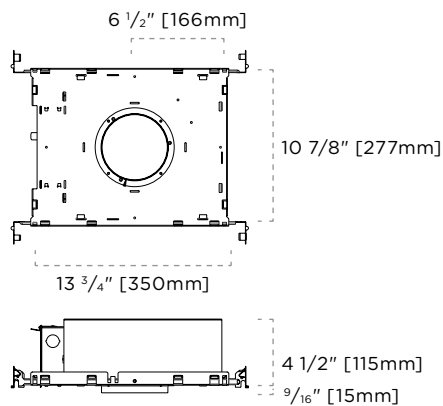


### CERTIFICATIONS



# Legacy Housings

D4X-CP-R | Standard LED

## Round Chicago Plenum



### TAG TYPE

--	--	--	--	--	--

### ORDER FORM

1	2	3	4	5	6

#### 1. HOUSING

**D4X-CP-R**

#### 2. FLANGE TYPE<sup>1</sup>

**T** Trimmed

#### 3. SERIES<sup>1</sup>

**3** XTM 1000 Lumens Max

**5** XTM 1500 Lumens Max

#### 4. DIMMING

**D** DALI (1%)

**LE** Lutron Phase (1%)<sup>2</sup>

**LH** Lutron EcoSystem (1%)

**P** 0-10V Dimming (1%)

**P1** eldoLED Dimming (1%)

**S** Phase Dimming (5%)<sup>3</sup>

#### 5. VOLTAGE

**120**

**277**

#### 6. OPTIONS

**BP** Black Painted Interior

**RCF** Round Aperture Collar

**WP** White Painted Interior

#### NOTES

**1** Ensure trim compatibility prior to housing order. Conditions may apply.

**2** LE dimming is only compatible with 120V.

**3** S dimming is non-dimming when paired with 277V.