

# Legacy Housings


D4X-FD-R | Premium LED

## Round Deep Non-Insulated


### FEATURES

- Rated for non insulated ceilings to a max ambient temperature of 45°C (113°F)
- 5 junction box knock outs
- Bi-directional mounting
- 14"-25" adjustable hanger bars
- 18 Ga. galvanized steel junction box with multiple KO
- 20 Ga. black powder coated steel baseplate

### CEILING CUTOUT—TRIMMED & TRIMLESS





### CEILING CUTOUT—WOOD TRIMLESS





### CERTIFICATIONS



### DIMENSIONS—3, 5 SERIES

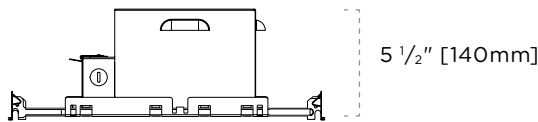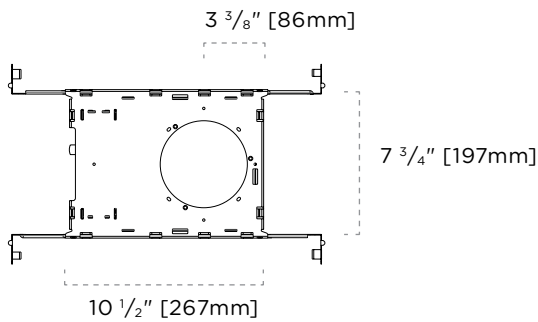


### DIMENSIONS—7, 9 SERIES

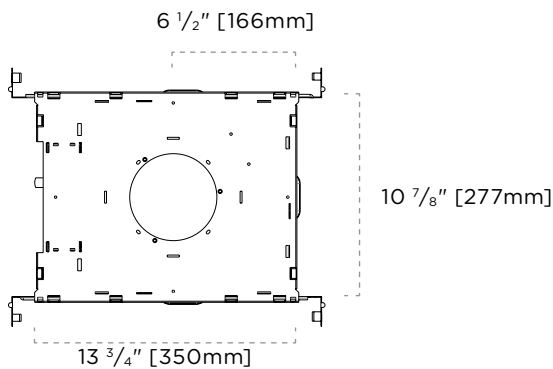

# Legacy Housings

D4X-FD-R | Premium LED



## Round Deep Non-Insulated

### TAG TYPE

--	--	--	--	--	--

### ORDER FORM

1	2	3	4	5	6

#### 1. HOUSING

**D4X-FD-R**

#### 2. FLANGE TYPE<sup>1</sup>

**T** Trimmed

**TL** Trimless

**TLW-XX** Trimless Wood Ceiling<sup>2,3</sup>

#### 3. SERIES

**3** XTM 1000 Lumens Max

**5** XTM 1500 Lumens Max

**7** XTM 2000 Lumens Max

**9** XTM 2800 Lumens Max

#### 4. DIMMING

**D** DALI (1%)

**LE** Lutron Phase (1%)<sup>4</sup>

**LH** Lutron EcoSystem (1%)

**P** 0-10V Dimming (1%)

**P1** eldoLED Dimming (1%)

**S** Phase Dimming (5%)<sup>5</sup>

#### 5. VOLTAGE

**120**

**277**

**347**<sup>6</sup>

#### 6. OPTIONS

**BP** Black Painted Interior

**RCF** Round Aperture Collar<sup>7</sup>

**WP** White Painted Interior

#### NOTES

**1** Ensure trim compatibility prior to housing order. Conditions may apply.

**2** TLW-XX wood trimless flange type is matched to trim finish. XX refers to trim finish code and must be specified at time of order. See trim spec sheet for color availability.

**3** TLW-XX wood trimless ceiling thickness to be specified at time of order. Requires consultation with lighthouse sales personnel.

**4** LE dimming is only available in 120V.


**5** S dimming with 277V is non-dimming.

**6** 347V is only available in P dimming.


**7** RCF option is not compatible with TLW-XX wood trimless ceiling.

## DIMENSIONS


### TRIMMED (3, 5 SERIES)

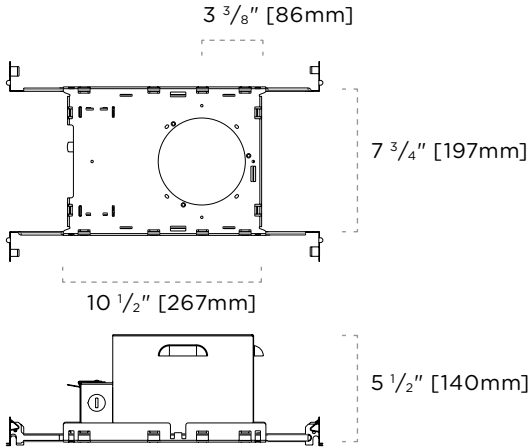


### TRIMMED (7, 9 SERIES)

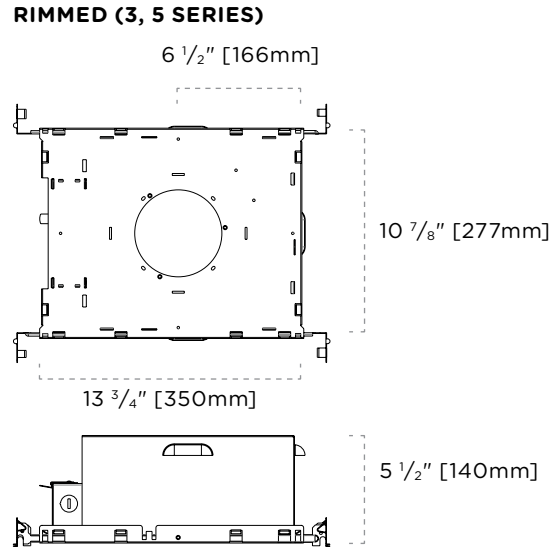


### TRIMMED + APERTURE COLLAR (3, 5 SERIES)

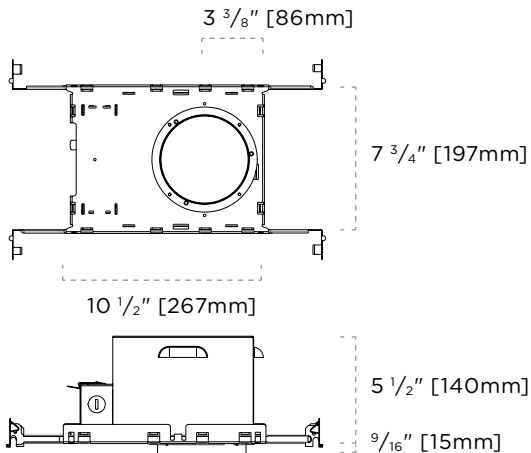

### TRIMMED + APERTURE COLLAR (7, 9 SERIES)

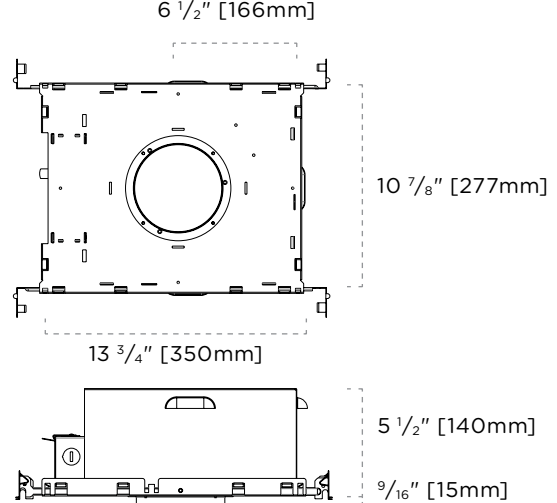

### TRIMLESS (3, 5 SERIES)

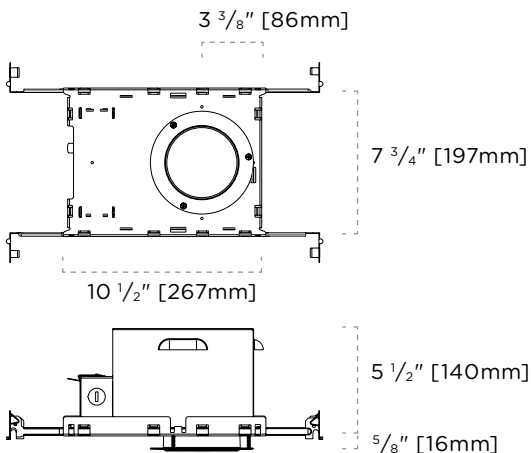

### WOOD TRIMLESS (3, 5 SERIES)

