

Guardian™

D4X-FVR-R | Premium LED


Round Non-Insulated

Our tamper-resistant downlight, Guardian™, is ideal for hospitals, correctional facilities, schools or anywhere security is a concern. This sturdy yet beautiful fixture is available in a wide array of luminance choices and beam spreads. So, if you're looking for an affordable downlight that will help keep patients safe, we've got just the prescription.

FEATURES

- Rated for non-insulated ceilings to a max ambient temperature of 45°C [113°F] with 3, 5 series
- Rated for non-insulated ceilings to a max ambient temperature of 40°C [104°F] with 7, 9 series
- Bi-directional mounting
- 14"-25" adjustable hanger bars
- 18 Ga. galvanized steel junction box with multiple KO
- 20 Ga. black powder coated steel baseplate


CEILING CUTOUT




CERTIFICATIONS



DIMENSIONS—TRIMMED + APERTURE COLLAR (3, 5 SERIES)

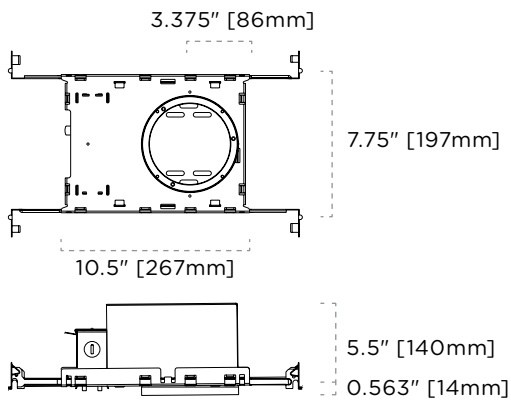

DIMENSIONS—TRIMMED + APERTURE COLLAR (7, 9 SERIES)

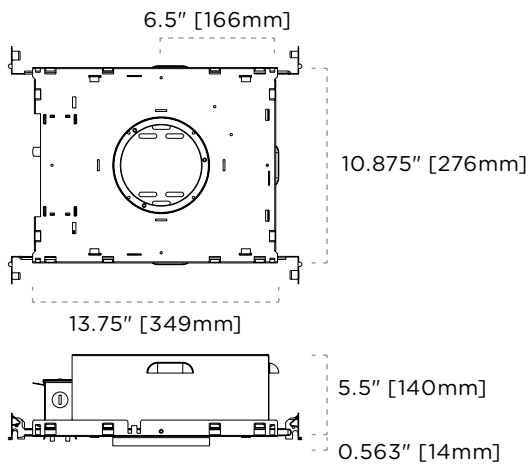



D4X-FVR-R | Premium LED

Round Non-Insulated



TAG TYPE

Blank area for tag type specification.

ORDER FORM

1	2	3	4	5	6

1. HOUSING

D4X-FVR-R

2. FLANGE TYPE¹

T Trimmed

3. SERIES¹

- 3** XTM 1000 Lumens Max
- 5** XTM 1500 Lumens Max
- 7** XTM 2000 Lumens Max
- 9** XTM 2700 Lumens Max

4. DIMMING

- D** DALI (1%)
- LE** Lutron Phase (1%)²
- LH** Lutron EcoSystem (1%)
- P** 0-10V Dimming (1%)
- P1** eldoLED Dimming (1%)
- S** Phase Dimming (5%)³

5. VOLTAGE

- 120**
- 277**
- 347**⁴

6. OPTIONS

- BP** Black Painted Interior
- WP** White Painted Interior

NOTES

- 1** Ensure trim compatibility prior to housing order. Conditions may apply.
- 2** LE dimming is only available in 120V.
- 3** S dimming with 277V is non-dimming.
- 4** 347V is only available in P dimming.