

# Contortionist™


L4B-F-R | Standard LED

## Round Non-Insulated


### FEATURES

- Rated for non insulated ceilings to a max ambient temperature of 45°C (113°F)
- Fixed and adjustable recessed housings
- Hot Aiming and locking capabilities (adjustable housing)
- 40° tilt with minimal light loss (adjustable housing)
- 360° rotation (adjustable housing)
- Bi-directional mounting
- 14"-25" adjustable hanger bars
- 18 Ga. galvanized steel junction box with multiple KO
- 20 Ga. black powder coated steel baseplate


### CEILING CUTOUT—TRIMMED & TRIMLESS




### CEILING CUTOUT—WOOD TRIMLESS




### DIMENSIONS—TRIMMED ADJUSTABLE

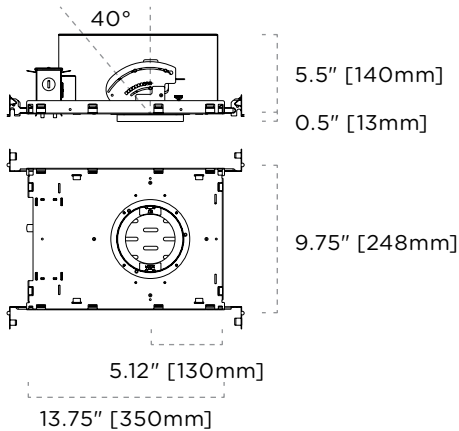


### DIMENSIONS—TRIMMED FIXED

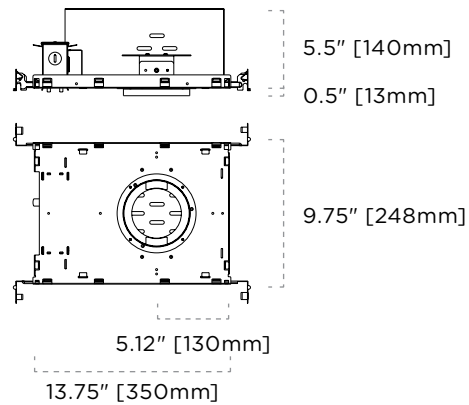

### DIMENSIONS—TRIMLESS ADJUSTABLE

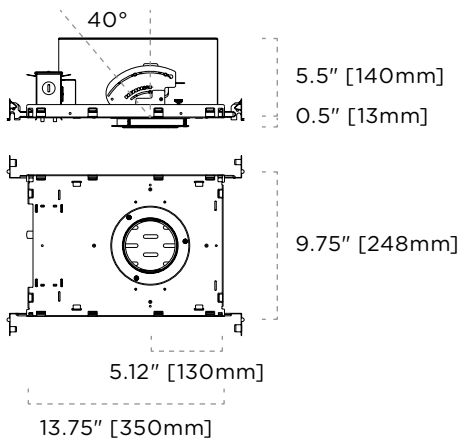


### DIMENSIONS—TRIMLESS FIXED

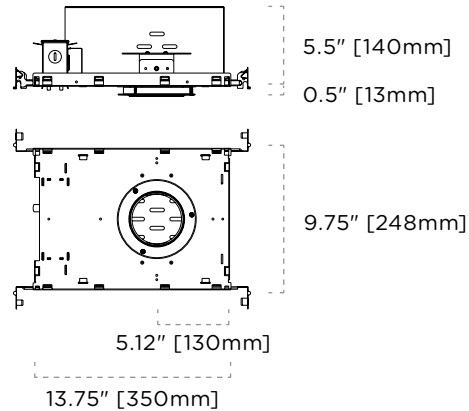

# Contortionist™

L4B-F-R | Standard LED

## Round Non-Insulated



### TAG TYPE

--	--	--	--	--	--	--

### ORDER FORM

1	2	3	4	5	6	7

#### 1. HOUSING

**L4B-F** Non-Insulated

#### 2. TRIM TYPE<sup>1</sup>

**RA** Round Adjustable

**RF** Round Fixed

#### 3. FLANGE TYPE

**T** Trimmed

**TL** Trimless

#### 4. SERIES

**3** 1000lm Max.

**5** 1800lm Max.

**7** 2300lm Max.

#### 5. DIMMING

**D** DALI (1%)

**LE** Lutron Phase (1%)<sup>2</sup>

**LH** Lutron EcoSystem (1%)

**P** 0-10V Dimming (1%)

**P1** eldoLED Dimming (1%)

**S** Phase Dimming (5%)<sup>3</sup>

#### 6. VOLTAGE

**120** 120V

**277** 277V

**347** 347V<sup>4</sup>

#### 7. OPTIONS

**BP** Black Painted Interior

**WP** White Painted Interior

#### NOTES

**1** Refer to trim specification sheets for compatible trim types.

**2** LE dimming is only available in 120V.

**3** S dimming is only available in 120V.

**4** 347V is only available with P dimming.

### CERTIFICATIONS

