

# Contortionist™

L4X-CP-S | Premium LED

## Square Chicago Plenum

### FEATURES


- Rated for non insulated ceilings to a max ambient temperature of 45°C (113°F)
- In accordance with CCEA (City of Chicago Environmental Air), Chicago electrical code section 18-27-300.22©
- Fixed and adjustable recessed housings
- Hot Aiming and locking capabilities (adjustable housing)
- 40° tilt with minimal light loss (adjustable housing)
- 360° rotation (adjustable housing)
- Bi-directional mounting
- 14"-25" adjustable hanger bars
- 18 Ga. galvanized steel junction box with multiple KO
- 20 Ga. black powder coated steel baseplate

### LISTINGS




CCEA  
Approved


### DIMENSIONS—TRIMMED ADJUSTABLE

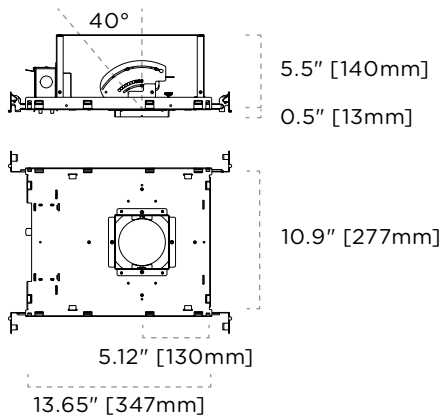


### DIMENSIONS—TRIMLESS ADJUSTABLE

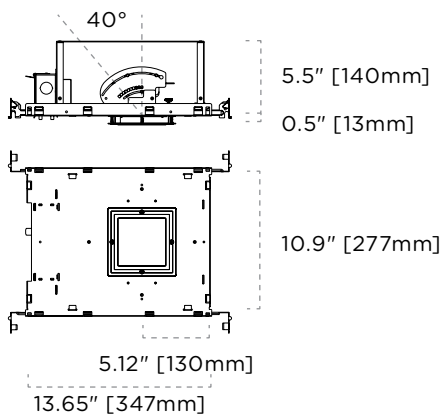


### CEILING CUTOUT



### DIMENSIONS—TRIMMED FIXED

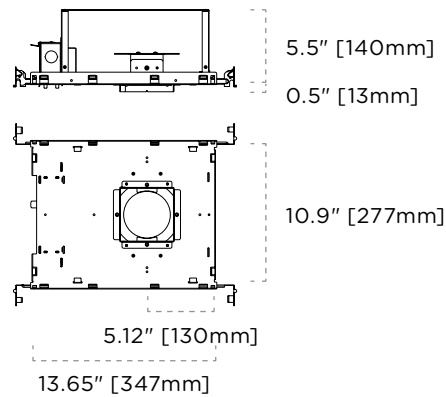


### DIMENSIONS—TRIMLESS FIXED

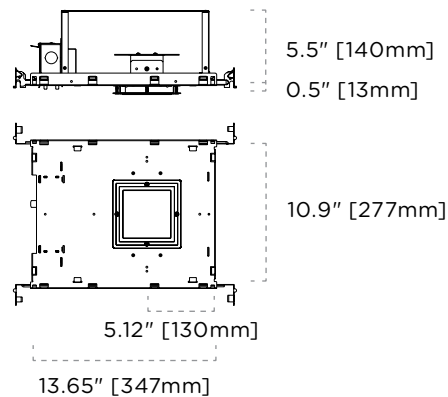

# Contortionist™

L4X-CP-S | Premium LED

## Square Chicago Plenum



### TAG TYPE



### ORDER FORM

1	2	3	4	5	6	7

#### 1. HOUSING

**L4X-CP** Chicago Plenum

#### 2. TRIM TYPE <sup>1</sup>

**SA** Square Adjustable

**SF** Square Fixed

#### 3. FLANGE TYPE

**T** Trimmed

**TL** Trimless

#### 4. SERIES

**3** 1000lm Max.

**5** 1500lm Max.

#### 5. DIMMING

**D** DALI (1%)

**LE** Lutron Phase (1%) <sup>2</sup>

**LH** Lutron EcoSystem (1%)

**P** 0-10V Dimming (1%)

**P1** eldoLED Dimming (1%)

**S** Phase Dimming (5%) <sup>3</sup>

#### 6. VOLTAGE

**120** 120V

**277** 277V

#### 7. OPTIONS

**BP** Black Painted Interior

**WP** White Painted Interior

#### NOTES

**1** Refer to trim specification sheets for compatible trim types.

**2** LE dimming is only available with 120V.

**3** S dimming with 277V is non-dimmable.

### CERTIFICATIONS



L4X-CP-S-Specs p. 2/2

Product specifications and dimensions are subject to change without notice

All rights reserved. © 2020 Lighthouse Lighting Ltd. Rev 2020.06.22

info@lighthouse lighting.com P. 604.464.5644 T. 1.800.464.9544

LIGHTHEADED™