



# Legacy Downlights

2-115-T | Health LED

## Aqua

The small-aperture Aqua brings surprising performance and excellent glare control to wet locations. The fixture is a die cast trim which offers performance, versatility and excellent glare control. The Aqua trim features a silicone sealed glass lens. The BIOS® SkyBlue Dynamic Spectrum lighting provides full daytime circadian stimulus, communicating directly with human circadian biology.

### LISTINGS




Wet  
Location




BIOS® SkyBlue  
Dynamic Spectrum

### DIMENSIONS—3 SERIES

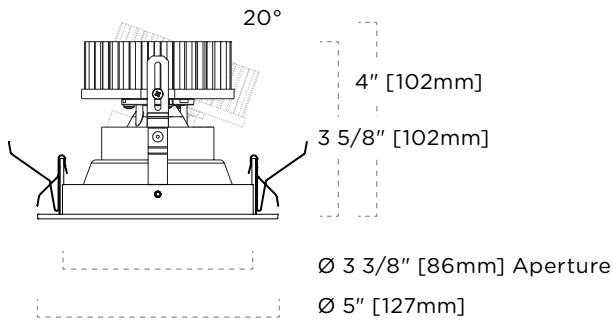

### DIMENSIONS—5 & 7 SERIES

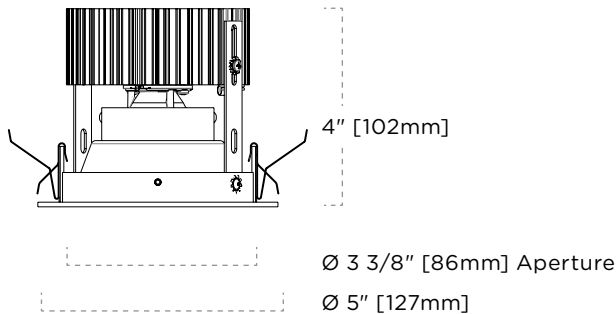

### FEATURES

- Wet location listed
- Ø 3 3/8" [86mm] Aperture
- 20° vertical tilt
- Silicone sealed glass lens
- Diffusion media standard with warm dimming
- Accepts up to 2 media
- Dimming from High M/P LED Spectrum @ 3500K to Low M/P LED Spectrum @ 3000K
- Die-cast aluminum fixture
- Powder coated and plated trim ring finishes
- Trim clips designed for 5/8" ceiling thickness

### PERFORMANCE SUMMARY

Color Rendering (CRI)	83
Lumen Series	3
Source Lumens	1000
LED Wattage	12
Lumen Series	5
Source Lumens	1800
LED Wattage	17
Lumen Series	7
Source Lumens	2300
LED Wattage	24

# Legacy Downlights

2-115-T | Health LED



## Aqua

### TAG TYPE

--	--	--	--	--	--	--	--

### ORDER FORM

1	2	3	4	5	6	7	8

#### 1. TRIM

**2-115-T** Aqua

#### 2. FLANGE FINISH

- 01** White
- 02** Chrome Plated
- 04** Black
- 05** Matte Silver
- 06** Bronze
- 11** Matte Nickel
- CC** Custom Color<sup>1</sup>

#### 3. GLASS

- C** Clear Glass<sup>2</sup>
- F** Frosted Glass<sup>3</sup>

#### 4. MODULE & BEAM SPREAD

- BDY20** 20° Beam, BIOS-DY Dynamic Module
- BDY28** 28° Beam, BIOS-DY Dynamic Module
- BDY40** 40° Beam, BIOS-DY Dynamic Module

#### 5. COLOR TEMPERATURE

**35** 3500K

#### 6. CRI, LUMENS, SERIES

- 8310** 83 CRI, 1000lm, 3 Series
- 8318** 83 CRI, 1800lm, 5 Series
- 8323** 83 CRI, 2300lm, 7 Series

#### 7. OPTIONAL MEDIA (2 MAXIMUM)

- EL** Elongating
- FRO** Frosted
- HC** Honeycomb
- PER** Perimeter Frosted
- SL** Solite Softening
- SPDL** Spread

#### 8. OPTIONS

- EXT** Extension Clips (Maximum 2")

#### NOTES

- 1** CC custom color requires consultation with Lightheaded sales personnel.
- 2** C clear glass reflector color is painted to match trim finish.
- 3** F frosted glass requires all reflectors painted white.

## SPECIFICATIONS


### FLANGE FINISHES

-  White
-  Chrome Plated
-  Black
-  Matte Silver
-  Bronze
-  Gold Plated
-  Matte Nickel

### GLASS LENS

-  Frosted
-  Clear

### COLOR TEMPERATURES

-  3500K


### BEAM SPREADS




### COMPATIBLE HOUSINGS

#### NON-INSULATED/FRAME IN


D4BDY-F-R  
3, 5 Series  
L 10.5" W 7.75" H 4.5"  
L 267mm W 197mm H 115mm



D4BDY-F-R  
7 Series  
L 13.75" W 10.875" H 4.5"  
L 350mm W 277mm H 115mm




### DYNAMIC SPECTRAL POWER DISTRIBUTION

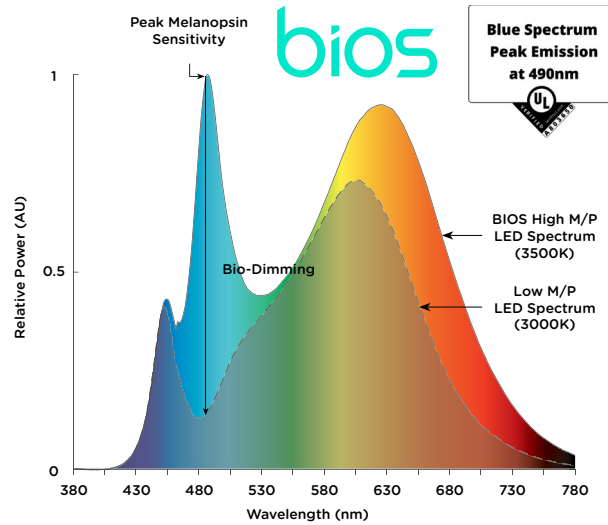

#### INSULATED AIRTIGHT

D4BDY-IC1A-R  
3 Series  
L 22.5" W 8.5" H 5.875"  
L 572mm W 216mm H 150mm



### CERTIFICATIONS

