



Legacy Downlights

2-120-T | Health LED

Aurora

Our Aurora luminaire features a 2 1/2" regressed LED module and are optics ready for glare free downlighting. The BIOS® SkyBlue Dynamic Spectrum lighting provides full daytime circadian stimulus, communicating directly with human circadian biology.

FEATURES

- Damp location listed
- Ø 3 1/2" [89mm] Aperture
- 20° vertical tilt
- Clear media standard
- Accepts up to 2 media
- Dimming from High M/P LED Spectrum @ 3500K to Low M/P LED Spectrum @ 3000K
- Die-cast aluminum fixture
- Powder coated and plated trim ring finishes
- Trim clips designed for 5/8" ceiling thickness

PERFORMANCE SUMMARY


Color Rendering (CRI)	83
Lumen Series	3
Source Lumens	1000
LED Wattage	12
Lumen Series	5
Source Lumens	1800
LED Wattage	17
Lumen Series	7
Source Lumens	2300
LED Wattage	24

LISTINGS




BIOS® SkyBlue
Dynamic Spectrum

DIMENSIONS—3 SERIES

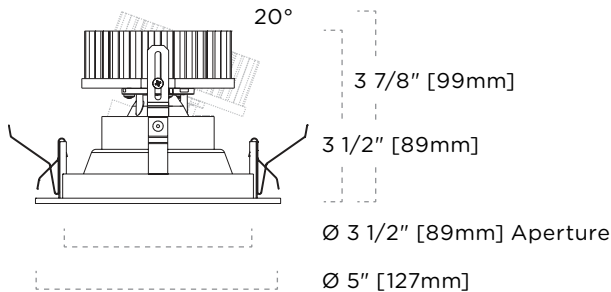

DIMENSIONS—5 & 7 SERIES

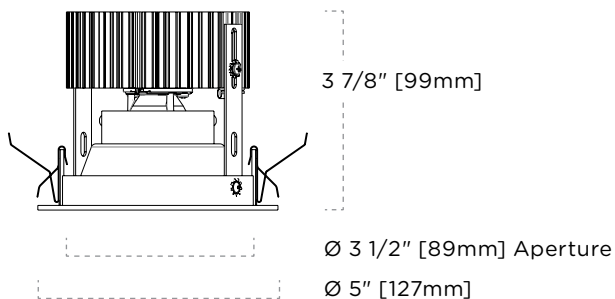

Legacy Downlights

2-120-T | Health LED



Aurora

TAG TYPE



ORDER FORM

1	2	3	4	5	6	7	8

1. TRIM

2-120-T Aurora

2. FLANGE FINISH

- 01** White
- 02** Chrome Plated
- 04** Black
- 05** Matte Silver
- 06** Bronze
- 09** Gold Plated
- 11** Matte Nickel
- CC** Custom Color¹

3. REFLECTOR FINISH

- BA** Black Specular
- BLO** Black Open
- BLS** Black Stepped
- NICS** Nickel Satin
- SAS** Satin Silver
- WHO** White Open

4. MODULE & BEAM SPREAD

- BDY20** 20° Beam, BIOS-DY Dynamic Module
- BDY28** 28° Beam, BIOS-DY Dynamic Module
- BDY40** 40° Beam, BIOS-DY Dynamic Module

5. COLOR TEMPERATURE

35 3500K

6. CRI, LUMENS, SERIES

- 8310** 83 CRI, 1000lm, 3 Series
- 8318** 83 CRI, 1800lm, 5 Series
- 8323** 83 CRI, 2300lm, 7 Series

7. OPTIONAL MEDIA (2 MAXIMUM)

- EL** Elongating
- FRO** Frosted
- HC** Honeycomb
- PER** Perimeter Frosted
- SL** Solite Softening
- SPDL** Spread

8. OPTIONS

EXT Extension Clips (Maximum 2")

NOTES







1 CC custom color requires consultation with Lightheaded sales personnel.

SPECIFICATIONS


FLANGE FINISHES

-  White
-  Chrome Plated
-  Black
-  Matte Silver
-  Bronze
-  Gold Plated
-  Matte Nickel

REFLECTOR FINISHES

-  Black Open
-  Black Specular
-  Black Stepped Baffle
-  Nickel Satin
-  Silver Satin
-  White Open

COLOR TEMPERATURES

-  3500K


BEAM SPREADS




COMPATIBLE HOUSINGS

NON-INSULATED/FRAME IN


D4BDY-F-R
3, 5 Series
L 10.5" W 7.75" H 4.5"
L 267mm W 197mm H 115mm



D4BDY-F-R
7 Series
L 13.75" W 10.875" H 4.5"
L 350mm W 277mm H 115mm




DYNAMIC SPECTRAL POWER DISTRIBUTION

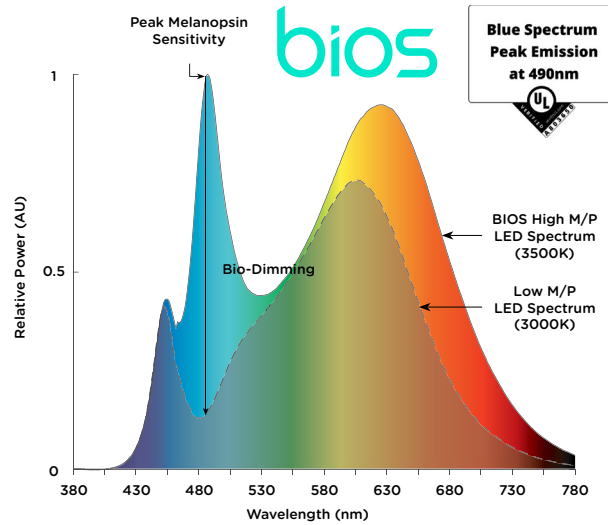

INSULATED AIRTIGHT

D4BDY-IC1A-R
3 Series
L 22.5" W 8.5" H 5.875"
L 572mm W 216mm H 150mm



CERTIFICATIONS

