



Accents & Millwork

3-620 | Standard LED

Compact Eyelid

Compact recessed lights are ultra-bright for their diminutive size. The single LED source allows mounting close to the subject, highlighting small art pieces or memorabilia with virtually no infrared or damaging ultraviolet light in the beam spread. The fixture mounts horizontally in niches and millwork.


FEATURES

- Utilizes low watt LED
- Damp location listed
- Ø 1 5/8" [41mm] Aperture
- Machined aluminum
- Powder coated and plated trim ring finishes
- Trim clips designed for 5/8" ceiling thickness
- Powered by a remote 350mA constant current driver (sold separately)
- L70 @ 50,000 hours


PERFORMANCE SUMMARY

L70 Estimate (h)	50,000
Color Rendering (CRI)	80
Source Lumens	155
LED Wattage	1

CEILING CUTOUT



DIMENSIONS

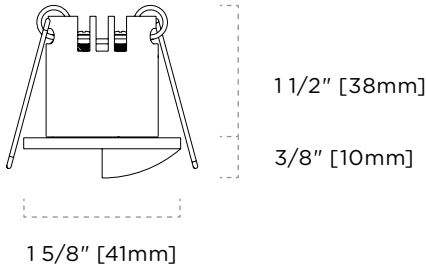


FLANGE FINISHES

- White
- Chrome Plated
- Black
- Matte Silver
- Bronze
- Matte Nickel

COLOR TEMPERATURES

- 2700K
- 3000K
- 4000K

BEAM SPREADS



Accents & Millwork

3-620 | Standard LED

Compact Eyelid



TAG TYPE

ORDER FORM

1	2	3	4

1. TRIM

3-620 Compact Eyelid

2. FLANGE FINISH

- 01** White
- 02** Chrome Plated
- 04** Black
- 05** Matte Silver
- 06** Bronze
- 11** Matte Nickel

3. LED MODULE & BEAM

LED22 22° Beam

4. COLOR TEMPERATURE

- 27** 2700K
- 30** 3000K
- 40** 4000K

COMPATIBLE DRIVERS

0-10V DIMMING

SMOOTH, FLICKER-FREE DIMMING FROM 100% TO 10%.


D1CH-DIM

Channels: 1 Voltage: 120/277
Min. Load Units: 5
Max. Load Units: 11




D2CH-DIM

Channels: 2 Voltage: 120/277
Min. Load Units: 1
Max. Load Units: 16/Ch



D4CH-DIM

Channels: 4 Voltage: 120/277
Min. Load Units: 2
Max. Load Units: 16/Ch




ELECTRONIC LOW VOLTAGE (ELV)

SMOOTH, FLICKER-FREE DIMMING FROM 100% TO 20%.


D10W-DIM

Channels: 1 Voltage: 120
Min. Load Units: 2
Max. Load Units: 9



D15W-DIM

Channels: 1 Voltage: 120
Min. Load Units: 9
Max. Load Units: 13



CERTIFICATIONS

