

Contortionist™

4-114-T | Premium LED

Round Wall Wash

Our Contortionist™ series of hot adjustables twist & turn in ways you'll need to see to believe. These dual axis marvels of flexibility can tilt and rotate with minimal light cutoff - which means - you can aim light precisely where it's needed. Engineered as a three piece system, the trim, light engine, and housing configures to specific lighting needs.

FEATURES

Trim

- Ø 3.375" [86mm] Aperture
- Die-cast aluminum trim
- Two piece and single piece trims are available w/optional regressed aperture glass lens
- Wet location listed
- Trim clips designed for 5/8" [16mm] ceiling thicknesses
- Trimless version available (see separate specifications)
- Ideal spacing 24" on center and 24" away from the wall

Light Engine

- Anodized black heat sink and media holder

Housings

- Rated for insulated. Non-insulated & Chicago plenum ceilings

PERFORMANCE SUMMARY—STANDARD DIMMING

Color Accuracy (SDCM)	≤ 1 × 2	
L70 Estimate (h)	50,000	
Color Rendering (CRI)	83	98
Lumen Series	3	
Source Lumens	1000	700
LED Wattage	10	9
Lumen Series	5	
Source Lumens	1500	1000
LED Wattage	14	12
Lumen Series	7	
Source Lumens	2000	1300
LED Wattage	20	17





LISTINGS




Wet
Location

DIMENSIONS—TRIM

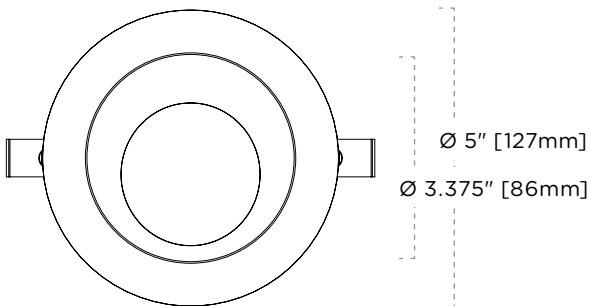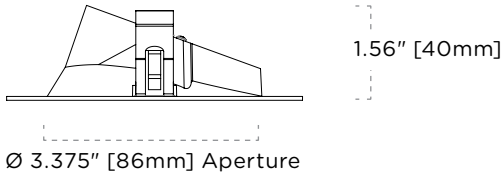

DIMENSIONS—LIGHT ENGINE

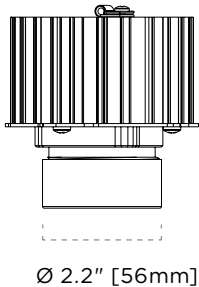

Contortionist™

4-114-T | Premium LED

Round Wall Wash

TAG TYPE



ORDER FORM

1	2	3	4	5	6	7

1. TRIM

4-114-T Round Wall Wash Downlight

2. FLANGE FINISH

- 01** White
- 04** Black
- 05** Matte Silver
- 06** Bronze
- 11** Matte Nickel
- CC** Custom Color¹

3. REFLECTOR FINISH

- 00** Single piece flange & reflector²
- 01** White
- 04** Black
- 05** Matte Silver
- 06** Bronze
- 11** Matte Nickel
- CC** Custom Color¹

4. MODULE & BEAM SPREAD

4-XTM40 40° Beam

5. COLOR TEMPERATURE

- 27** 2700K
- 30** 3000K
- 35** 3500K
- 40** 4000K
- BM27** Beauty 2700K³
- VB30** Vibrant 3000K

6. CRI, LUMENS, SERIES

- 8310** 83 CRI, 1000lm, 3 Series
- 9807** 98 CRI, 700lm, 3 Series
- 8315** 83 CRI, 1500lm, 5 Series
- 9810** 98 CRI, 1000lm, 5 Series
- 8320** 83 CRI, 2000lm, 7 Series
- 9813** 98 CRI, 1300lm, 7 Series

7. OPTIONS

EXT Extensions Clips (Maximum 2")

NOTES

- 1** CC custom color requires factory consultation.
- 2** Flange and reflector are a single piece and painted one color.
- 3** BM27 beauty color temperature is only available in 98 CRI.

SPECIFICATIONS

COLOR TEMPERATURES

- 2700K
- 2700K Beauty
- 3000K
- 3000K Vibrant
- 3500K
- 4000K


FLANGE FINISHES

- White
- Black
- Matte Silver
- Bronze
- Matte Nickel

REFLECTOR FINISHES

- White
- Black
- Matte Silver
- Bronze
- Matte Nickel


BEAM SPREADS



COMPATIBLE HOUSINGS


NON-INSULATED/FRAME IN

L4X-F-RA (Round Adjustable)
3, 5, 7 Series
L 13.75" W 9.75" H 5.5"
L 350mm W 248mm H 140mm




INSULATED AIRTIGHT

L4X-IC1A-RA (Round Adjustable)
3, 5 Series
L 21.125" W 9.75" H 5.75"
L 537mm W 248mm H 146mm




CHICAGO PLENUM

L4X-CP-RA (Round Adjustable)
3, 5 Series
L 13.625" W 10.875" H 5.5"
L 346mm W 276mm H 140mm



NON-INSULATED EMERGENCY

L4X-FEM-RA (Round Adjustable)
3, 5, 7 Series
L 13.75" W 10.875" H 5.5"
L 350mm W 277mm H 140mm



CERTIFICATIONS

