



# Contortionist™

4-514-TL | Premium LED

## Trimless Square Wall Wash

Our Contortionist™ series of hot adjustables twist & turn in ways you'll need to see to believe. These dual axis marvels of flexibility can tilt and rotate with minimal light cutoff - which means - you can aim light precisely where it's needed. Engineered as a three piece system, the trim, light engine, and housing configures to specific lighting needs.

### FEATURES

#### Trim

- 3.125" [79mm] Aperture
- Die-cast aluminum trim
- Wet location listed
- Ideal spacing 24" on center and 24" away from the wall

#### Light Engine

- Anodized black heat sink and media holder

#### Housings


- Rated for insulated. Non-insulated & Chicago plenum ceilings

### LISTINGS




Wet  
Location

### DIMENSIONS—TRIM

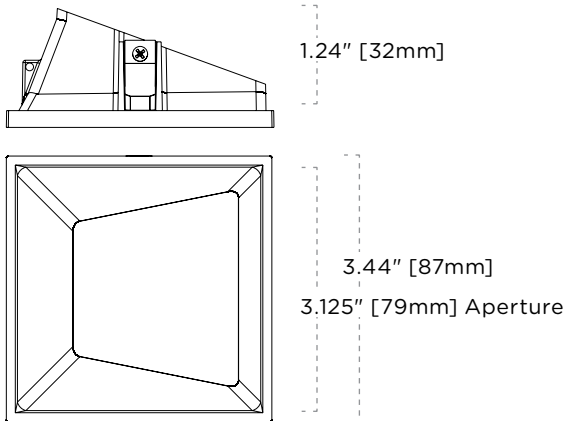


### DIMENSIONS—LIGHT ENGINE

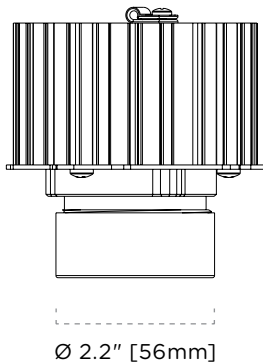

### PERFORMANCE SUMMARY—STANDARD DIMMING

Color Accuracy (SDCM)	≤ 1 × 2	
L70 Estimate (h)	50,000	
Color Rendering (CRI)	83	98
Lumen Series	3	
Source Lumens	1000	700
LED Wattage	10	9
Lumen Series	5	
Source Lumens	1500	1000
LED Wattage	14	12
Lumen Series	7	
Source Lumens	2000	1300
LED Wattage	20	17



## Trimless Square Wall Wash

### TAG TYPE



### ORDER FORM

1	2	3	4	5

#### 1. TRIM

##### 4-514-TL

Trimless Round Wall Wash Downlight

#### 2. REFLECTOR FINISH

01 White

04 Black

05 Matte Silver

06 Bronze

11 Matte Nickel

CC Custom Color<sup>1</sup>

#### 3. MODULE & BEAM SPREAD

4-XTM40 40° Beam

#### 4. COLOR TEMPERATURE

27 2700K

30 3000K

35 3500K

40 4000K

BM27 Beauty 2700K<sup>2</sup>

VB30 Vibrant 3000K

#### 5. CRI, LUMENS, SERIES

8310 83 CRI, 1000lm, 3 Series

9807 98 CRI, 700lm, 3 Series

8315 83 CRI, 1500lm, 5 Series

9810 98 CRI, 1000lm, 5 Series

8320 83 CRI, 2000lm, 7 Series

9813 98 CRI, 1300lm, 7 Series







#### NOTES

1 CC custom color requires factory consultation.

2 BM27 beauty color temperature is only available in 98 CRI.

## SPECIFICATIONS


### COLOR TEMPERATURES

-  2700K
-  2700K Beauty
-  3000K
-  3000K Vibrant
-  3500K
-  4000K

### REFLECTOR FINISHES

-  White
-  Black
-  Matte Silver
-  Bronze
-  Matte Nickel


### BEAM SPREADS



## COMPATIBLE HOUSINGS


### NON-INSULATED/FRAME IN

L4X-F-SA (Square Adjustable)  
3, 5, 7 Series  
L 13.75" W 9.75" H 5.5"  
L 350mm W 248mm H 140mm




### INSULATED AIRTIGHT

L4X-IC1A-SA (Square Adjustable)  
3, 5 Series  
L 21.125" W 9.75" H 5.75"  
L 537mm W 248mm H 146mm




### CHICAGO PLENUM

L4X-CP-SA (Square Adjustable)  
3, 5 Series  
L 13.625" W 10.875" H 5.5"  
L 346mm W 276mm H 140mm



### NON-INSULATED EMERGENCY

L4X-FEM-SA (Square Adjustable)  
3, 5, 7 Series  
L 13.75" W 10.875" H 5.5"  
L 350mm W 277mm H 140mm



## CERTIFICATIONS

