



Accents & Millwork

3-630 | Standard LED


Draco

Draco's miniature scale offers adjustable LED accent lighting equivalent to a 20W MR16. Capable of fitting in a tight space, Draco also sports a vertical adjustability.


FEATURES

- Utilizes low watt LED
- Damp location listed
- Ø 2.5" [64mm] Aperture
- 25° Vertical tilt
- Machined aluminum
- Powder coated and plated trim ring finishes
- Trim clips designed for 5/8" ceiling thickness
- Powered by a remote 350mA constant current driver (sold separately)

CEILING CUTOUT



DIMENSIONS

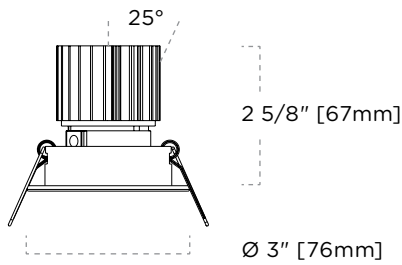

PERFORMANCE SUMMARY

L70 Estimate (h)	50,000
Driver Type	Remote (350mA)
Series	—
Color Rendering (CRI)	80
Source Lumens	400
LED Wattage	5


FLANGE FINISHES

- White
- Chrome Plated
- Black
- Matte Silver
- Bronze
- Matte Nickel

COLOR TEMPERATURES

- 2700K
- 3000K
- 4000K

BEAM SPREADS



Accents & Millwork

3-630 | Standard LED



Draco

TAG TYPE

ORDER FORM

1	2	3	4

1. TRIM

3-630 Draco

2. FLANGE FINISH

- 01 White
- 02 Chrome Plated
- 04 Black
- 05 Matte Silver
- 06 Bronze
- 11 Matte Nickel

3. LED MODULE/BEAM SPREAD

LED22 22° Beam

LED36 36° Beam

4. COLOR TEMPERATURE

27 2700K

30 3000K

40 4000K

COMPATIBLE DRIVERS

0-10V DIMMING


SMOOTH, FLICKER-FREE DIMMING FROM 100% TO 10%.

D1CH-DIM

Channels: 1 Voltage: 120/277

Min. Load Units: 2

Max. Load Units: 3




D2CH-DIM

Channels: 2 Voltage: 120/277

Min. Load Units: 1

Max. Load Units: 4/Ch




D4CH-DIM

Channels: 4 Voltage: 120/277

Min. Load Units: 1

Max. Load Units: 4/Ch



ELECTRONIC LOW VOLTAGE (ELV)


SMOOTH, FLICKER-FREE DIMMING FROM 100% TO 20%.

D10W-DIM

Channels: 1 Voltage: 120

Min. Load Units: 1

Max. Load Units: 2




D15W-DIM

Channels: 1 Voltage: 120

Min. Load Units: 3

Max. Load Units: 3



CERTIFICATIONS

