



# LED PIPE™

C1P | Standard LED

## 1" Round Fixed Pendant

Our LED Pipe™ family of cylinders provide architects and lighting designers with almost limitless design possibilities. Whether you need to light a space with inaccessible ceilings, disappear among the pipes and ducts of an open-ceiling design, focus attention on a specific architectural detail or make a dramatic statement, you can solve almost any lighting problem with a LED Pipe™.


### FEATURES

- Damp location listed
- Ø 1" [25mm] Aperture
- Cord mount
- Extruded aluminum cylinder body
- Machine aluminum components
- Powder coated finishes
- Designed for 0.06" - 1.25" ceiling thickness

### PERFORMANCE SUMMARY

Color Accuracy (SDCM)	<3
L70 Estimate (h)	50,000
Color Rendering (CRI)	90
Lumen Series	—
Source Lumens	180
LED Wattage	2

### DIMENSIONS

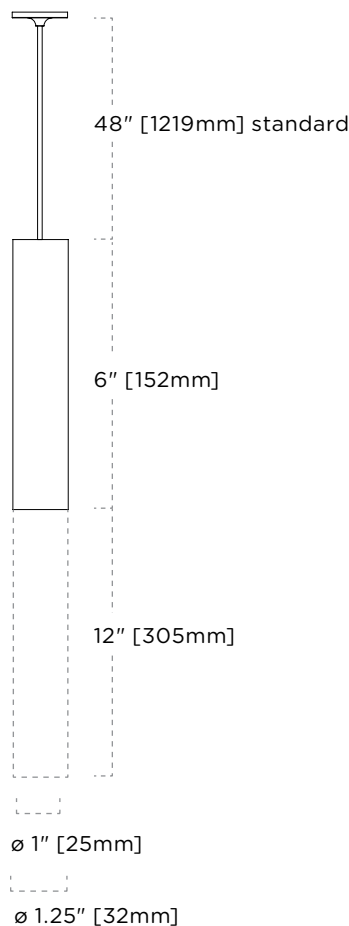

### FINISHES

- Anthracite Metallic
- Espresso Metallic
- Glimmer Gold
- Ink Black Metallic
- Nano White
- Slate Grey Metallic
- Terra Metallic


### WIRE COLORS

- Clear Metallic Braid

### COLOR TEMPERATURES

- 2700K
- 3000K
- 3500K
- 4000K

### BEAM SPREADS



## 1" Round Fixed Pendant—Remote Driver



### TAG TYPE

--	--	--	--	--	--	--	--	--

### ORDER FORM—CYLINDER

1	2	3	4	5	6	7	8	9

#### 1. TRIM

**C1P** 1" Fixed Pendant<sup>1</sup>

#### 2. APERTURE

**R** Round

#### 3. LAYOUT

**6** 6" Cylinder Length

**12** 12" Cylinder Length

#### 4. FINISH

**21** Nano White

**23** Anthracite Metallic

**24** Ink Black Metallic

**25** Slate Grey Metallic

**26** Espresso Metallic

**27** Terra Metallic

**28** Glimmer Gold

**CC** Custom Color

#### 5. REFLECTOR FINISH

**21** Nano White

**23** Anthracite Metallic

**24** Ink Black Metallic

**25** Slate Grey Metallic

**26** Espresso Metallic

**27** Terra Metallic

**28** Glimmer Gold

**CC** Custom Color

#### 6. MODULE & BEAM SPREAD

**L12** 12° Beam

**L22** 22° Beam

**L46** 46° Beam

#### 7. COLOR TEMPERATURE

**27** 2700K

**30** 3000K

**35** 3500K

**40** 4000K

#### 8. CRI, LUMENS

**9002** 90 CRI, 180lm

#### 9. DIMMING

**RT** Remote Driver<sup>2</sup>

#### NOTES

**1** C1P comes with 48" cord length standard. For additional cord length consult factory.

**2** Remote driver ordered separately.

### ORDER FORM—REMOTE DRIVER

1	2	3	4	5	6

#### 1. REMOTE DRIVER

**DTM**

#### 2. SERIES

**700** 700mA constant current output

#### 3. CHANNEL

**1** 1 Channel

#### 4. CONFIGURATION<sup>1</sup>

**A** Configuration A

**B** Configuration B

#### 5. DIMMING

**LE** Lutron Phase (1%)<sup>2</sup>

**LH** Lutron EcoSystem (1%)

**P** 0-10V Dimming (10%)

**P1** 0-10V Dimming (1%)

**S** ELV Dimming (10%)<sup>2</sup>

#### 6. VOLTAGE

**120** 120V


**277** 277V

#### NOTES

**1** Refer to remote driver compatibility chart.

**2** LE & S dimmings are only available in 120 voltage.

## REMOTE DRIVER DIMENSIONS

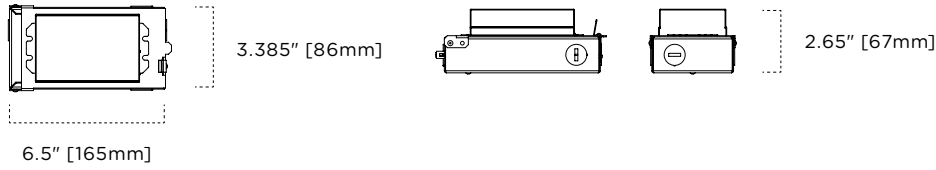

## REMOTE DRIVER COMPATIBILITY

DRIVER TYPE	SERIES	CH.	CONFIG.	*Dimming Type <sup>1,2</sup>	MIN LOAD UNITS	MAX LOAD UNITS
DTM	700	1	A	LE	3	6
				LH	4	7
				P	6	9
				P1	1	12
			B	S	6	9
				LE	6	12
				LH	8	12
				P	8	12
			S	8	12	

\*Maximum remote mounting distance (Wire length).

**1** LE, LH : 100' using 12 AWG, 50' using 14 AWG.

**2** P, P1, S : 100' using 14 AWG, 50' using 16 AWG.

## CERTIFICATIONS

