



LED PIPE™

C5P | Standard LED

5" Round Fixed Pendant

Our LED Pipe™ family of cylinders provide architects and lighting designers with almost limitless design possibilities. Whether you need to light a space with inaccessible ceilings, disappear among the pipes and ducts of an open-ceiling design, focus attention on a specific architectural detail or make a dramatic statement, you can solve almost any lighting problem with a LED Pipe™.

FEATURES

- Damp location listed
- Ø 5.38" [137mm] Aperture
- Single media ready
- Clear lens standard
- Stem mount with 30° hang straight, optional cord mount
- Extruded aluminum cylinder body
- Machine aluminum components
- Powder coated finishes
- Mounts to 4" octagonal junction box
- Conduit mount option available

PERFORMANCE SUMMARY


Color Accuracy (SDCM)	<3	
L70 Estimate (h)	50,000	
Color Rendering (CRI)	80	90
Lumen Series		
Source Lumens	2700	2300
LED Wattage	17	17
Lumen Series		
Source Lumens	3500	3000
LED Wattage	25	25
Lumen Series		
Source Lumens	4300	3700
LED Wattage	32	32
Lumen Series		
Source Lumens	5500	4700
LED Wattage	42	42

*Consult factory for additional lower lumen options.


COLOR TEMPERATURES




BEAM SPREADS

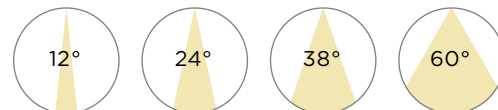

DIMENSIONS—SIDE

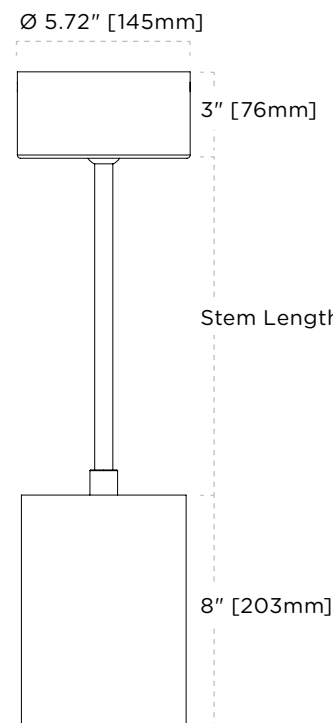

DIMENSIONS—BOTTOM

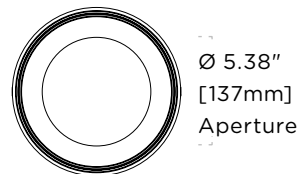

Ø 5.72" [145mm]

FINISHES

- Anthracite Metallic
- Espresso Metallic
- Glimmer Gold
- Ink Black Metallic
- Nano White
- Slate Grey Metallic
- Terra Metallic

CERTIFICATIONS



C5P-5in-Pendant-Cylinder-Standard-LED-Specs p. 1/3


Product specifications and dimensions are subject to change without notice

All rights reserved. © 2021 Lightheaded Lighting Ltd. Rev 2021.01.15

info@lightheadedlighting.com P. 604.464.5644 T. 1.800.464.9544

LIGHTHEADED™

5" Round Fixed Pendant



TAG TYPE

ORDER FORM

1	2	3	4	5	6	7	8	9	10	11	12

1. TRIM

C5P 5" Pendant

2. APERTURE

R Round

3. LAYOUT

8 8"

4. FINISH

- 21** Nano White
- 23** Anthracite Metallic
- 24** Ink Black Metallic
- 25** Slate Grey Metallic
- 26** Espresso Metallic
- 27** Terra Metallic
- 28** Glimmer Gold
- CC** Custom Color

5. REFLECTOR FINISH

- 21** Nano White
- 23** Anthracite Metallic
- 24** Ink Black Metallic
- 25** Slate Grey Metallic
- 26** Espresso Metallic
- 27** Terra Metallic
- 28** Glimmer Gold
- CC** Custom Color

6. MODULE & BEAM SPREAD

- B12** 12° Beam
- B24** 24° Beam
- B38** 38° Beam
- B60** 60° Beam

7. COLOR TEMPERATURE

- 27** 2700K
- 30** 3000K
- 35** 3500K
- 40** 4000K

8. CRI, LUMENS¹

- 8027** 80 CRI, 2700 Lumens
- 9023** 90 CRI, 2300 Lumens
- 8035** 80 CRI, 3500 Lumens
- 9030** 90 CRI, 3000 Lumens
- 8043** 80 CRI, 4300 Lumens
- 9037** 90 CRI, 3700 Lumens
- 8055** 80 CRI, 5500 Lumens
- 9047** 90 CRI, 4700 Lumens

9. DIMMING

- LE** Lutron Phase (1%)^{2,3}
- LH** Lutron EcoSystem (1%)³
- P** 0-10V Dimming (1%)
- P1** eldoLED 0-10V Dimming (1%)⁴
- S** Phase Dimming (5%)

10. VOLTAGE

- 120** 120V
- 277** 277V
- 347** 347V^{5,6}

11. MOUNTING

- C** Cord, surface mount to recessed junction box⁷
- S** Stem surface mount to recessed junction box⁸
- CCM** Cord, surface conduit mount to surface mount 4" octagonal junction box.^{7,9}
- SCM** Stem, surface conduit mount to surface mount 4" octagonal junction box.^{8,9}

12. OPTIONAL MEDIA (1 MAX.)¹⁰


- FR** Frosted
- HC** Honeycomb
- SL** Softening
- SPDL** Spread

NOTES


- 1** Consult factory for additional lower lumen options.
- 2** LE dimming is only available in 120V.
- 3** LE & LH dimming are only available in 8027 & 9023 CRI, Lumens.
- 4** P1 dimming is NOT available in 8055, 9047, 8043 & 9037 CRI, Lumens.
- 5** 347V voltage is only available in P dimming.
- 6** 347V is NOT available in 8055 & 9047 CRI, Lumens.
- 7** 96" cord length standard. Cord color is white when 21 Nano White finish is selected. Cord color is black for all other finishes.
- 8** 48" stem length standard. For additional stem length consult factory.
- 9** CCM & SCM mounts over 4" octagonal junction box (by others). Comes with 2 conduit feed covers & 3 blank covers. Consult factory for additional conduit accessories.
- 10** Optional media replaces clear media when selected.

5" CEILING CANOPY


SURFACE MOUNT TO RECESSED 4" JUNCTION BOX

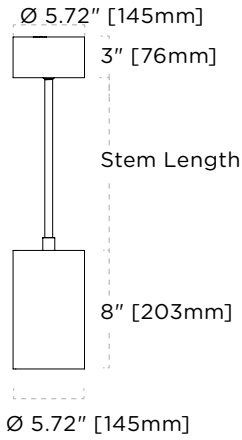


FINISHED INSTALL

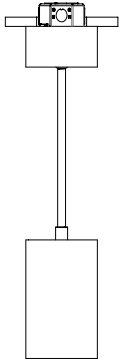


CANOPY ASSEMBLY

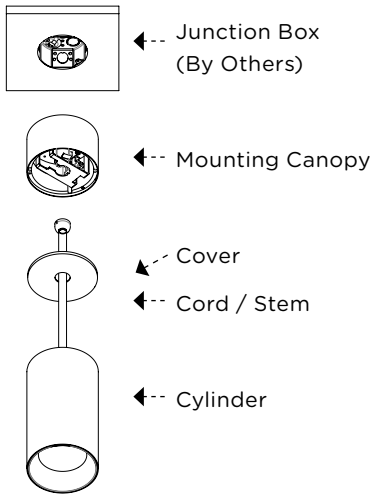


SURFACE CONDUIT MOUNT TO 4" OCTAGONAL JUNCTION BOX WITH CONDUIT ENTRY

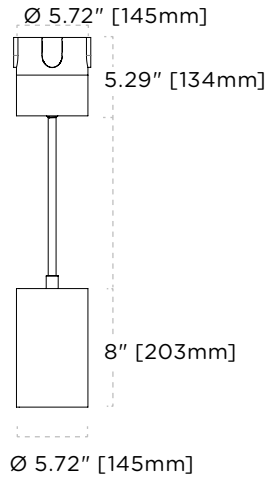

FINISHED INSTALL

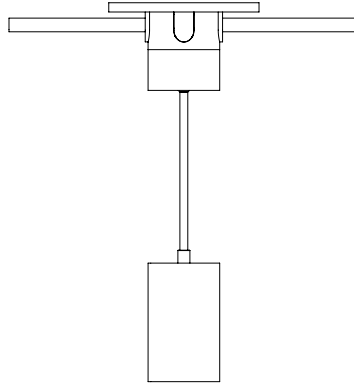


CANOPY ASSEMBLY

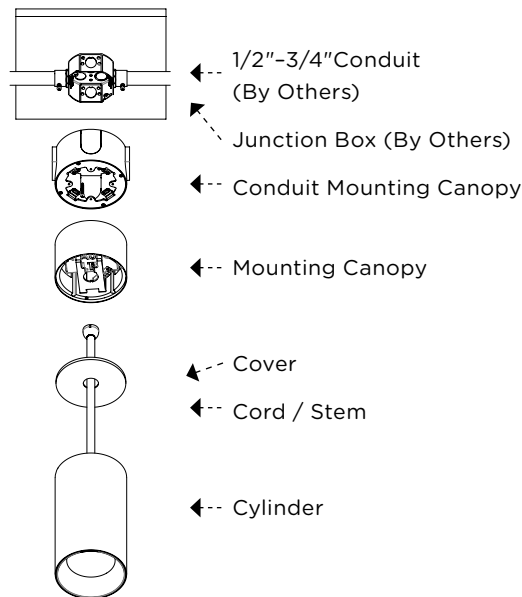

CONDUIT ACCESSORIES

FEED COVER BLANK COVER



4" OCTAGONAL JUNCTION BOX (BY OTHERS)

