

Legacy Downlights

2-582-T | Health LED

Quadra Wall Wash

Careful lamp positioning above the glass spread lens optimizes uniformity. The Quadra Wall Wash has a strategically placed reflector and lens that optimizes uniform vertical illumination. The BIOS® SkyBlue Dynamic Spectrum lighting provides full daytime circadian stimulus, communicating directly with human circadian biology.

FEATURES

- Wet location listed
- 3" [77mm] Aperture
- Ideal spacing 30" on center and 24" away from wall
- Dimming from High M/P LED Spectrum @ 3500K to Low M/P LED Spectrum @ 3000K
- Die-cast aluminum fixture
- Powder coated and plated trim ring finishes
- Trim clips designed for 5/8" ceiling thickness

PERFORMANCE SUMMARY

Color Rendering (CRI)	83
Lumen Series	3
Source Lumens	1000
LED Wattage	12
Lumen Series	5
Source Lumens	1800
LED Wattage	17
Lumen Series	7
Source Lumens	2300
LED Wattage	24



LISTINGS




Wet
Location




BIOS® SkyBlue
Dynamic Spectrum

DIMENSIONS—3 SERIES

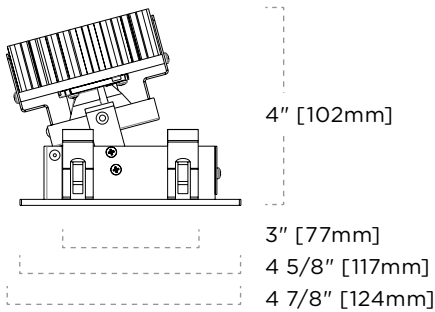

DIMENSIONS—5 & 7 SERIES

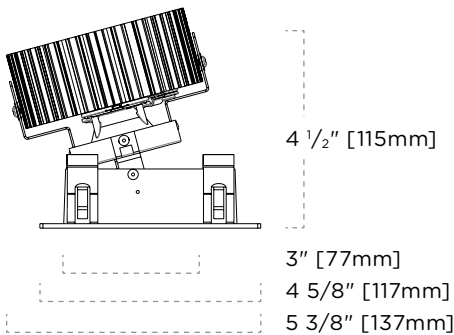

Legacy Downlights

2-582-T | Health LED

Quadra Wall Wash



TAG TYPE

--

ORDER FORM

1	2	3	4	5	6

1. TRIM

2-582-T Quadra Wall Wash

2. FLANGE FINISH

- 01** White
- 04** Black
- 05** Matte Silver
- 06** Bronze
- 11** Matte Nickel
- CC** Custom Color¹

NOTES

1 CC custom color requires consultation with Lightheaded sales personnel.

3. MODULE & BEAM SPREAD

BDY40 40° Beam, BIOS-DY Dynamic Module

4. COLOR TEMPERATURE

35 3500K

5. CRI, LUMENS, SERIES

- 8310** 83 CRI, 1000lm, 3 Series
- 8318** 83 CRI, 1800lm, 5 Series
- 8323** 83 CRI, 2300lm, 7 Series

6. OPTIONS


EXT Extension Clips (Maximum 2")

SPECIFICATIONS


FLANGE FINISHES

-  White
-  Black
-  Matte Silver
-  Bronze
-  Matte Nickel


COLOR TEMPERATURES

-  3500K

BEAM SPREADS




DYNAMIC SPECTRAL POWER DISTRIBUTION

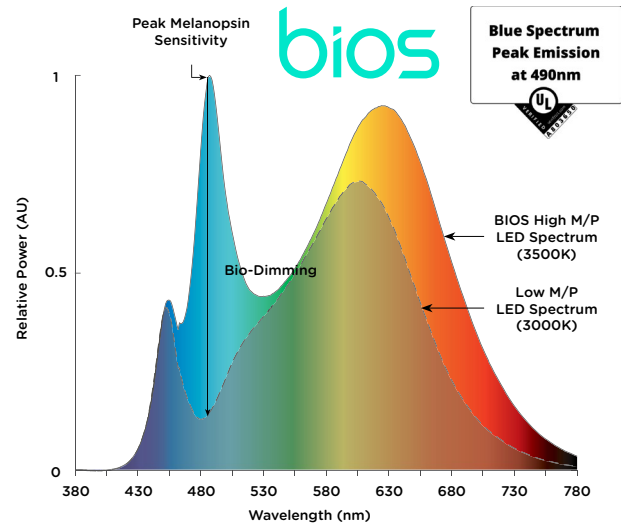


COMPATIBLE HOUSINGS

NON-INSULATED/FRAME IN

D4BDY-F-S
3, 5 Series
L 10.5" W 7.75" H 4.5"
L 267mm W 197mm H 115mm




D4BDY-F-S
7 Series
L 13.75" W 10.875" H 4.5"
L 350mm W 277mm H 115mm



INSULATED AIRTIGHT

D4BDY-IC1A-S
3 Series
L 22.5" W 8.5" H 5.875"
L 572mm W 216mm H 150mm



CERTIFICATIONS

