



Legacy Downlights

2-112-T | Premium LED

Round Wall Wash

Round Wall Wash employs a strategically placed reflector and lens combination to cast a broad asymmetric beam. Perfect for brightening feature walls, both indoors and in wet locations: showers, spas, entry ways, outdoor living rooms, and dining areas.


FEATURES

- Ø 3 5/8" [93mm] Aperture
- Wet location listed
- 20° Fixed vertical tilt
- Ideal spacing 30" on center and 24" away from the wall
- Die-cast aluminum fixture
- Powder coated and plated trim ring finishes
- Trim clips designed for 5/8" ceiling thickness

LISTINGS



DIMENSIONS—3, 5, 7 & 9 SERIES

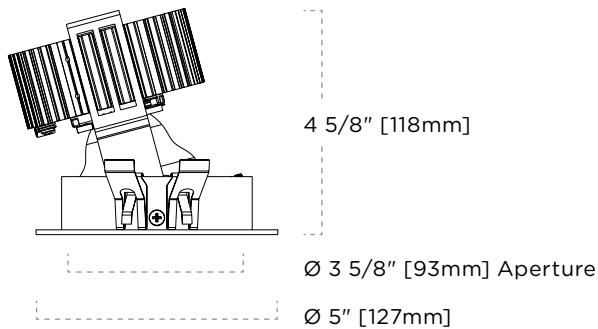

PERFORMANCE SUMMARY

Color Accuracy (SDCM)	≤ 1 x 2	
L70 Estimate (h)	50,000	
Color Rendering (CRI)	83	98
Lumen Series	3	
Source Lumens	1000	700
LED Wattage	10	9
Lumen Series	5	
Source Lumens	1500	1000
LED Wattage	14	12
Lumen Series	7	
Source Lumens	2000	1300
LED Wattage	20	17
Lumen Series	9	
Source Lumens	2700	2100
LED Wattage	24	24

Legacy Downlights

2-112-T | Premium LED

Round Wall Wash



TAG TYPE

--	--	--	--	--	--

ORDER FORM

1	2	3	4	5	6

1. TRIM

2-112-T Round Wall Wash

2. FLANGE FINISH

- 01** White
- 02** Chrome Plated
- 04** Black
- 05** Matte Silver
- 06** Bronze
- 11** Matte Nickel
- CC** Custom Color¹

3. MODULE & BEAM SPREAD

XTM40 40° Beam

4. COLOR TEMPERATURE

- 27** 2700K
- 30** 3000K
- 35** 3500K
- 40** 4000K
- BM27** Beauty 2700K²
- VB30** Vibrant 3000K

5. CRI, LUMENS, SERIES

- 8310** 83 CRI, 1000lm, 3 Series
- 9807** 98 CRI, 700lm, 3 Series
- 8315** 83 CRI, 1500lm, 5 Series
- 9810** 98 CRI, 1000lm, 5 Series
- 8320** 83 CRI, 2000lm, 7 Series
- 9813** 98 CRI, 1300lm, 7 Series
- 8327** 83 CRI, 2700lm, 9 Series
- 9821** 98 CRI, 2100lm, 9 Series

6. OPTIONS

EXT Extension Clips (Maximum 2")

NOTES





- 1** CC custom color requires consultation with Lightheaded sales personnel.
- 2** BM27 beauty color temperature is only available in 9807, 9810, 9813.

SPECIFICATIONS


REFLECTOR FINISHES

-  White
-  Chrome Plated
-  Black
-  Matte Silver
-  Bronze
-  Matte Nickel

COLOR TEMPERATURES

-  2700K
-  2700K Beauty
-  3000K
-  3000K Vibrant
-  3500K
-  4000K

BEAM SPREADS



PHOTOMETRIC DATA

CONVERSION CHART

CRI	LUMENS	CCT / MULTIPLIER				Typical System Power
		2700K	3000K	3500K	4000K	
83	1000	0.55				13W
	1500	0.75				17W
	2000	1 (Baseline)				23.5W
	2700	1.35				28W
98	700	0.40				12W
	1000	0.53				15W
	1300	0.65				22W
	2100	1.07				28W

7 SERIES, 40° BEAM, 3000K, 83 CRI, 2000 LUMENS


Report: L10136401

Trim Model: 2-112-T-01-XTM40-30-8320

Efficacy: 59lm/W

System Power: 23.5W

Lumen: 1395lm

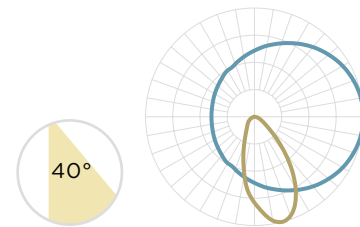


OUTPUT

DISTANCE		VIEWING ANGLE											
FT	M	0°		15° (MAX)		30°		45°		60°		75°	
		FC	LUX	FC	LUX	FC	LUX	FC	LUX	FC	LUX	FC	LUX
6	1.8	33.5	361.0	42.5	457.1	32.1	345.8	12.4	133.8	3.7	39.7	1.2	13.2
8	2.4	18.9	203.1	23.9	257.1	18.1	194.5	7.0	75.3	2.1	22.3	0.7	7.4
10	3.0	12.1	130.0	15.3	164.6	11.6	124.5	4.5	48.2	1.3	14.3	0.4	4.8
12	3.7	8.4	90.2	10.6	114.3	8.0	86.4	3.1	33.5	0.9	9.9	0.3	3.3
14	4.3	6.2	66.3	7.8	84.0	5.9	63.5	2.3	24.6	0.7	7.3	0.2	2.4
16	4.9	4.7	50.8	6.0	64.3	4.5	48.6	1.7	18.8	0.5	5.6	0.2	1.9


COMPATIBLE HOUSINGS

NON-INSULATED/FRAME IN


D4X-F-R
3, 5 Series
L 10.5" W 7.75" H 4.5"
L 267mm W 197mm H 115mm




D4X-F-R
7, 9 Series
L 13.75" W 10.875" H 4.5"
L 350mm W 277mm H 115mm



D4X-FD-R
3, 5 Series
L 10.5" W 7.75" H 5.5"
L 267mm W 197mm H 140mm




D4X-FD-R
7, 9 Series
L 13.75" W 10.875" H 5.5"
L 350mm W 277mm H 140mm




INSULATED AIRTIGHT

D4X-IC1A-R
3, 5 Series
L 22.5" W 8.5" H 5.875"
L 572mm W 216mm H 150mm




D4X-IC2A-R
3 Series
L 13.75" W 10.875" H 8.125"
L 350mm W 277mm H 207mm




NEW CONSTRUCTION PLATE

R4P-F-R
3, 5, 7, 9 Series
L 6.5" W 6.375" H 1"
L 166mm W 162mm H 26mm




REMODEL DRIVER

DRX
3, 5, 7, 9 Series
L 8.25" W 3.25" H 2.75"
L 210mm W 83mm H 70mm




CHICAGO PLENUM

D4X-CP-R
3, 5 Series
L 13.75" W 10.875" H 4.5"
L 350mm W 277mm H 115mm




EMERGENCY HOUSING

D4X-FEM-R
3, 5, 7, 9 Series
L 13.75" W 10.875" H 4.5"
L 350mm W 277mm H 115mm



D4X-FDEM-R
3, 5, 7, 9 Series
L 13.75" W 10.875" H 5.5"
L 350mm W 277mm H 140mm



CERTIFICATIONS

