

## Accents & Millwork

3-645 | Standard LED

### Square Vela

Tucked into soffits or niches, The Vela fixture extends the reflector finish down onto the flange, to frame the luminous aperture. This elegant mini adds a touch of visual interest to downlighting task areas or highlighting objet d'art.

#### FEATURES

- Utilizes low watt LED
- Damp location listed
- Ø 2.5" [64mm] Aperture
- Machined aluminum
- Powder coated and plated trim ring finishes
- Trim clips designed for 5/8" ceiling thickness
- Powered by a remote 350mA constant current driver (sold separately)

#### PERFORMANCE SUMMARY

L70 Estimate (h)	50,000
Driver Type	Remote (350mA)
Series	—
Color Rendering (CRI)	80
Source Lumens	400
LED Wattage	5


#### FLANGE FINISHES

- White
- Chrome Plated
- Black
- Matte Silver
- Bronze
- Matte Nickel


#### COLOR TEMPERATURES

- 2700K
- 3000K
- 4000K


#### BEAM SPREADS



#### CEILING CUTOUT



#### DIMENSIONS

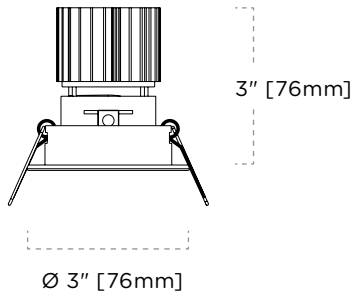

# Accents & Millwork

3-645 | Standard LED



## Square Vela

### TAG TYPE



### ORDER FORM

1	2	3	4	5

#### 1. TRIM

**3-645** Square Vela

#### 2. FLANGE FINISH

- 01** White
- 02** Chrome Plated
- 04** Black
- 05** Matte Silver
- 06** Bronze
- 11** Matte Nickel

#### 3. REFLECTOR FINISH

- SAS** Satin Silver
- WHO** White Open Reflector
- BLO** Black Open

#### 4. LED MODULE & BEAM

- LED22** 22° Beam
- LED36** 36° Beam

#### 5. COLOR TEMPERATURE

- 27** 2700K
- 30** 3000K
- 40** 4000K


### COMPATIBLE DRIVERS

#### REMOTE 0-10V DIMMING

**SMOOTH, FLICKER-FREE DIMMING FROM 100% TO 10%.**


##### D1CH-DIM

Channels: 1 Voltage: 120/277  
Min. Load Units: 2  
Max. Load Units: 3




##### D2CH-DIM

Channels: 2 Voltage: 120/277  
Min. Load Units: 1  
Max. Load Units: 4/Ch



##### D4CH-DIM

Channels: 4 Voltage: 120/277  
Min. Load Units: 1  
Max. Load Units: 4/Ch



#### REMOTE ELECTRONIC LOW VOLTAGE (ELV)

**SMOOTH, FLICKER-FREE DIMMING FROM 100% TO 20%.**


##### D10W-DIM

Channels: 1 Voltage: 120  
Min. Load Units: 1  
Max. Load Units: 2



##### D15W-DIM

Channels: 1 Voltage: 120  
Min. Load Units: 3  
Max. Load Units: 3



### CERTIFICATIONS

