




LISTINGS



California
Title 24 JA8

DIMENSIONS—3 SERIES

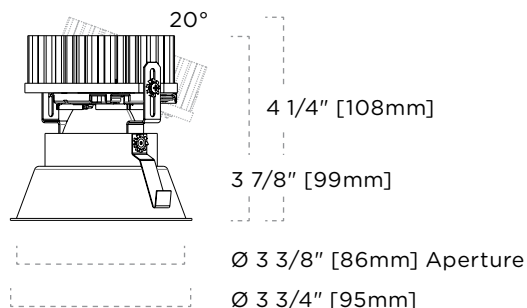

Legacy Downlights

2-120-TL | Premium LED

Trimless Aurora

Our top-selling Aurora + Miro luminaires feature regressed LED modules and optics for glare-free downlighting. Available in a myriad of reflector, trim, and color temperature combinations, Aurora + Miro will blend discretely into any décor.


FEATURES

- Damp location listed
- Ø 3 3/8" [86mm] Aperture
- 20° vertical tilt
- Clear media standard
- Accepts up to 2 media
- Die-cast aluminum fixture
- Powder coated and plated trim ring finishes
- Trim clips designed for 5/8" ceiling thickness

PERFORMANCE SUMMARY

Color Accuracy (SDCM)	≤ 1 x 2	
L70 Estimate (h)	50,000	
Color Rendering (CRI)	83	98
Lumen Series	3	
Source Lumens	1000	700
LED Wattage	10	9
California Title 24 Compliant		


BEAM SPREADS



COLOR TEMPERATURES



REFLECTOR FINISHES

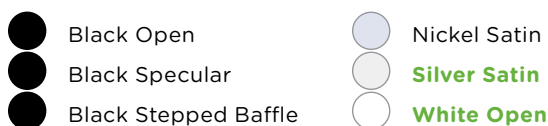

Legacy Downlights

2-120-TL | Premium LED

Trimless Aurora



TAG TYPE

--	--	--	--	--	--

ORDER FORM

1	2	3	4	5	6

1. TRIM

2-120-TL Trimless Aurora

2-120-TLW Wood Trimless Aurora

2. REFLECTOR FINISH

BA Black Specular

BLO Black Open

BLS Black Stepped

NICS Nickel Satin

SAS Satin Silver

WHO White Open

3. MODULE & BEAM SPREAD

XTM28 28° Beam

XTM40 40° Beam

XTM60 60° Beam

4. COLOR TEMPERATURE

27 2700K

30 3000K

35 3500K

40 4000K

BM27 Beauty 2700K 1

VB30 Vibrant 3000K

5. CRI, LUMENS, SERIES

8310 83 CRI, 1000lm, 3 Series

9807 98 CRI, 700lm, 3 Series

6. OPTIONAL MEDIA (2 MAXIMUM)

CL Clear

EL Elongating

FRO Frosted

HC Honeycomb

PER Perimeter Frosted

SL Solite Softening

SPDL Spread

NOTES

1 BM27 beauty color temperature is only available in 9807 CRI, lumens, series.

PHOTOMETRIC DATA

CONVERSION CHART

CRI	LUMENS	CCT / MULTIPLIER				TYPICAL SYSTEM POWER
		2700K	3000K	3500K	4000K	
83	1000	1 (Baseline)				13W
98	700	0.72				12W

3 SERIES, 40° BEAM, 3000K, 83 CRI, 1000 LUMENS

Report: L08133501

Trim Model: 2-120-TL-SAS-XTM40-30-8310

Efficacy: 75lm/W

System Power: 12.8 W

Lumen: 964lm

OUTPUT

DISTANCE		BEAM DIAMETER		OUTPUT	
FT	M	FT	M	FC	LUX
6	1.8	5.1	1.55	41.6	447.6
8	2.4	6.8	2.07	23.4	251.8
10	3.0	8.5	2.59	15.0	161.1
12	3.7	10.2	3.11	10.4	111.9
14	4.3	11.9	3.63	7.6	82.2
16	4.9	13.6	4.15	5.8	62.9

3 SERIES, 60° BEAM, 3000K, 83 CRI, 1000 LUMENS

Report: L08133502R01

Trim Model: 2-120-TL-SAS-XTM60-30-8310

Efficacy: 67lm/W

System Power: 12.8 W

Lumen: 860lm


OUTPUT

DISTANCE		BEAM DIAMETER		OUTPUT	
FT	M	FT	M	FC	LUX
6	1.8	6.9	2.10	27.8	298.7
8	2.4	9.2	2.80	15.6	168.0
10	3.0	11.5	3.51	10.0	107.5
12	3.7	13.9	4.24	6.9	74.7
14	4.3	16.2	4.94	5.1	54.9
16	4.9	18.5	5.64	3.9	42.0


COMPATIBLE HOUSINGS—TRIMLESS & WOOD TRIMLESS

NON-INSULATED/FRAME IN

D4X-F-R
3 Series
L 10.5" W 7.75" H 4.5"
L 267mm W 197mm H 115mm




D4X-FD-R
3 Series
L 10.5" W 7.75" H 5.5"
L 267mm W 197mm H 140mm




INSULATED AIRTIGHT

D4X-IC1A-R
3 Series
L 22.5" W 8.5" H 5.875"
L 572mm W 216mm H 150mm




D4X-IC2A-R
3 Series
L 13.75" W 10.875" H 8.125"
L 350mm W 277mm H 207mm




NEW CONSTRUCTION PLATE

R4P-F-R
3 Series
L 6.5" W 6.375" H 1"
L 166mm W 162mm H 26mm




REMODEL DRIVER

DRX
3 Series
L 8.25" W 3.25" H 2.75"
L 210mm W 83mm H 70mm



CHICAGO PLENUM


D4X-CP-R
3 Series
L 13.75" W 10.875" H 4.5"
L 350mm W 277mm H 115mm




COMPATIBLE HOUSINGS—TRIMLESS ONLY

EMERGENCY HOUSING

D4X-FEM-R
3 Series
L 13.75" W 10.875" H 4.5"
L 350mm W 277mm H 115mm



D4X-FDEM-R
3 Series
L 13.75" W 10.875" H 5.5"
L 350mm W 277mm H 140mm



CERTIFICATIONS

