



# Legacy Downlights

2-125-TL | Premium LED

## Trimless Deep Aurora

Deep Aurora provides an excellent cutoff where occupants require glare-free downlighting. The smaller lumen packages are highly effective in low mounting heights, while the larger packages supply efficient illumination from high ceilings.

### FEATURES

- Damp location listed
- Ø 3 3/8" [86mm] Aperture
- 2 1/4" lamp regression above the ceiling plane for excellent glare control
- Clear media standard
- Accepts up to 2 media
- Die-cast aluminum fixture
- Powder coated and plated trim ring finishes
- Trim clips designed for 5/8" ceiling thickness

### PERFORMANCE SUMMARY


Color Accuracy (SDCM)	≤ 1 x 2	
L70 Estimate (h)	50,000	
Color Rendering (CRI)	83	98
Lumen Series	3	
Source Lumens	1000	<b>700</b>
LED Wattage	10	<b>9</b>
<b>California Title 24 Compliant</b>		

### LISTINGS



California  
Title 24 JA8


### DIMENSIONS

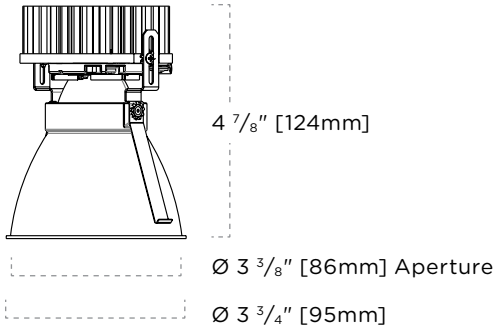

### REFLECTOR FINISHES

- Black Open
- Nickel Satin
- Silver Satin
- White Open

### BEAM SPREADS



### COLOR TEMPERATURES

- 2700K
- 2700K Beauty
- 3000K
- 3000K Vibrant
- 3500K
- 4000K

# Legacy Downlights

2-125-TL | Premium LED

## Trimless Deep Aurora



### TAG TYPE



### ORDER FORM

1	2	3	4	5

#### 1. TRIM

**2-125-TL** Trimless Deep Aurora

**2-125-TLW** Wood Trimless Deep Aurora<sup>1</sup>

#### 2. REFLECTOR FINISH

**BLO** Black Open

**NICS** Nickel Satin

**SAS** Satin Silver

**WHO** White Open

**CC** Custom Color<sup>1</sup>

#### 3. MODULE & BEAM SPREAD

**XTM28** 28° Beam

**XTM40** 40° Beam

**XTM60** 60° Beam

#### 4. COLOR TEMPERATURE

**27** 2700K

**30** 3000K

**35** 3500K

**40** 4000K

**BM27** Beauty 2700K<sup>2</sup>

**VB30** Vibrant 3000K

#### 5. CRI, LUMENS, SERIES

**8310** 83 CRI, 1000lm, 3 Series

**9807** 98 CRI, 700lm, 3 Series

**6.** Optional Media (2 Maximum)

**CL** Clear

**EL** Elongating

**FRO** Frosted

**HC** Honeycomb

**PER** Perimeter Frosted

**SL** Solite Softening

**SPDL** Spread

#### NOTES

**1** BM27 beauty color temperature is only available in 9807.

**2** Wood trimless collar will be painted to match TLW wood trimless reflector finish.

## PHOTOMETRIC DATA

### CONVERSION CHART

CRI	LUMENS	CCT / MULTIPLIER				TYPICAL SYSTEM POWER
		2700K	3000K	3500K	4000K	
83	1000	1 (Baseline)				13W
98	700	0.72				17W

### 3 SERIES, 40° BEAM, 3000K, 83 CRI, 1000 LUMENS


Report: L021501202

Trim Model: 2-125-TL-SAS-XTM40-30-8310

Efficacy: 81lm/W

System Power: 12.8 W

Lumen: 1035lm

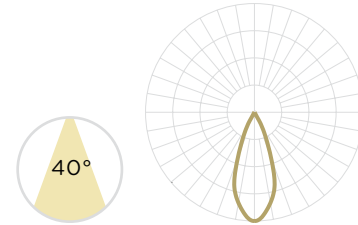

### OUTPUT

DISTANCE		BEAM DIAMETER		OUTPUT	
FT	M	FT	M	FC	LUX
6	1.8	5.1	1.55	71.9	774.1
8	2.4	6.8	2.07	40.5	435.4
10	3.0	8.5	2.59	25.9	278.7
12	3.7	10.2	3.11	18.0	193.5
14	4.3	11.9	3.63	13.2	142.2
16	4.9	13.6	4.15	10.1	108.9

### 3 SERIES, 60° BEAM, 3000K, 83 CRI, 1000 LUMENS


Report: L021501203

Trim Model: 2-125-TL-SAS-XTM60-30-8310

Efficacy: 72lm/W

System Power: 12.8 W

Lumen: 918lm

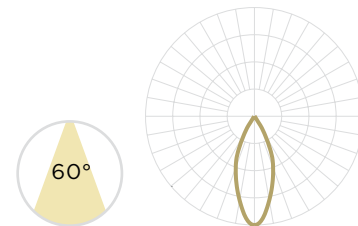

### OUTPUT


DISTANCE		BEAM DIAMETER		OUTPUT	
6	1.8	6.9	2.10	53.3	573.6
8	2.4	9.2	2.80	30.0	322.6
10	3.0	11.5	3.51	19.2	206.5
12	3.7	13.9	4.24	13.3	143.4
14	4.3	16.2	4.94	9.8	105.4
16	4.9	18.5	5.64	7.5	80.7
16	4.9	18.5	5.64	13.6	146.7

## COMPATIBLE HOUSINGS

---


### NON-INSULATED/FRAME IN

D4X-FD-R  
3 Series  
L 10.5" W 7.75" H 5.5"  
L 267mm W 197mm H 140mm




### INSULATED AIRTIGHT

D4X-IC1A-R  
3 Series  
L 22.5" W 8.5" H 5.875"  
L 572mm W 216mm H 150mm




D4X-IC2A-R  
3 Series  
L 13.75" W 10.875" H 8.125"  
L 350mm W 277mm H 207mm




### NEW CONSTRUCTION PLATE

R4P-F-R  
3 Series  
L 6.5" W 6.375" H 1"  
L 166mm W 162mm H 26mm




### REMODEL DRIVER

DRX  
3 Series  
L 8.25" W 3.25" H 2.75"  
L 210mm W 83mm H 70mm



### EMERGENCY HOUSING

D4X-FDEM-R  
3 Series  
L 13.75" W 10.875" H 5.5"  
L 350mm W 277mm H 140mm



## CERTIFICATIONS

---

