



Legacy Downlights

2-125-TL | Standard LED

Trimless Deep Aurora

Deep Aurora provides an excellent cutoff where occupants require glare-free downlighting. The smaller lumen packages are highly effective in low mounting heights, while the larger packages supply efficient illumination from high ceilings.

FEATURES

- Damp location listed
- Ø 3 3/8" [86mm] Aperture
- 2 1/4" lamp regression above the ceiling plane for excellent glare control
- Clear media standard
- Accepts up to 2 media
- Die-cast aluminum fixture
- Powder coated and plated trim ring finishes
- Trim clips designed for 5/8" ceiling thickness

LISTINGS




California
Title 24 JA8




Warm
Dimming

DIMENSIONS

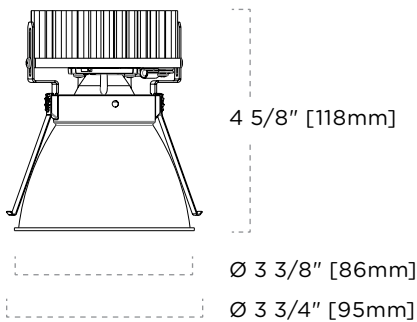

WARM DIMMING METRICS

Warm Dimming — MR16 Halogen

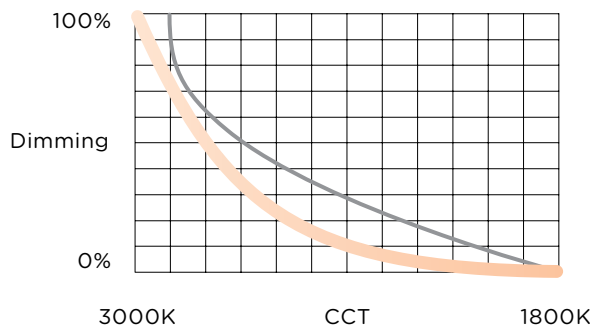

PERFORMANCE SUMMARY

Color Accuracy (SDCM)	<3	
L70 Estimate (h)	50,000	
Color Rendering (CRI)	80	90
Lumen Series	3	
Source Lumens	1000	800
LED Wattage	9	9
California Title 24 Compliant		

PERFORMANCE SUMMARY—WARM DIMMING

Color Rendering (CRI)	95
Lumen Series	3
Source Lumens	1000
LED Wattage	12
California Title 24 Compliant	


REFLECTOR FINISHES

- Black Open
- Nickel Satin
- Silver Satin
- White Open

COLOR TEMPERATURES

- 3000K-1800K (Warm Dim)
- 2700K
- 3000K
- 3500K
- 4000K

BEAM SPREADS



Legacy Downlights

2-125-TL | Standard LED

Trimless Deep Aurora



TAG TYPE

--	--	--	--	--	--

ORDER FORM

1	2	3	4	5	6

1. TRIM

2-125-TL Trimless Deep Aurora

2. REFLECTOR FINISH

BLO Black Open

NICS Nickel Satin

SAS Satin Silver

WHO White Open

3. MODULE & BEAM SPREAD

BRO20 20° Beam

BRO28 28° Beam

BRO40 40° Beam

4. COLOR TEMPERATURE

27 2700K

30 3000K

35 3500K

40 4000K

3018 3000-1800K (Warm Dim)¹

5. CRI, LUMENS, SERIES

8010 80 CRI, 1000lm, 3 Series

9008 90 CRI, 800lm, 3 Series

9510 95 CRI, 1000lm, 3 Series

(Warm Dim)¹

6. OPTIONAL MEDIA (2 MAXIMUM)

EL Elongating

FRO Frosted

HC Honeycomb

PER Perimeter Frosted

SL Solite Softening

SPDL Spread

NOTES

1 3018 warm dim color temperature is only available in 9510 CRI, Lumens Series.

PHOTOMETRIC DATA

CONVERSION CHART

CRI	LUMENS	CCT / MULTIPLIER				TYPICAL SYSTEM POWER
		2700K	3000K	3500K	4000K	
80	1000	0.96	1 (Baseline)	1.04	1.06	12W
90	800	0.77	0.82	—	—	12W

3 SERIES, 20° BEAM, 3000K, 80 CRI, 1000 LUMENS

Report: L071501504
 Trim Model: 2-125-TL-01-SAS-BRO20-30-8010
 Efficacy: 74lm/W
 System Power: 11.5 W
 Lumen: 854lm



OUTPUT

DISTANCE		BEAM DIAMETER		OUTPUT	
FT	M	FT	M	FC	LUX
6	1.8	2.4	0.73	96.0	1033.0
8	2.4	3.1	0.95	54.0	581.1
10	3.0	3.9	1.19	34.6	371.9
12	3.7	4.7	1.43	24.0	258.3
14	4.3	5.5	1.68	17.6	189.7
16	4.9	6.3	1.92	13.5	145.3

3 SERIES, 28° BEAM, 3000K, 80 CRI, 1000 LUMENS

Report: L071501504
 Trim Model: 2-125-TL-01-SAS-BRO28-30-8010
 Efficacy: 74lm/W
 System Power: 11.5 W
 Lumen: 854lm





OUTPUT

DISTANCE		BEAM DIAMETER		OUTPUT	
FT	M	FT	M	FC	LUX
6	1.8	3.0	0.91	75.3	810.0
8	2.4	4.0	1.22	42.3	455.6
10	3.0	5.0	1.52	27.1	291.6
12	3.7	6.0	1.83	18.8	202.5
14	4.3	7.0	2.13	13.8	148.8
16	4.9	8.0	2.44	10.6	113.9

3 SERIES, 40° BEAM, 3000K, 80 CRI, 1000 LUMENS

Report: L041507603
 Trim Model: 2-125-TL-01-SAS-BRO40-30-8010
 Efficacy: 65lm/W
 System Power: 11.6 W
 Lumen: 754lm




OUTPUT

DISTANCE		BEAM DIAMETER		OUTPUT	
FT	M	FT	M	FC	LUX
6	1.8	5.1	1.55	56.8	611.4
8	2.4	6.8	2.07	32.0	343.9
10	3.0	8.5	2.59	20.5	220.1
12	3.7	10.2	3.11	14.2	152.9
14	4.3	11.9	3.63	10.4	112.3
16	4.9	13.6	4.15	8.0	86.0

COMPATIBLE HOUSINGS—TRIMLESS & WOOD TRMLESS


NON-INSULATED/FRAME IN

D4B-FD-R
 3, Series
 L 10.5" W 7.75" H 5.5"
 L 267mm W 197mm H 140mm




NEW CONSTRUCTION PLATE

R4P-F-R
 3 Series
 L 6.5" W 6.375" H 1"
 L 166mm W 162mm H 26mm




INSULATED AIRTIGHT

D4B-IC1A-R
 3 Series
 L 22.5" W 8.5" H 5.875"
 L 572mm W 216mm H 150mm




REMODEL DRIVER

DRB
 3 Series
 L 8.25" W 3.25" H 2.75"
 L 210mm W 83mm H 70mm




D4B-IC2A-R
 3 Series
 L 13.75" W 10.875" H 8.125"
 L 350mm W 277mm H 207mm



CHICAGO PLENUM


D4B-CP-R
 3 Series
 L 13.75" W 10.875" H 4.5"
 L 350mm W 277mm H 115mm



COMPATIBLE HOUSINGS—TRIMLESS ONLY

EMERGENCY HOUSING

D4B-FDEM-R
 3 Series
 L 13.75" W 10.875" H 5.5"
 L 350mm W 277mm H 140mm



CERTIFICATIONS

