

LED PIPE™

1" Pendant | Premium LED

Our LED Pipe™ family of cylinders provide architects and lighting designers with almost limitless design possibilities. Whether you need to light a space with inaccessible ceilings, disappear among the pipes and ducts of an open-ceiling design, focus attention on a specific architectural detail or make a dramatic statement, you can solve almost any lighting problem with a LED Pipe™.



Downlight



LED PIPE™

1" Pendant | Standard LED

RATINGS



Damp
Location

CERTIFICATIONS



Intertek



5yr. Warranty

FEATURES

- Ø 1" [25mm] Aperture
- Fixed pendant available
- Cord mount
- Extruded aluminum cylinder body
- Machine aluminum components
- Powder coated finishes
- Designed for 0.06" - 1.25" ceiling thickness

FINISHES



Anthracite
Metallic




Espresso
Metallic



Glimmer
Gold



Ink Black
Metallic



Nano
White



Slate Grey
Metallic




Terra
Metallic

WIRE COLORS (BRAIDED)




Clear
Metallic


COLOR TEMPERATURES




2700K



3000K



3500K



4000K

BEAM SPREADS



12°



22°



46°

PERFORMANCE SUMMARY

Color Accuracy (SDCM)	<3
L70 Estimate (h)	50,000
Color Rendering (CRI)	90
Lumen Series	—
Source Lumens	180
LED Wattage	2

1" Pendant | Standard LED | Remote Driver | Order Form

Order Code Example: C1P-R-6-21-21-L12-27-9002-RT-DTM-700-1-A-LE-120

PRODUCT NOTES:

1. CIP comes with 48" cord length standard. For additional cord length consult factory.
2. Remote driver ordered separately.
3. Refer to remote driver compatibility chart.
4. LE & S dimmings are only available in 120 voltage.

SELECT A CYLINDER

[1] CYLINDER

C1P 1" Fixed Pendant¹

[2] CYLINDER SHAPE

R Round

[3] LAYOUT

- 6** 6" Cylinder Length
- 12** 12" Cylinder Length

[4] FINISH

- 21** Nano White
- 23** Anthracite Metallic
- 24** Ink Black Metallic
- 25** Slate Grey Metallic
- 26** Espresso Metallic
- 27** Terra Metallic
- 28** Glimmer Gold
- CC** Custom Color

[5] REFLECTOR FINISH

- 21** Nano White
- 23** Anthracite Metallic
- 24** Ink Black Metallic
- 25** Slate Grey Metallic
- 26** Espresso Metallic
- 27** Terra Metallic
- 28** Glimmer Gold
- CC** Custom Color

[6] MODULE & BEAM SPREAD

- L12** 12° Beam
- L22** 22° Beam
- L46** 46° Beam

[7] COLOR TEMPERATURE

- 27** 2700K
- 30** 3000K
- 35** 3500K
- 40** 4000K

[8] LUMENS SERIES

9002 90 CRI, 180lm

[9] DIMMING

RT Remote Driver¹

SELECT A DRIVER

[10] DRIVER

DTM Remote Driver

[11] LUMEN SERIES

700 700mA constant current output

[12] CHANNEL

1 1 Channel

[13] CONFIGURATION²

- A** Configuration A
- B** Configuration B


[14] DIMMING

- LE** Lutron Hi-lume Forward Phase 2-wire Dimming (1%)³
- LH** Lutron Hi-lume EcoSystem Soft-on Fade-to-Black (1%)
- P** 0-10V Dimming (10%)
- P1** 0-10V Dimming (1%)
- S** ELV Dimming (10%)³

[15] VOLTAGE


- 120** 120V
- 277** 277V

1" FIXED PENDANT CYLINDER DIMENSIONS

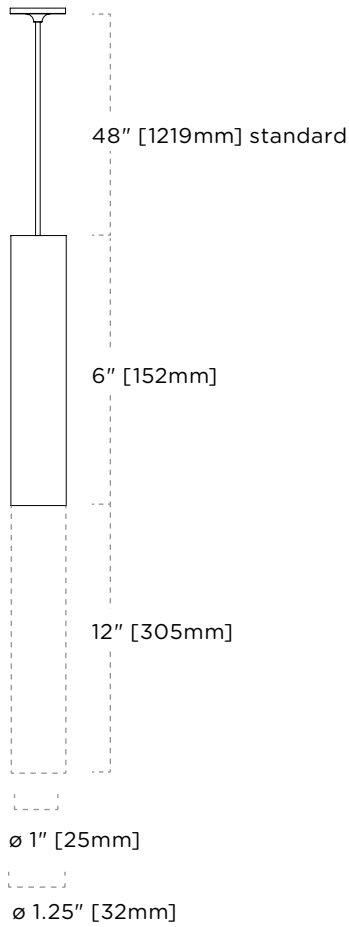

DRIVER SPECIFICATIONS

REMOTE DRIVER DIMENSIONS

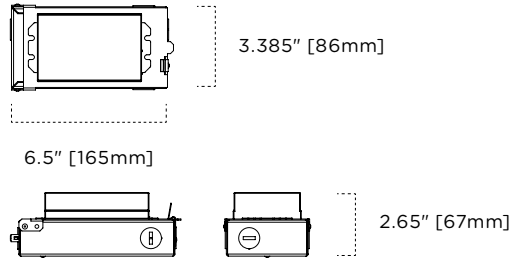

REMOTE DRIVER COMPATIBILITY

DRIVER TYPE	SERIES	CH.	CONFIG.	*Dimming Type ^{1,2}	MIN LOAD UNITS	MAX LOAD UNITS
DTM	700	1	A	LE	3	6
				LH	4	7
				P	6	9
				P1	1	12
			B	S	6	9
				LE	6	12
				LH	8	12
				P	8	12
S	8	12				

*Maximum remote mounting distance (Wire length).

1 LE, LH : 100' using 12 AWG, 50' using 14 AWG.

2 P, P1, S : 100' using 14 AWG, 50' using 16 AWG.