

LED PIPE™

1" Pendant | Standard LED

Our LED Pipe™ family of cylinders provide architects and lighting designers with almost limitless design possibilities. Whether you need to light a space with inaccessible ceilings, disappear among the pipes and ducts of an open-ceiling design, focus attention on a specific architectural detail or make a dramatic statement, you can solve almost any lighting problem with a LED Pipe™.



Downlight



LED PIPE™

1" Pendant | Standard LED

RATINGS



Damp
Location

CERTIFICATIONS



Intertek



5yr. Warranty

FEATURES

- Ø 1" [25mm] Aperture
- Fixed pendant available
- Cord mount
- Extruded aluminum cylinder body
- Machine aluminum components
- Powder coated finishes
- Designed for 0.06" - 1.25" ceiling thickness

FINISHES



Anthracite
Metallic



Chocolate
Metallic




Glimmer
Gold



Ink Black
Metallic



Moroccan
Metallic



Nano
White



Sienna
Metallic




Slate Grey
Metallic

WIRE COLORS (BRAIDED)




Clear
Metallic


COLOR TEMPERATURES




2700K



3000K



3500K



4000K

BEAM SPREADS



12°



22°



46°

PERFORMANCE SUMMARY

Color Accuracy (SDCM)	<3
L70 Estimate (h)	50,000
Color Rendering (CRI)	90
Lumen Series	—
Source Lumens	220
Delivered Lumens	180
LED Wattage	2

1" Pendant | Standard LED | Remote Driver | Order Form

Order Code Example: C1P-R-6-21-21-L12-27-9002-RT-DTM-700-1-A-P-120

PRODUCT NOTES:

1. C1P comes with 48" cord length standard. For additional cord length consult factory.
2. Remote driver ordered separately.
3. Refer to remote driver compatibility chart.
4. S dimming is only available in 120 voltage.
5. 347 voltage is only available with P dimming

SELECT A CYLINDER

[1] CYLINDER

C1P 1" Fixed Pendant¹

[2] CYLINDER SHAPE

R Round

[3] LAYOUT

6 6" Cylinder Length
12 12" Cylinder Length

[4] FINISH

21 Nano White
23 Anthracite Metallic
24 Ink Black Metallic
25 Slate Grey Metallic
28 Glimmer Gold
31 Sienna Metallic
32 Moroccan Metallic
34 Chocolate Metallic
CC Custom Color

[5] REFLECTOR FINISH

21 Nano White
23 Anthracite Metallic
24 Ink Black Metallic
25 Slate Grey Metallic
28 Glimmer Gold
31 Sienna Metallic
32 Moroccan Metallic
34 Chocolate Metallic
CC Custom Color

[6] MODULE & BEAM SPREAD

L12 12° Beam
L22 22° Beam
L46 46° Beam

[7] COLOR TEMPERATURE

27 2700K
30 3000K
35 3500K
40 4000K

[8] LUMENS SERIES

9002 90 CRI, 180lm

[9] DIMMING

RT Remote Driver²

SELECT A DRIVER

[10] DRIVER

DTM Remote Driver

[11] LUMEN SERIES

700 700mA constant current output

[12] CHANNEL

1 1 Channel

[13] CONFIGURATION³

A Configuration A
B Configuration B


[14] DIMMING

D Dali-2 (1%)
LH Lutron Hi-lume EcoSystem
Soft-on Fade-to-Black (1%)
P 0-10V Dimming (1%)
P1 0-10V Dimming (1%)
S Phase Dimming (1%)⁴

[15] VOLTAGE


120 120V
277 277V
347 347V

1" FIXED PENDANT CYLINDER DIMENSIONS

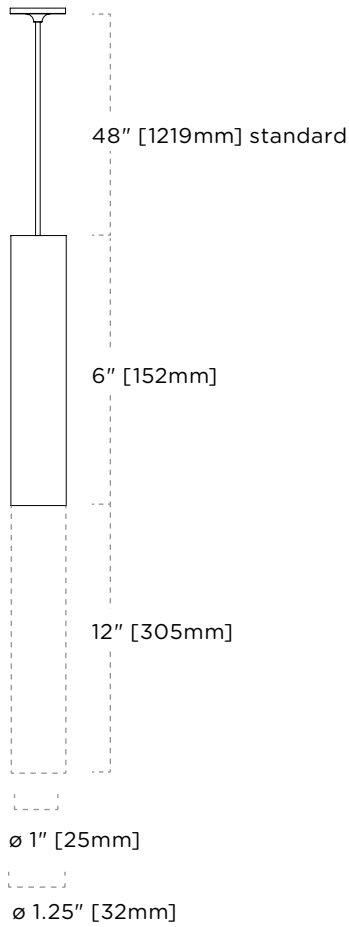

DRIVER SPECIFICATIONS

REMOTE DRIVER DIMENSIONS

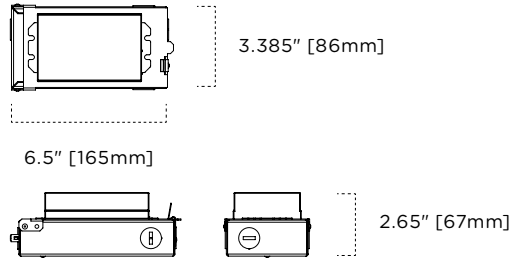

REMOTE DRIVER COMPATIBILITY

DRIVER TYPE	SERIES	CH.	CONFIG.	*Dimming Type ^{1,2}	MIN LOAD UNITS	MAX LOAD UNITS
DTM	700	1	A	D	1	12
				LH	4	7
				P	3	12
				P1	1	12
			S	6	9	
			B	LH	8	12
				P	8	12
S	8	12				

*Maximum remote mounting distance (Wire length).

- LH : 100' using 12 AWG, 50' using 14 AWG.
- D, P, P1, S : 100' using 14 AWG, 50' using 16 AWG.