LED PIPE™

LED PIPE CYLINDER C2WRD & UD WALL MOUNT DOWN & UP/DOWN INTEGRAL/REMOTE DRIVER

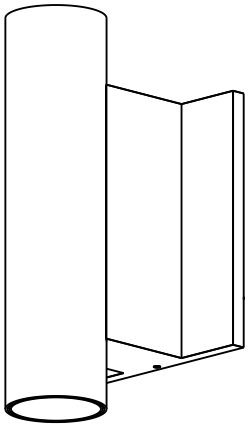

This product must be installed in accordance with the applicable code by a person familiar with the construction and operation of the product and the hazards involved. Read all of these instructions before installing.

WARNING: Disconnect power prior to servicing or installing.

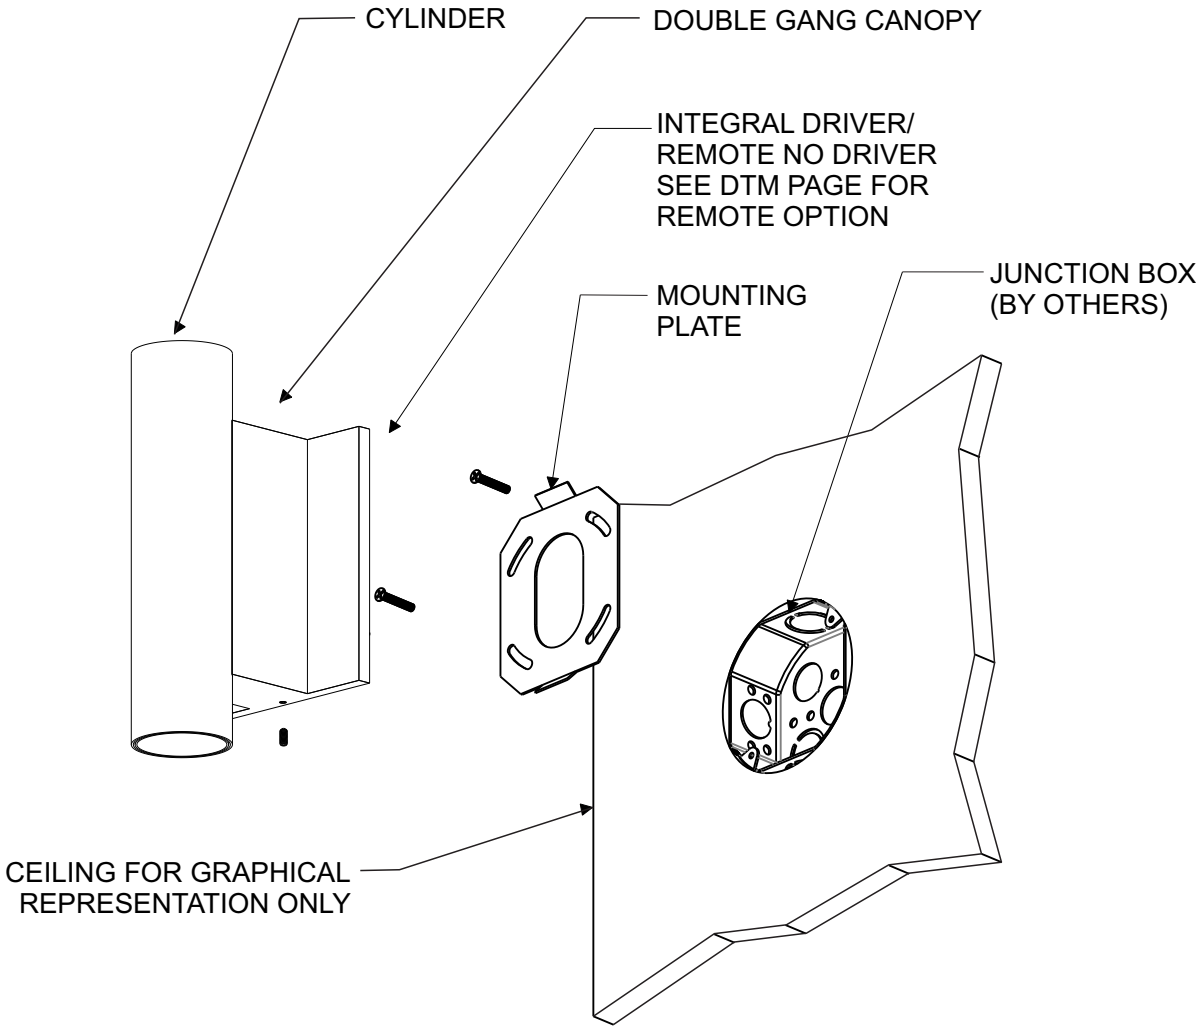

info@lightheadedlighting.com . www.lightheadedlighting.com
P. 604.464.5644 T. 1.800.464.9544 F. 604.464.0888

Intertek

LIGHTHEADED™

LED PIPE™

LED PIPE CYLINDER C2WRD & UD WALL MOUNT DOWN & UP/DOWN INTEGRAL/REMOTE DRIVER

1

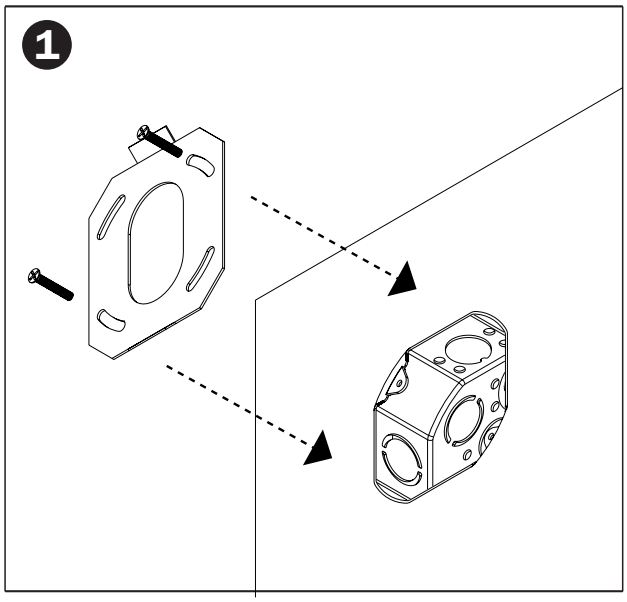

Fasten mounting plate to junction box (by others) with supplied fasteners.

2

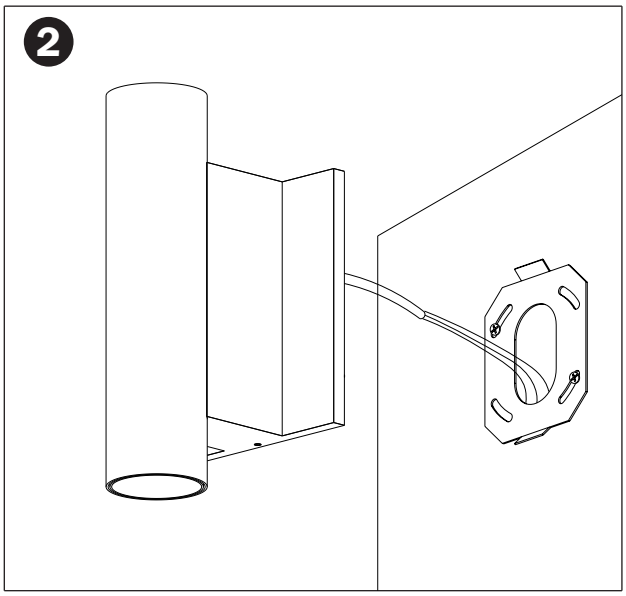

Make supply connections. Check with wiring diagrams.

3

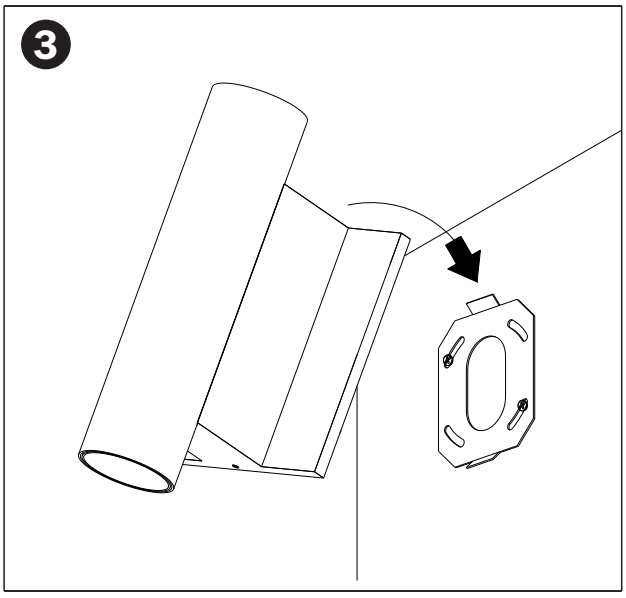

Attach cylinder and canopy to rest on the top tab of the mounting plate.

4

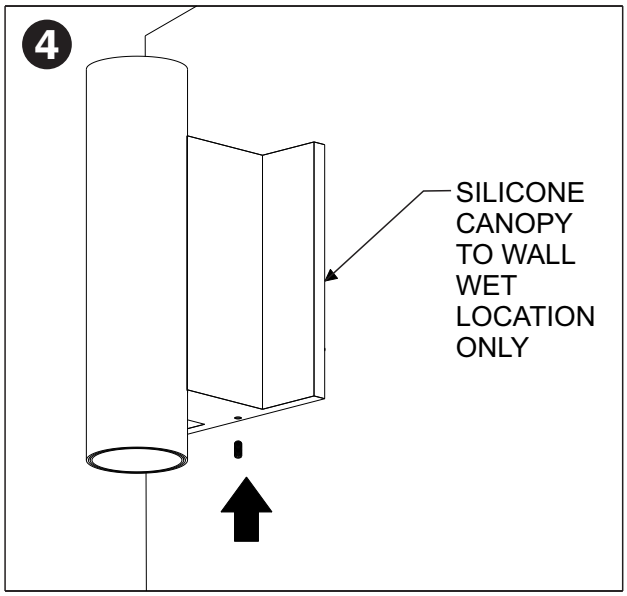

Fasten canopy to bottom tab of the mounting plate with the set screw. Silicone canopy to wall for wet location only.

info@lightheadedlighting.com . www.lightheadedlighting.com
P. 604.464.5644 T. 1.800.464.9544 F. 604.464.0888

Intertek

LIGHTHEADED™

LED PIPE™

LED PIPE CYLINDER C2WRD & UD WALL MOUNT DOWN & UP/DOWN INTEGRAL/REMOTE DRIVER

5

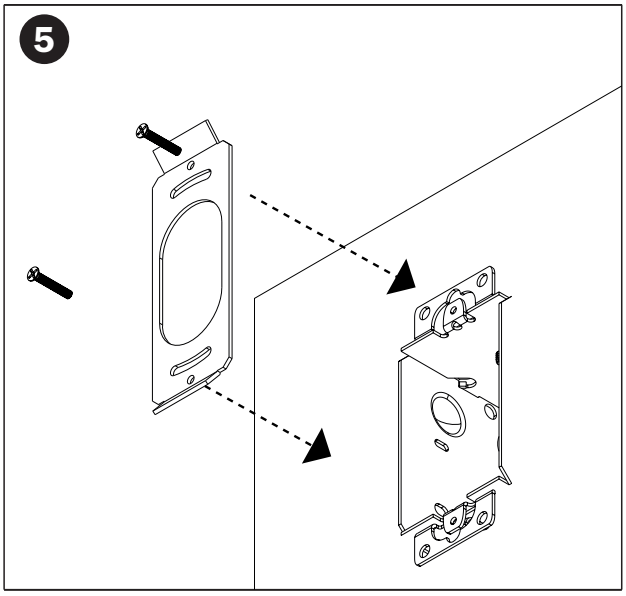

Fasten mounting plate to junction box (by others) with fasteners (by others).

6

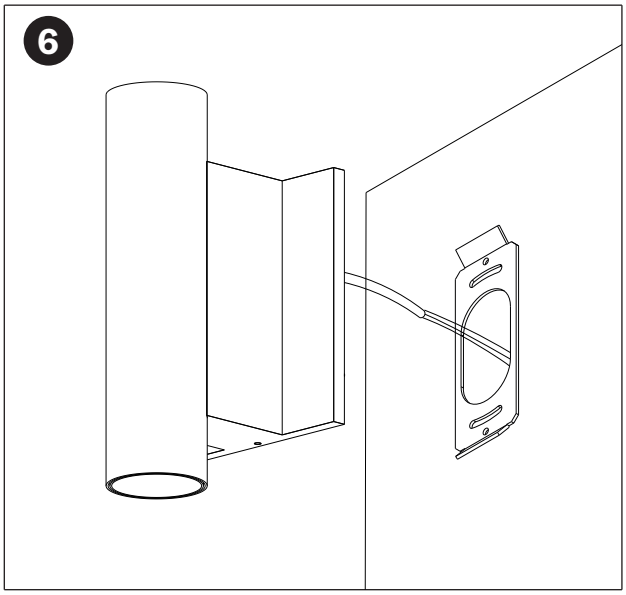

Make supply connections. Check with wiring diagrams.

7

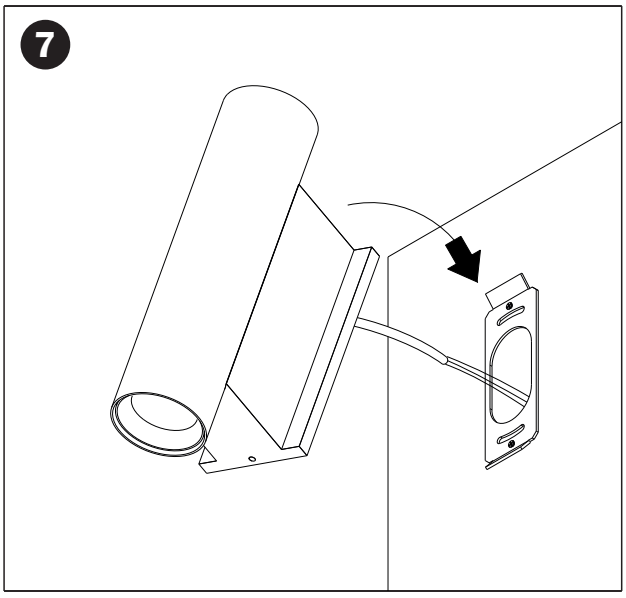

Attach cylinder and canopy to rest on the top tab of the mounting plate.

8

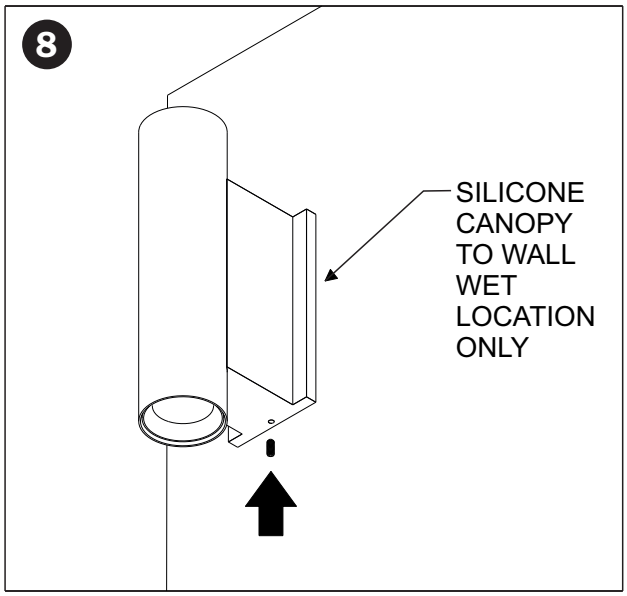

Fasten canopy to bottom tab of the mounting plate with the set screw. Silicone canopy to wall for wet location only.

info@lightheadedlighting.com . www.lightheadedlighting.com
P. 604.464.5644 T. 1.800.464.9544 F. 604.464.0888

Intertek

LIGHTHEADED™

LED PIPE™

LED PIPE CYLINDER
C2WRD & UD
WALL MOUNT
DOWN & UP/DOWN C2

REFLECTOR + LENS SERVICE (DAMP LOCATION)

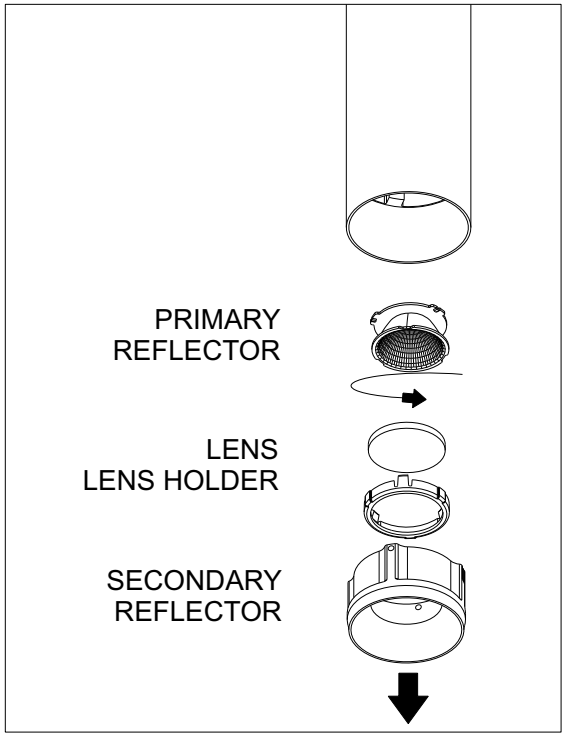

To service or change the reflector and lens, pull the secondary reflector down to release it from magnets.
If lens is installed, rotate lens holder until holder and lens drop out. Then rotate the primary reflector 45° counter clockwise to release.

REFLECTOR SERVICE (WET LOCATION)

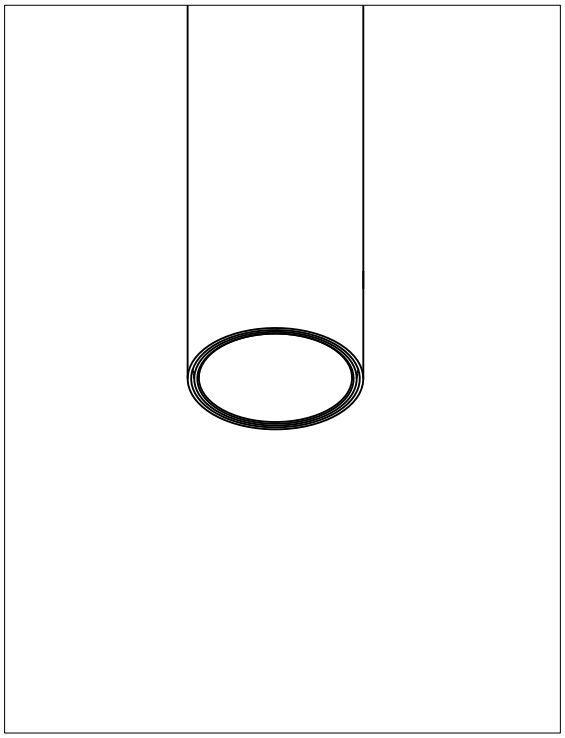

Contact factory for servicing wet location.

info@lightheadedlighting.com . www.lightheadedlighting.com
P. 604.464.5644 T. 1.800.464.9544 F. 604.464.0888

Intertek

LIGHTHEADED™

LED PIPE™

LED PIPE CYLINDER INTEGRAL WIRING

This product must be installed in accordance with the applicable code by a person familiar with the construction and operation of the product and the hazards involved.

0-10V (P) , 0-10V (P1) & 0-10V (P0) DIMMING

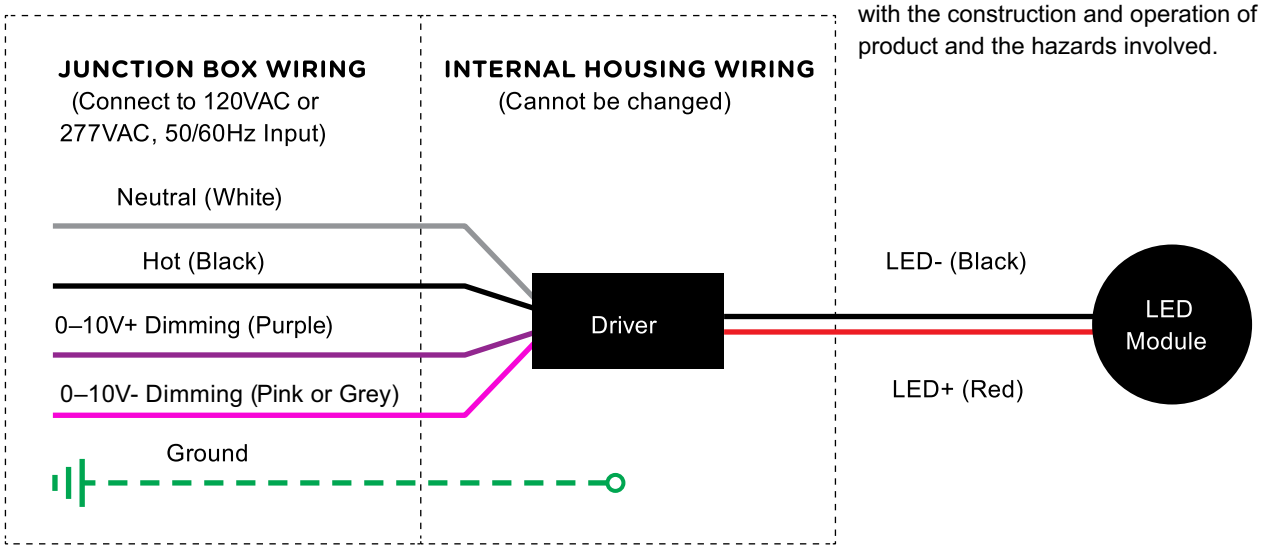

PHASE (S) DIMMING

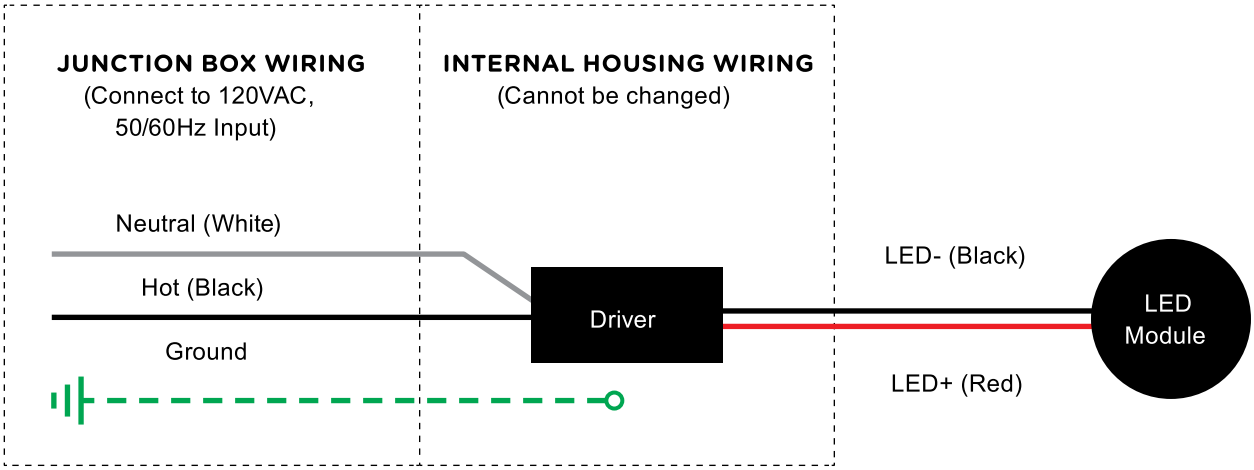

WARNING

TURN OFF POWER before connecting LED product. Failure to do so will cause IMMEDIATE LED FAILURE.

info@lightheadedlighting.com . www.lightheadedlighting.com
P. 604.464.5644 T. 1.800.464.9544 F. 604.464.0888

Intertek

LIGHTHEADED™

LED PIPE™

LED PIPE CYLINDER INTEGRAL WIRING

This product must be installed in accordance with the applicable code by a person familiar with the construction and operation of the product and the hazards involved.

LUTRON ECOSYSTEM (LH) DIMMING

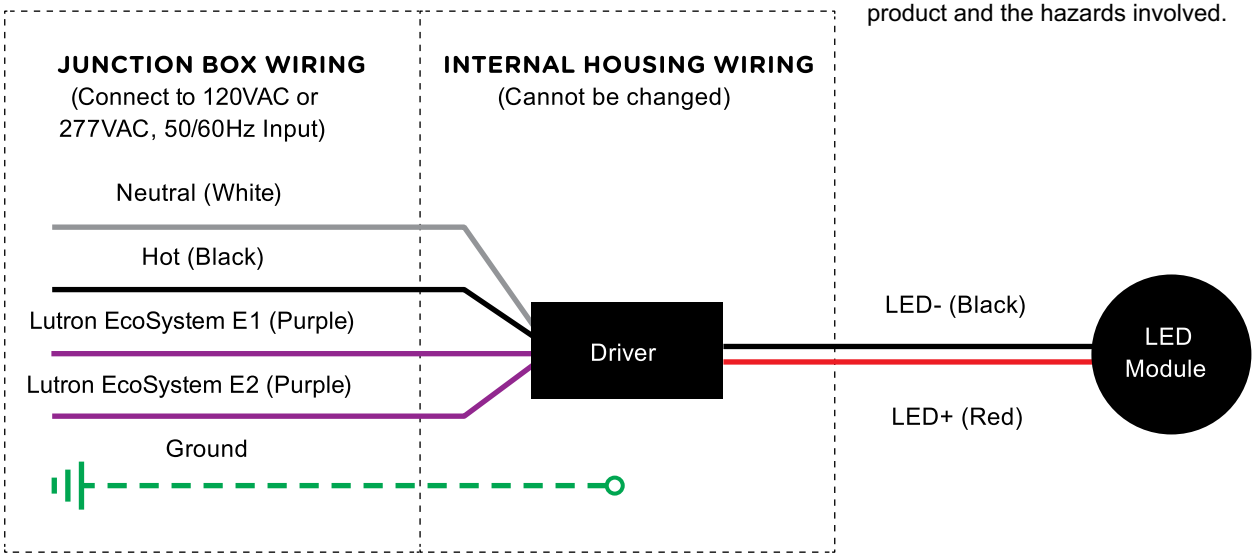

DALI (D) DIMMING

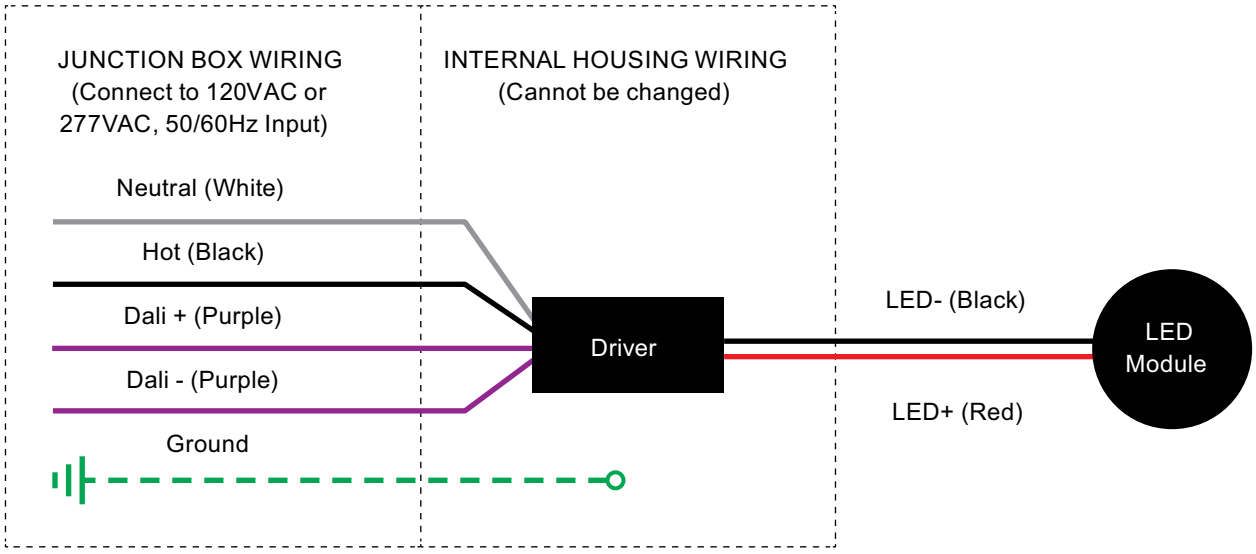

WARNING

TURN OFF POWER before connecting LED product. Failure to do so will cause IMMEDIATE LED FAILURE.

info@lightheadedlighting.com . www.lightheadedlighting.com
P. 604.464.5644 T. 1.800.464.9544 F. 604.464.0888

Intertek

LIGHTHEADED™

LED PIPE

LED PIPE CYLINDER DTM REMOTE DRIVER CASE

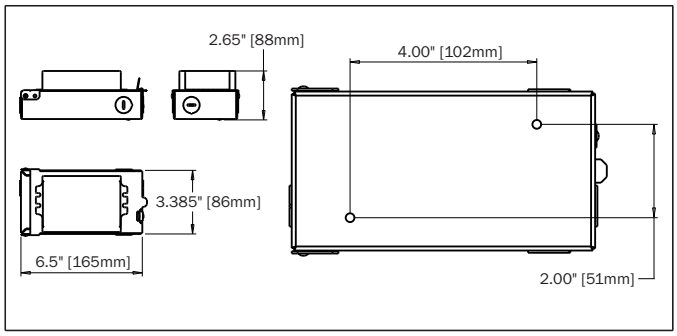

Mounting dim's for remote driver case. Mounting holes on bottom of case opposite to driver.

Caution: Ensure Driver is switched **OFF** before connecting LED. Failure to do so will cause **IMMEDIATE LED FAILURE**.

CAUTION TO INSTALLER: This LED device is polarity sensitive and must be wired in series. Mating connectors can only be wired in series, factory made jumper with connectors available if necessary.

Wiring must be connected as noted in diagrams below. Failure to follow instruction provided will result in damage to luminaire.

- Rated for non-insulated ceilings only
- Certified as stand alone luminaire
- For use with approved LED Drivers, refer to LED driver specification sheets for compatibility and dimming

DALI/LH-UNV

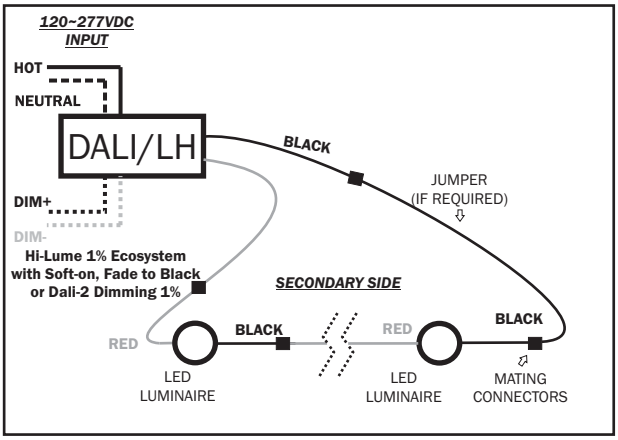

P/P0/P1-UNV

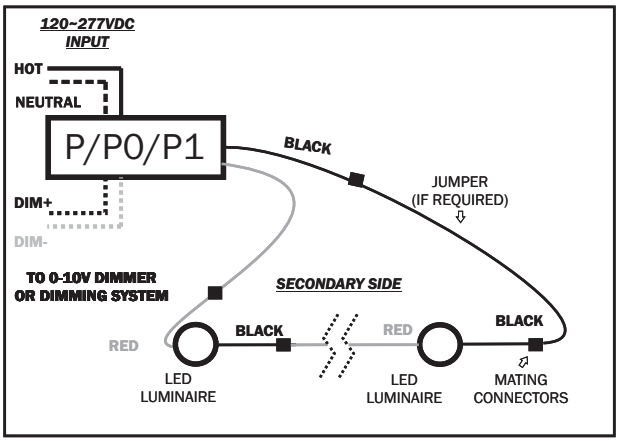

S-120

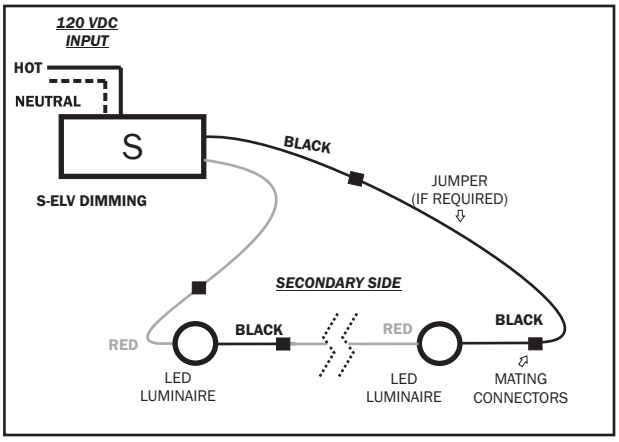

info@lightheadedlighting.com . www.lightheadedlighting.com
P. 604.464.5644 T. 1.800.464.9544 F. 604.464.0888

Intertek

LIGHTHEADED™