



2" | Standard LED

Our 2" Purist™ downlights combine superior performance and low glare in a timeless design. They represent incredible value, pure and simple.

FIXED TRIMS




ADJUSTABLE TRIMS



WALL WASH TRIMS



PINHOLE TRIMS

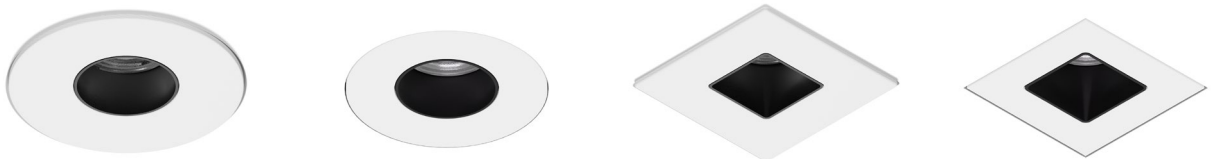

MULTIPLES



PURIST

2" | Standard LED

LISTINGS



Damp Location



Wet Location



Warm Dimming



California Title 24 JA8

CERTIFICATIONS



Intertek




5yr. Warranty

FEATURES

- (Ø) 2" [51mm] Aperture
- (Ø) 1.25" [32mm] Pinhole Aperture
- Damp location listed, select wet location options
- 25° Tilt with Adjustable trim types
- Ideal spacing 24" on center and 18" away from the wall with Wall Wash trims
- Rated for insulated airtight and non insulated ceilings
- Aluminum body
- Powder coated finishes
- Trim clips designed for up to 0.875" ceiling thickness
- Powered by a remodel or remote drivers (sold separately)

FLANGE & REFLECTOR FINISHES



White




Black



Bronze



Matte Nickel



Matte Silver

BEAM SPREADS (LXX)



15°



30°



50°



65°



Wall Wash

BEAM SPREADS (BXX)



25°



36°



55°



Wall Wash

COLOR TEMPERATURES




2700K



3000K



3500K



4000K



Warm Dim

PERFORMANCE SUMMARY

Color Accuracy (SDCM)	<3	
L70 Estimate (h)	50,000	
Color Rendering (CRI)	80	90
Lumen Series (2)	8008	9007
Source Lumens	800	700
Delivered Lumens	675	575
LED Wattage	6	6
Lumen Series (3)	8011	9010
Source Lumens	1100	1000
Delivered Lumens	875	750
LED Wattage	8.5	8.5
Lumen Series (4)	8015	9013
Source Lumens	1500	1300
Delivered Lumens	1175	1000
LED Wattage	13	13
Lumen Series (5)	8018	9014
Source Lumens	2450	2075
Delivered Lumens	1700	1425
LED Wattage	18	18
Lumen Series (7)	8023	9018
Source Lumens	3275	2750
Delivered Lumens	2275	1925
LED Wattage	25	25

PERFORMANCE SUMMARY—WARM DIMMING

Color Rendering (CRI)	95
Lumen Series (1)	9510
Source Lumens	1000
Delivered Lumens	750
LED Wattage	12


*Delivered lumens are based on round fixed trim, 3000K color temperature with 30° beam for 2, 3 and 4 lumen series and 55° beam angle for 1, 5 and 7 lumen series.

* Refer to IES files for individual product information.

* Consult factory for additional lower lumen options.

WARM DIMMING METRICS

— Warm Dimming — MR16 Halogen

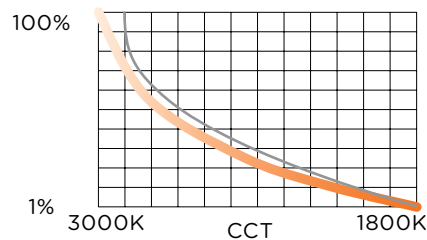

PURIST

2" | Standard LED | Remodel Driver | Order Form

PRODUCT NOTES:

1. Pinhole trim reflector finish painted black standard. No reflector finish selection required.
 2. Requires one remodel driver per lamp, unavailable in 8023, 9018, 8018, 9014.
 3. T2SF-2 and T2SF-3 are not available with CL or F Glass wet location option.
 4. CC custom color requires factory consultation.
 5. CL and F glass is mounted to trim and is wet location listed when selected.
 6. CL and F glass is not available with T2RP and T2SP. Also LWW and BWW wall wash module and beam spreads.
 7. L15, L30, L50, L65, LWW beam angles are only available with Lumen series 8008, 9007, 8011, 9010, 8015 and 9013.
 8. B25, B36, B55, BWW beam angles are only available with Lumen series 9510, 8018, 9014, 8023 and 9018.
 9. LWW and BWW wall wash module and beam spread light engines can only be used with T2RF or T2SF trims.
 10. 3018 warm dim color temperature is only available in 9510 Lumen Series.
 11. Only available in Non-Insulated.
 12. 8023 and 9018 Lumen series are not available with LH dimming. 8023, 9018, 8015 and 9013 are not available with D dimming.
 13. S dimming is only available in 120 voltage.
 14. IC3A and CP3A are only compatible with 2 & 3 series remodel drivers in P or S dimming.
 15. IC4A and CP4A are not compatible with 5 & 7 series remodel drivers and are not compatible with 1 & 4 series drivers with LH dimming.
 16. 1x2 and 1x3 lamp layouts must select Square trim shape housing.
- Wet Location.
 - 3000K-1800K Warm Dimming.
 - Title 24 JA8 qualified, consult factory for complete listing

SELECT A TRIM

[1] TRIM

- T2RA** Round Adjustable ●
- T2RF** Round Fixed ●
- T2RP** Round Pinhole^{1,6}
- T2SA** Square Adjustable ●
- T2SF** Square Fixed ●
- T2SP** Square Pinhole^{1,6}
- T2SF-2** 1x2 Square Fixed Multiple^{2,3}
- T2SF-3** 1x3 Square Fixed Multiple^{2,3}

[2] FLANGE TYPE

- T** Trimmed

[↓] EXCLUDES SF-2, SF-3 TRIMS

- TL** Trimless

[↓] RF, RP, SF, SP TRIMS ONLY

- TLW** Wood Trimless

[3] FLANGE FINISH

- 01** White
- 04** Black
- 05** Matte Silver
- 06** Bronze
- 11** Matte Nickel
- CC** Custom Color⁴

[4] REFLECTOR FINISH

- 01** White
- 04** Black
- 05** Matte Silver
- 06** Bronze
- 11** Matte Nickel
- CC** Custom Color⁴

[↓] RP, SP TRIMS ONLY

- [BLANK]** No Finish

[5] GLASS

- [Blank]** No Lens

[↓] RF, RA, SF, SA TRIMS ONLY

- CL** Clear ●^{5,6}
- F** Frosted ●^{5,6}

[6] MODULE & BEAM SPREAD

- L15** 15° Beam⁷
- L30** 30° Beam⁷
- L50** 50° Beam⁷
- L65** 65° Beam⁷
- B25** 25° Beam⁸
- B36** 36° Beam⁸
- B55** 55° Beam⁸

[↓] RF, SF TRIMS ONLY

- LWW** Wall Wash^{7,9}
- BWW** Wall Wash^{8,9}

[7] COLOR TEMPERATURE

- 27** 2700K
- 30** 3000K
- 35** 3500K
- 40** 4000K
- 3018** 3000-1800K ●¹⁰

[8] LUMENS SERIES

- 9510** 95 CRI, 1000lm ● ●¹⁰
- 8008** 80 CRI, 800lm
- 9007** 90 CRI, 700lm ●
- 8011** 80 CRI, 1100lm
- 9010** 90 CRI, 1000lm ●
- 8015** 80 CRI, 1500lm¹²
- 9013** 90 CRI, 1300lm ●
- 8018** 80 CRI, 2450lm¹¹
- 9014** 90 CRI, 2075lm^{11,12}
- 8023** 80 CRI, 3275lm^{11,12}
- 9018** 90 CRI, 2750lm^{11,12}

SELECT A DRIVER

[9] DRIVER

- DRC-T2** Remodel Driver²

[10] LUMEN SERIES

- 1** 1000 Lumens Max (9510) ●
- 2** 800 Lumens Max (8008, 9007)
- 3** 1100 Lumens Max (8011, 9010)
- 4** 1500 Lumens Max (8015, 9013)
- 5** 1800 Lumens Max (8018, 9014)¹¹
- 7** 2300 Lumens Max (8023, 9018)¹¹

[11] DIMMING

- LH** Lutron Hi-lume EcoSystem Soft-on Fade-to-Black (1%)^{12,15}
- D** Dali-2 Dimming (1%)¹²
- P** 0-10V Dimming (1%)
- S** Phase Dimming (1%)¹³

[12] VOLTAGE

- 120** 120V
- 277** 277V

SELECT A HOUSING

[13] BASEPLATE

- R2P** Purist Baseplate

[14] HOUSING/CEILING

- F** Non-Insulated
- IC3A** Insulated Airtight Type 3 ●¹⁴
- IC4A** Insulated Airtight Type 4 ●¹⁵
- CP3A** Chicago Plenum Type 3¹⁴
- CP4A** Chicago Plenum Type 4¹⁵

[15] TRIM SHAPE

- R** Round
- S** Square

[16] LAYOUT

- [BLANK]** 1x1 Single Lamp
- 2** 1x2 Multiples Lamp^{11,16}
- 3** 1x3 Multiples Lamp^{11,16}

[17] FLANGE TYPE

- T** Trimmed

[↓] EXCLUDES SF-2, SF-3 TRIMS

- TL** Trimless

[↓] RF, RP, SF, SP TRIMS ONLY

- TLW** Wood Trimless

PURIST

2" | Standard LED | Remote Driver | Order Form

PRODUCT NOTES:

1. Pinhole trim reflector finish painted black standard. No reflector finish selection required.
2. T2SF-2 and T2SF-3 are not available with CL or F Glass wet location option.
3. CC custom color requires factory consultation.
4. CL and F glass is mounted to trim and is wet location listed when selected.
5. CL and F glass is not available with LWW and BWW wall wash module and beam spreads.
6. CL and F glass is not available with T2RP and T2SP. Also LWW wall wash module and beam spreads.

7. Refer to remote driver compatibility chart for available configurations and dimming combinations. Wiring between fixture and driver by others..

8. S dimming is only available in 120V voltage.

9. 347V is only available in P dimming

10. Only available in Non-Insulated.

● Wet Location.

● Title 24 JA8 qualified, consult factory for complete listing.

SELECT A TRIM

[1] TRIM

- T2RA Round Adjustable ●
- T2RF Round Fixed ●
- T2RP Round Pinhole^{1,6}
- T2SA Square Adjustable ●
- T2SF Square Fixed ●
- T2SP Square Pinhole^{1,6}
- T2SF-2 1x2 Square Fixed Multiple²
- T2SF-3 1x3 Square Fixed Multiple²

[2] FLANGE TYPE

- T Trimmed

[↓] EXCLUDES SF-2, SF-3 TRIMS

- TL Trimless

[↓] RF, RP, SF, SP TRIMS ONLY

- TLW Wood Trimless

[3] FLANGE FINISH

- 01 White
- 04 Black
- 05 Matte Silver
- 06 Bronze
- 11 Matte Nickel
- CC Custom Color³

[4] REFLECTOR FINISH

- 01 White
- 04 Black
- 05 Matte Silver
- 06 Bronze
- 11 Matte Nickel
- CC Custom Color³

[↓] RP, SP TRIMS ONLY

- [BLANK] No Finish

[5] GLASS

- [Blank] No Lens

[↓] RF, RA, SF, SA TRIMS ONLY

- CL Clear ●^{4,5}
- F Frosted ●^{4,5}

[6] MODULE & BEAM SPREAD

- L15 15° Beam
- L30 30° Beam
- L50 50° Beam
- L65 65° Beam

[↓] RF, SF TRIMS ONLY

- LWW Wall Wash⁶

[7] COLOR TEMPERATURE

- 27 2700K
- 30 3000K
- 35 3500K
- 40 4000K

[8] LUMENS SERIES

- 8008 80 CRI, 800lm
- 9007 90 CRI, 700lm ●
- 8011 80 CRI, 1100lm
- 9010 90 CRI, 1000lm ●

[9] DRIVER

- RT Remote Driver

SELECT A DRIVER

[10] DRIVER

- DTM Remote Driver⁷

[11] LUMEN SERIES

- 500 500mA Constant Current (8008, 9007)
- 700 700mA Constant Current (8011, 9010)

[12] CHANNEL

- 1 1 Channel

[13] CONFIGURATION

- A Configuration A
- B Configuration B

[14] DIMMING

- D Dali-2 Dimming (1%)
- LH Lutron Hi-lume EcoSystem Soft-on Fade-to-Black (1%)
- P 0-10V Dimming (1%)
- P1 eldoLED 0-10V Dimming (1%)
- S Phase Dimming (1%)⁸

[15] VOLTAGE

- 120 120V
- 277 277V
- 347 347V⁹

SELECT A HOUSING

[16] BASEPLATE

- R2P Purist Baseplate

[17] HOUSING/CEILING

- F Non-Insulated
- IC3A Insulated Airtight Type 3 ●
- CP3A Chicago Plenum Type 3

[18] TRIM SHAPE

- R Round
- S Square

[19] LAYOUT

- [BLANK] 1x1 Single Lamp
- 2 1x2 Multiples Lamp¹⁰
- 3 1x3 Multiples Lamp¹⁰

[20] FLANGE TYPE

- T Trimmed

[↓] EXCLUDES SF-2, SF-3 TRIMS

- TL Trimless


[↓] RF, RP, SF, SP TRIMS ONLY

- TLW Wood Trimless


CEILING CUTOUTS

LUMEN SERIES: 9510, 8008, 9007, 8011, 9010, 8015, 9013


TRIMMED ROUND




WOOD / TRIMLESS ROUND




TRIMMED SQUARE




WOOD / TRIMLESS SQUARE



1X2 MULTIPLES



1X3 MULTIPLES





ROUND & SQUARE TRIM DIMENSIONS



LUMEN SERIES: 9510, 8008, 9007, 8011, 9010, 8015, 9013

* Overall height is .43" [11mm] taller when L15 option



ADJUSTABLE

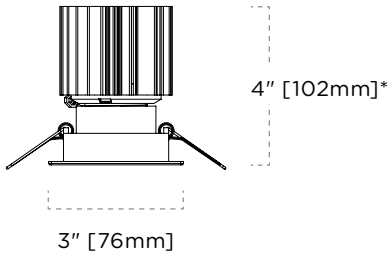



TRIMLESS ADJUSTABLE

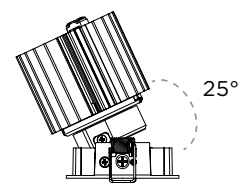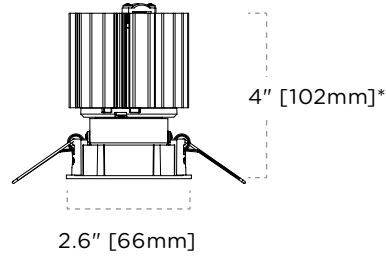


WALL WASH

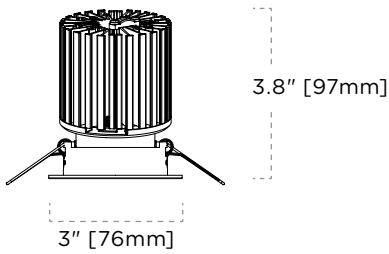


TRIMLESS WALL WASH

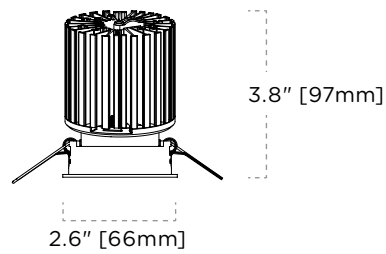


FIXED

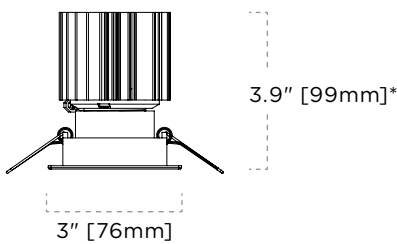


TRIMLESS FIXED

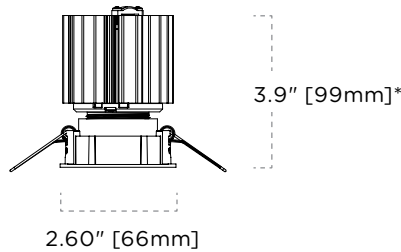


WOOD TRIMLESS FIXED

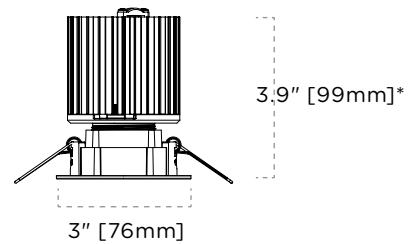


PINHOLE

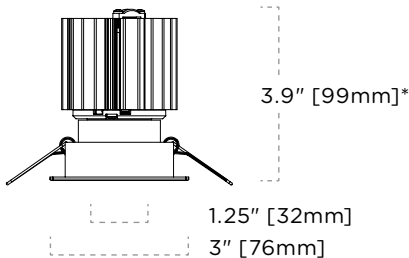

TRIMLESS PINHOLE

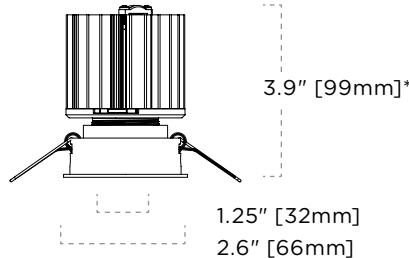


WOOD TRIMLESS PINHOLE

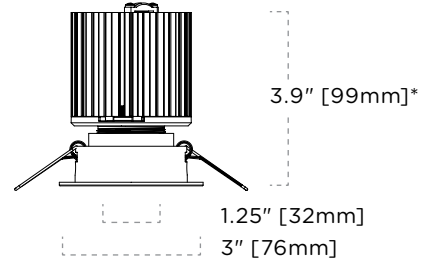


CEILING CUTOUTS

LUMEN SERIES: 8018, 9014, 8023, 9018


TRIMMED ROUND




Wood / Trimless Round



TRIMMED SQUARE





Wood / Trimless Square





ROUND & SQUARE TRIM DIMENSIONS

LUMEN SERIES: 8018, 9014, 8023, 9018



ADJUSTABLE

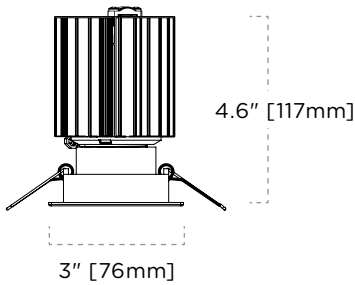



TRIMLESS ADJUSTABLE

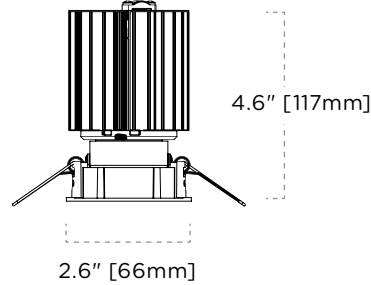


WALL WASH

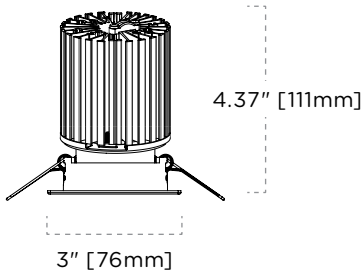


TRIMLESS WALL WASH

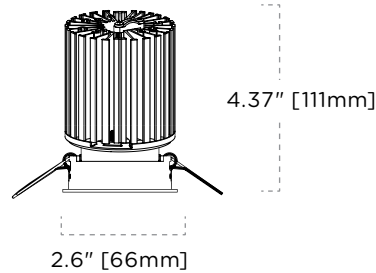


FIXED

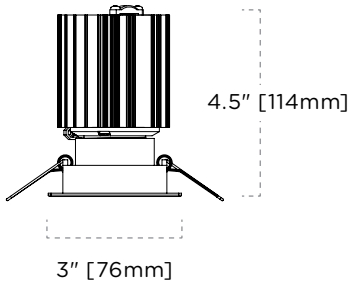


TRIMLESS FIXED

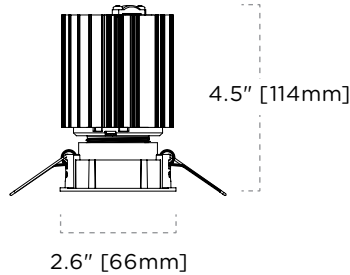


WOOD TRIMLESS FIXED

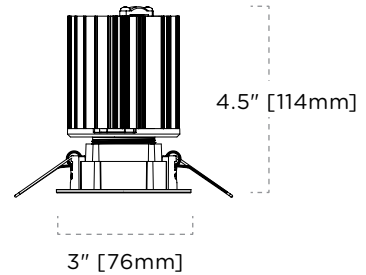


PINHOLE

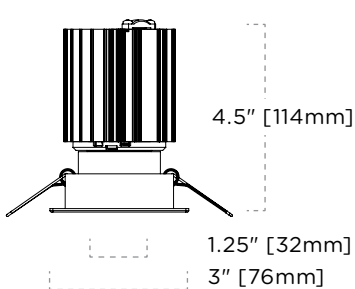

TRIMLESS PINHOLE

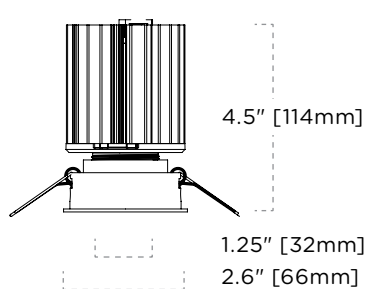


WOOD TRIMLESS PINHOLE

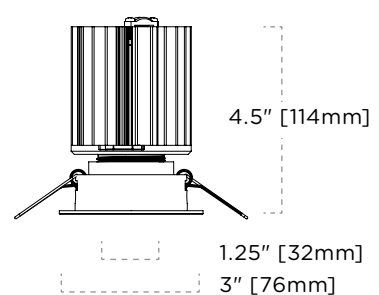


MULTIPLES DIMENSIONS

* Overall height is .43" [11mm] taller when L15 option is selected
 * Lumen Series: 9510, 8008, 9007, 8011, 9010, 8015, 9013

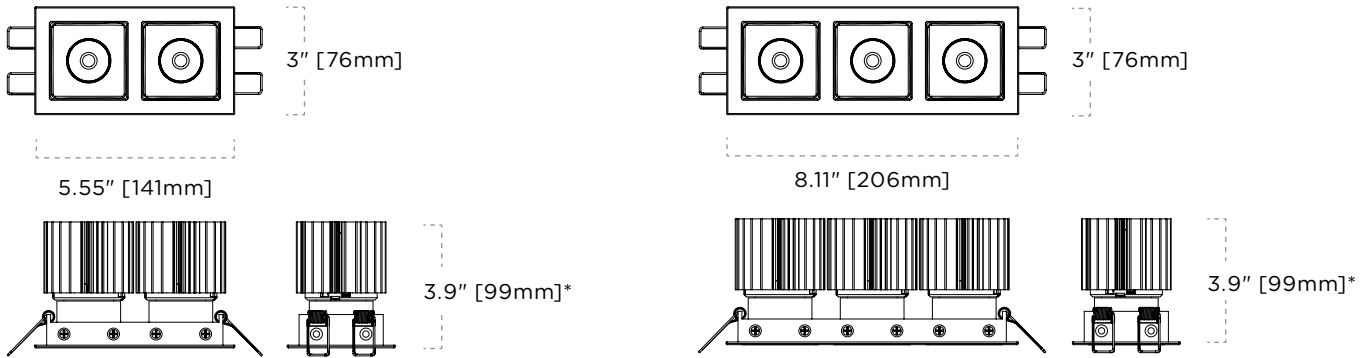


DRIVER DIMENSIONS

REMODEL

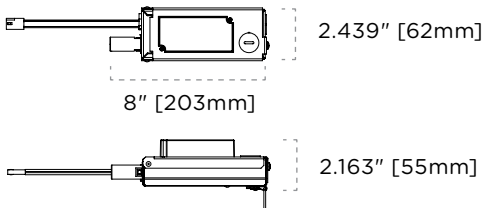

* Minimum Required Plenum Height 5.5" [140mm]

REMOTE DRIVER

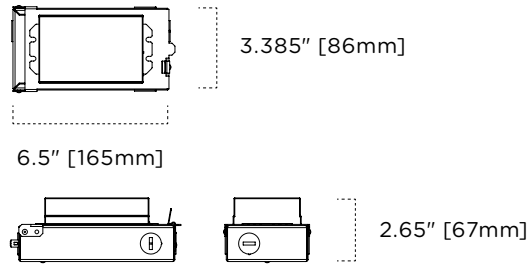

REMOTE DRIVER COMPATIBILITY (PER LAMP)

Trim	Driver Type	Series	CH.	Config.	*Dimming Type ^{1,2}	Min Load Units	Max Load Units	
T2RF	DTM	500	1	A	D	1	3	
T2RA					LH	1	3	
T2RP					P	1	4	
T2SF					P1	1	3	
T2SA				B	S	1	3	
T2SP						1	3	
T2SF-2						2	3	
T2SF-3						3	3	
(8008, 9007)								
T2RF	DTM	700	1	A	D	1	3	
T2RA					LH	1	3	
T2RP					P	1	4	
T2SF					P1	1	3	
T2SA					S	1	1	3
T2SP							1	3
T2SF-2							1	3
T2SF-3							1	3
(8011, 9010)								


*Maximum remote mounting distance (Wire length).

- 1. LE, LH : 100' using 12 AWG, 50' using 14 AWG.
- 2. P, P1, S : 100' using 14 AWG, 50' using 16 AWG.


NON-INSULATED—ROUND & SQUARE HOUSING DIMENSIONS

* Round line art shown. Round & Square housing dimensions are equal.


Non-IC

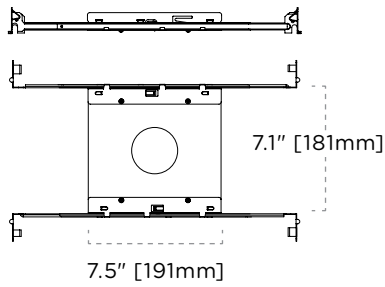


Trimless NON-IC

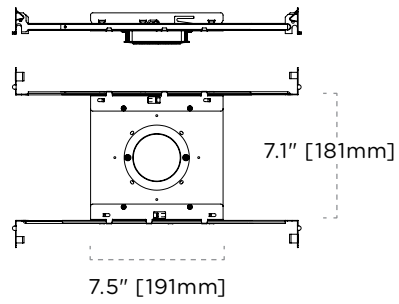


Wood Trimless NON-IC

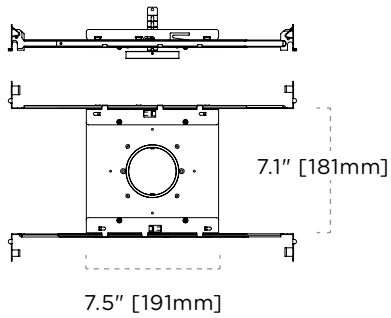

Non-IC (1x2)

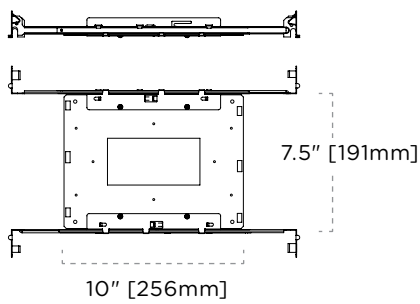


Non-IC (1x3)

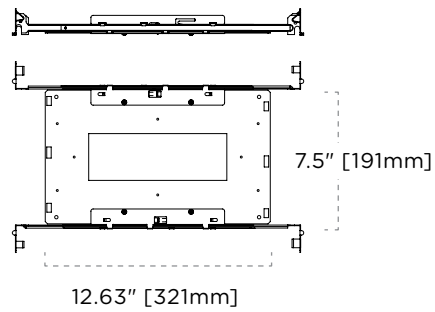


INSULATED AIRTIGHT—ROUND & SQUARE HOUSING DIMENSIONS

* Round line art shown. Round & Square housing dimensions are equal.


IC AIRTIGHT (IC3A)

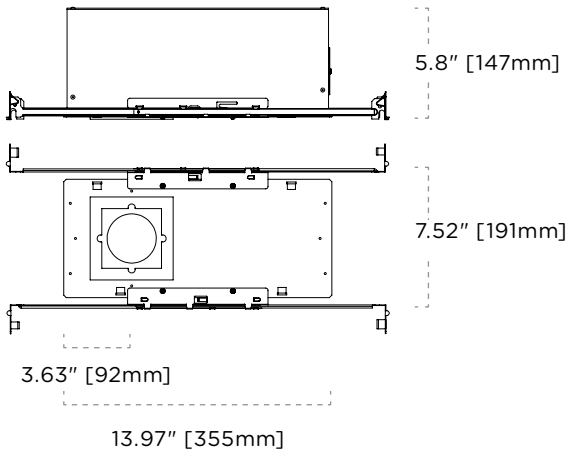


IC AIRTIGHT (IC4A)

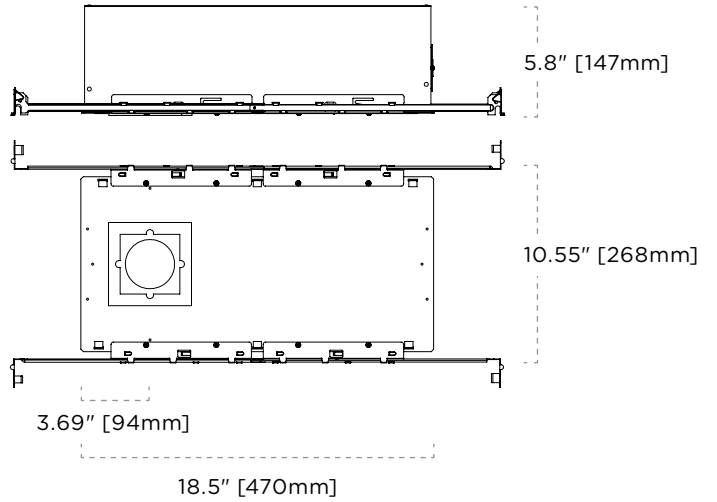


TRIMLESS IC AIRTIGHT (IC3A)

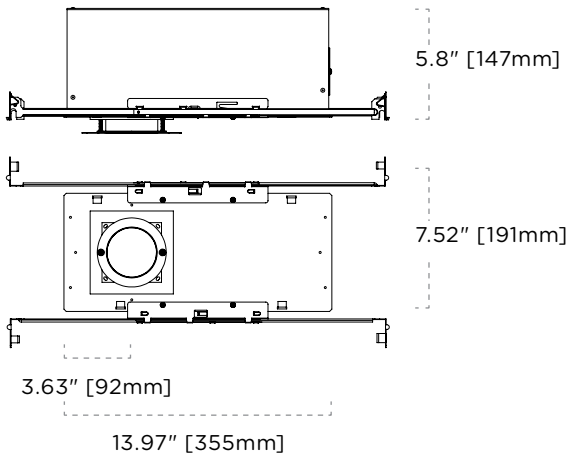


TRIMLESS IC AIRTIGHT (IC4A)

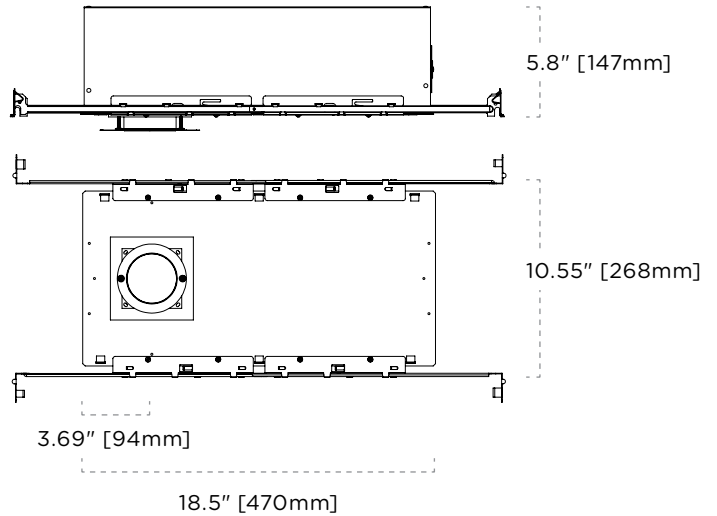

WOOD TRIMLESS IC AIRTIGHT (IC3A)

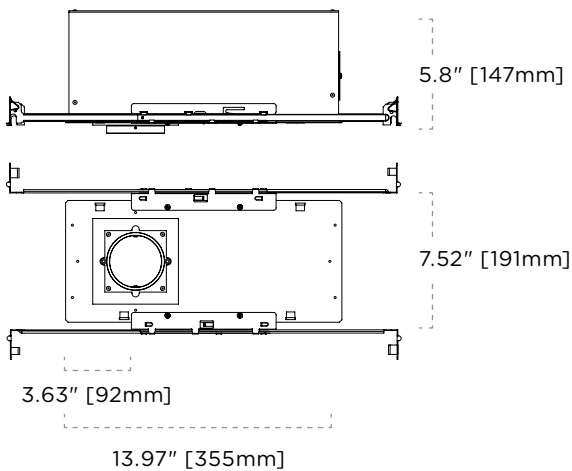


WOOD TRIMLESS IC AIRTIGHT (IC4A)

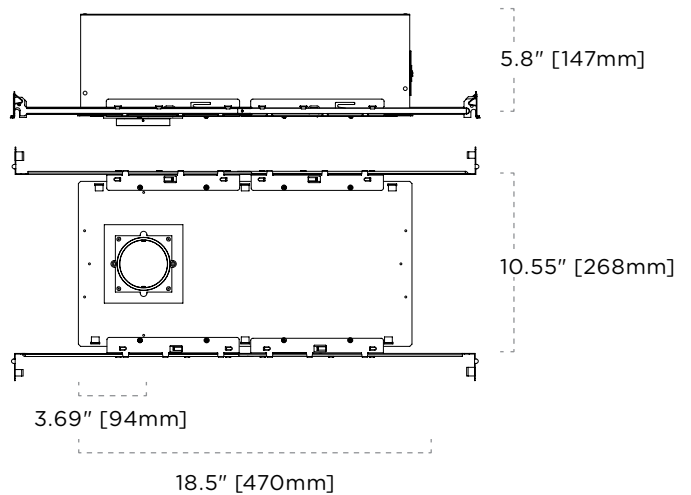


CHICAGO PLENUM—ROUND & SQUARE HOUSING DIMENSIONS

* Round line art shown. Round & Square housing dimensions are equal.


CHICAGO PLENUM (CP3A)

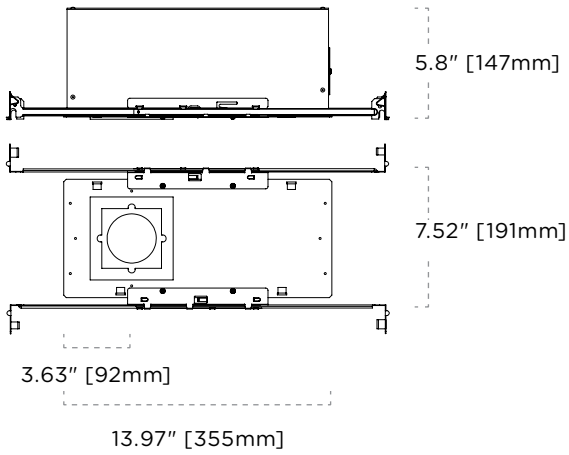


CHICAGO PLENUM (CP4A)

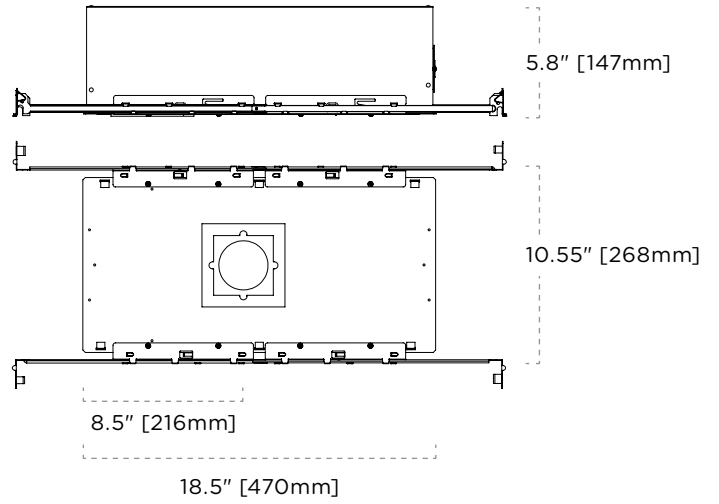


TRIMLESS CHICAGO PLENUM (CP3A)

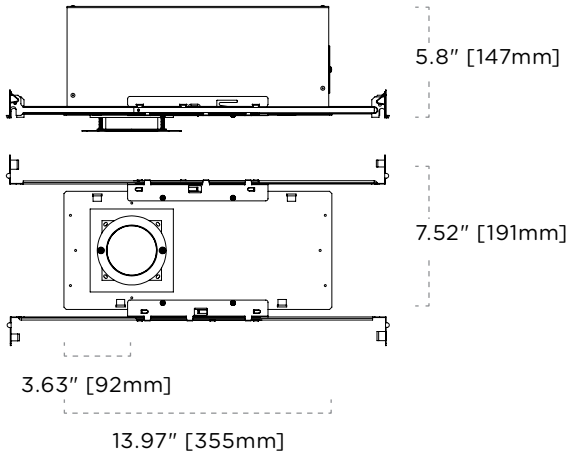

TRIMLESS CHICAGO PLENUM (CP4A)

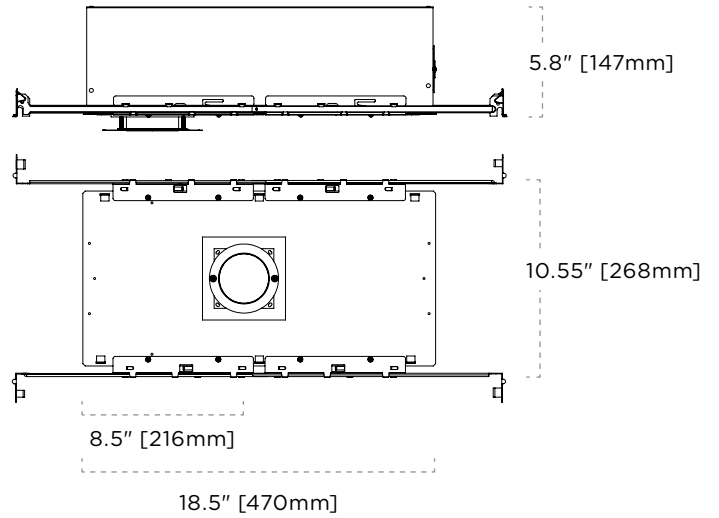

WOOD TRIMLESS CHICAGO PLENUM (CP3A)

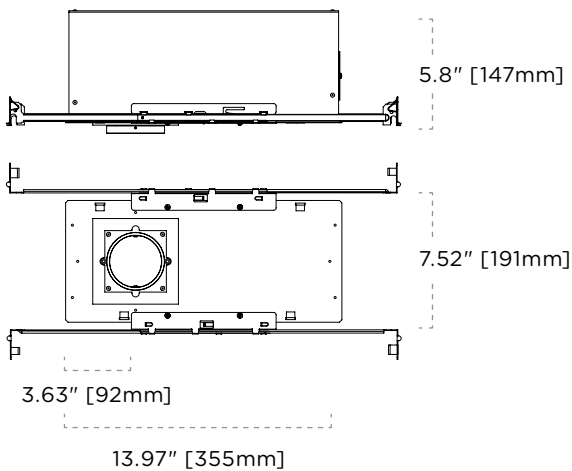

WOOD TRIMLESS CHICAGO PLENUM (CP4A)

