



# Legacy Downlights

2-112-T | Health LED

## Round Wall Wash

The Round Wall Wash trim employs a strategically placed reflector and lens combination to cast a broad asymmetric beam. Perfect for brightening feature walls, both indoors and in wet locations: showers, spas, entry ways, outdoor living rooms, and dining areas. The BIOS® SkyBlue Dynamic Spectrum lighting provides full daytime circadian stimulus, communicating directly with human circadian biology.

### FEATURES

- Ø 3 5/8" [93mm] Aperture
- Wet location listed
- 20° Fixed vertical tilt
- Ideal spacing 30" on center and 24" away from the wall
- Dimming from High M/P LED Spectrum @ 3500K to Low M/P LED Spectrum @ 3000K
- Die-cast aluminum fixture
- Powder coated and plated trim ring finishes
- Trim clips designed for 5/8" ceiling thickness

### LISTINGS




Wet  
Location



BIOS® SkyBlue  
Dynamic Spectrum

### DIMENSIONS—3 SERIES




4" [102mm]

Ø 3 5/8" [93mm] Aperture

Ø 5" [127mm]

5 1/8" [131mm]

### DIMENSIONS 5 & 7 SERIES



4 1/2" [115mm]

Ø 3 5/8" [93mm] Aperture

Ø 5" [127mm]

5 1/8" [131mm]

### PERFORMANCE SUMMARY

Color Rendering (CRI)	83
Lumen Series	3
Source Lumens	1000
LED Wattage	12
Lumen Series	5
Source Lumens	1800
LED Wattage	17
Lumen Series	7
Source Lumens	2300
LED Wattage	24

# Legacy Downlights

2-112-T | Health LED

## Round Wall Wash



### TAG TYPE

--	--	--	--	--	--

### ORDER FORM

1	2	3	4	5	6

#### 1. TRIM

**2-112-T** Round Wall Wash Downlight

#### 2. FLANGE FINISH

- 01** White
- 02** Chrome Plated
- 04** Black
- 05** Matte Silver
- 06** Bronze
- 11** Matte Nickel
- CC** Custom Color<sup>1</sup>

#### 3. MODULE & BEAM SPREAD

**BDY40** 40° Beam, BIOS-DY Dynamic Module

#### 4. COLOR TEMPERATURE

**35** 3500K

#### 5. CRI, LUMENS, SERIES

- 8310** 83 CRI, 1000lm, 3 Series
- 8318** 83 CRI, 1800lm, 5 Series
- 8323** 83 CRI, 2300lm, 7 Series

#### 6. OPTIONS

**EXT** Extension Clips (Maximum 2")

#### NOTES


**1** CC custom color requires consultation with Lightheaded sales personnel.

## SPECIFICATIONS


### FLANGE FINISHES

-  White
-  Chrome Plated
-  Black
-  Matte Silver
-  Bronze
-  Matte Nickel


### COLOR TEMPERATURES

-  3500K

### BEAM SPREADS




### DYNAMIC SPECTRAL POWER DISTRIBUTION

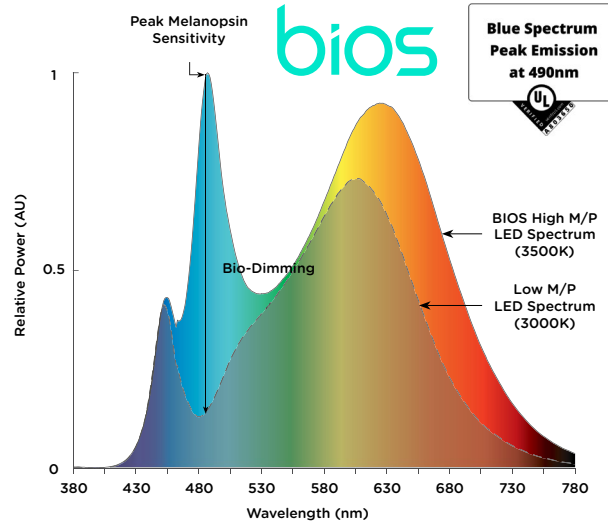


## COMPATIBLE HOUSINGS

### NON-INSULATED/FRAME IN

D4BDY-F-R  
 3, 5 Series  
 L 10.5" W 7.75" H 4.5"  
 L 267mm W 197mm H 115mm




D4BDY-F-R  
 7 Series  
 L 13.75" W 10.875" H 4.5"  
 L 350mm W 277mm H 115mm



### INSULATED AIRTIGHT

D4BDY-IC1A-R  
 3 Series  
 L 22.5" W 8.5" H 5.875"  
 L 572mm W 216mm H 150mm



## CERTIFICATIONS

